

3 - 1

Input					
Description	Min	Typ	Max	Units	Comment
Voltage	90	100~240	264	VAC	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min	Typ	Max	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection,Sea level
Storage Temperature	-20	-	65	°C	Free Convection,Sea level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing

Typical model list

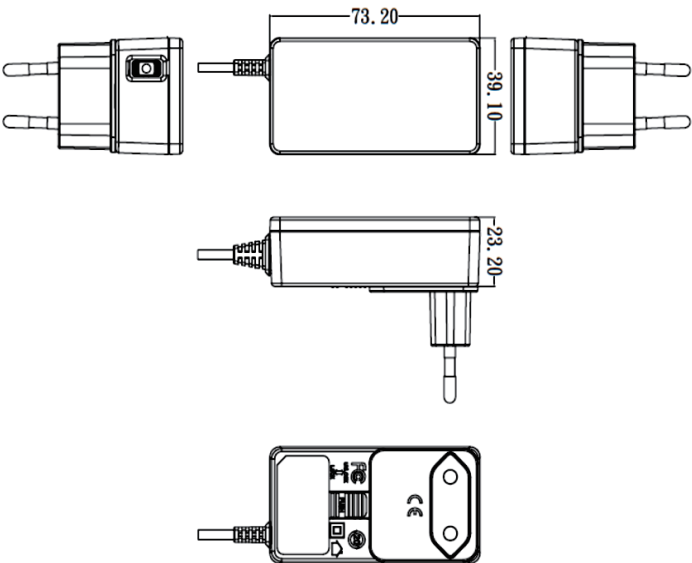
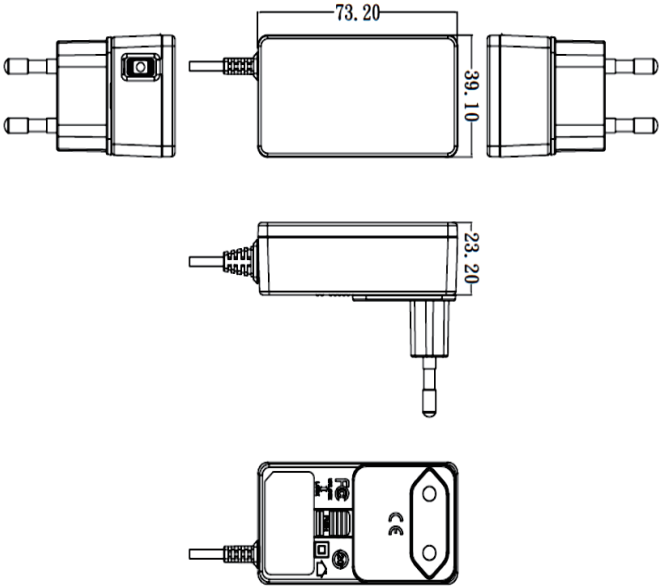
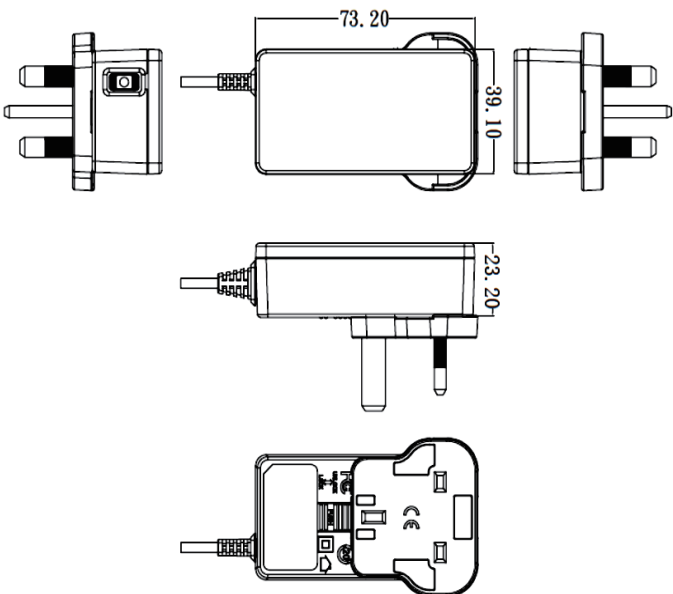
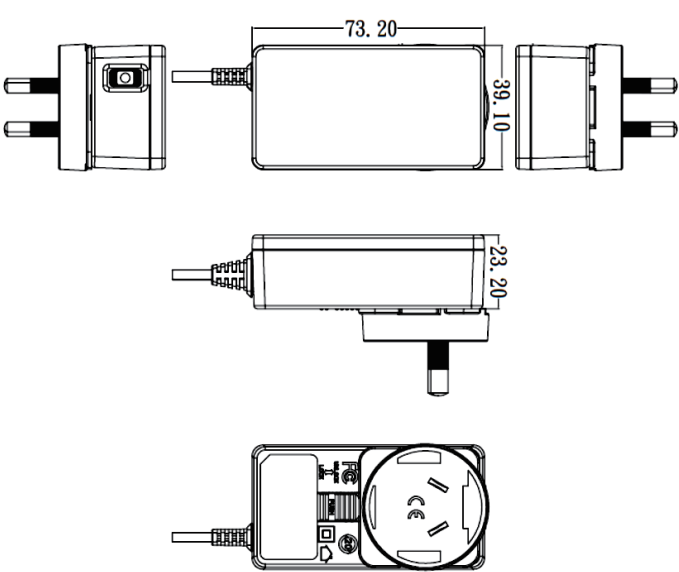
Input Condition		DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple & Noises	Regulation		Option/Remark
						Line	Load	
Input Voltage: 90V-264Vac Frequency: 47-63Hz	1	5V	2.0A	±5%	300mV	2%	10%	
	2	12V	0.8A	±5%	240mV	2%	10%	
	3	12V	1.0A	±5%	300mV	2%	10%	
	4	24V	0.5A	±5%	240mV	2%	10%	
		-	-	-	-	-	-	-

■ Measurement condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec

UUAL Series	UUAZ Series

UUA Series	UUA Series
	
UUA Series	UUA Series
	

the following blank