



Safety , Efficient & Earth friendly

AC/DC Adaptor 5W Series Wall Mount

UW Series



Product Highlights:

- ✓ Stability
- ✓ Ultra small size
- ✓ Light weight
- ✓ Energy efficiency
- ✓ Suit MP3 player, Mobile Phone, Portable GPS device, PDA

Protection:

- ✓ Short circuit protection
- ✓ Over Voltage Protection
- ✓ Over Current Protection

Efficiency:

- ✓ CEC Level 5

Safety Approvals:

- ✓ CE (Low Voltage Directive)
- ✓ PSE
- ✓ CEC-400

Emissions:

- ✓ CE CISPR 22 Class B
- ✓ CNS13438 Class B

Immunity:

- ✓ EN55024/A1:2001
- ✓ Electrostatic discharge: 61000-4-2
- ✓ Radiated electromagnetic fields:61000-4-3
- ✓ Fast transients (Burst): 61000-4-4
- ✓ Surge transients: 61000-4-5
- ✓ Conducted disturbance: 61000-4-6
- ✓ Voltage dips, interruptions & Variations:61000-4-11

Electrical Spec:

Absolute Maximum Rating

Input					
Description	Min	Typ	Max	Units	Comment
Voltage	90	120/240	264	VAC	2 Wire No Protection Ground
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min	Typ	Max	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection,Sea level
Non-Operating Temperture	-20	-	65	°C	Free Convection,Sea level
Operating Humidity	10	-	90	%RH	No Condensing
Non-Operating Humidity	10	-	90	%RH	No Condensing

Typical model list:


AC/DC Adaptor 5W Series Wall Mount

Input Condition		DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple & Noises	Regulation		Option/Remark
						Line	Load	
Input Voltage: 90V-132Vac Frequency: 47-63Hz	1	4.2V	0.7A	±5%	300mV	±1%	±5%	
	2	5V	0.5A	±5%	300mV	±1%	±5%	
	3	5V	1.0A	±5%	300mV	±1%	±5%	
	4	5.3V	0.8A	±5%	300mV	±1%	±5%	
	5	5.6V	0.55A	±5%	300mV	±1%	±5%	
	6	5.6V	0.6A	±5%	300mV	±1%	±5%	
	7	6V	0.6A	±5%	300mV	±1%	±5%	
	8	8.4V	0.45A	±5%	300mV	±1%	±5%	
	9	12V	0.4A	±5%	300mV	±1%	±3%	
	10	-	-	-	-	-	-	-

Measurement condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec:

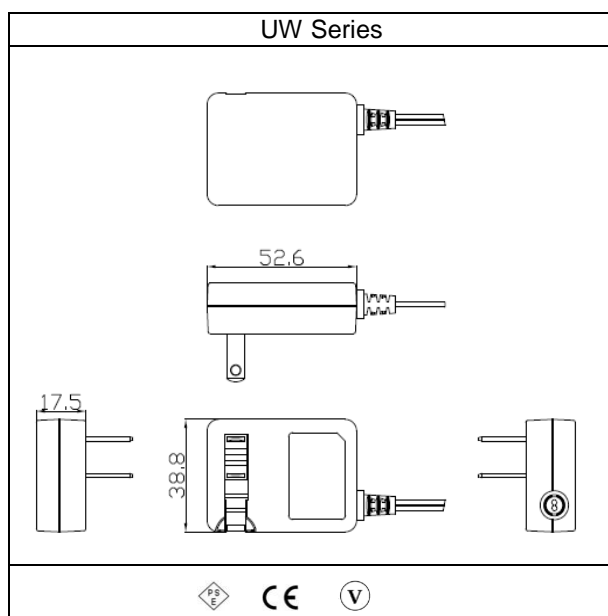

Packing Spec:

Type	Pcsper Carton	Gross Weight (kg)	Net Weingt(kg)	Size(mm)	CBM(m2)	Container	Ctn/Contai ner	Pcs/Contai ner	Gross Weingt (Ton)	Remark
UW305	100	6.2	4.7	406x250x298	1x1.2	20	800	80000	5200	With Gift Box
	120	8.64	5.64	565x393x255	1x1.2	20	400	48000	3696	Bulk package