



Safety , Efficient & Earth friendly

AC Pin Interchangeable AC/DC Adaptor 5W Series

UBX Series

Product Highlights:


- ✓ Stability
- ✓ Ultra small size
- ✓ Light weight
- ✓ Energy efficiency
- ✓ Suit MP3 player, Mobile Phone, Portable GPS device, PDA

Protection:

- ✓ Short circuit protection
- ✓ Over Voltage Protection
- ✓ Over Current Protection

Efficiency:

- ✓ DOE Level 6

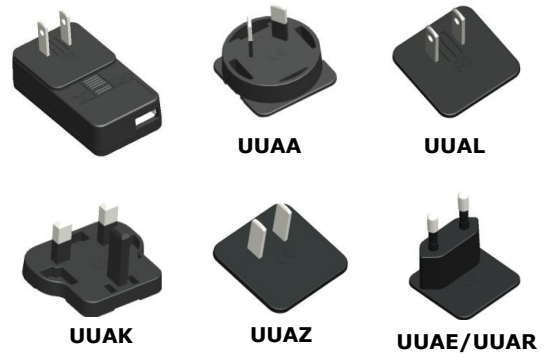

Safety Approvals:

- ✓ UL60950
- ✓ CAN/CSA C22.2 NO. 60950
- ✓ EN60950-1
- ✓ CE (Low Voltage Directive)
- ✓ PSE
- ✓ CEC-400
- ✓ AS/NZS 60950.1
- ✓ IEC 60950
- ✓ CNS14336

Emissions:

- ✓ FCC Part15 Class B
- ✓ CE CISPR 22 Class B
- ✓ VCCI Class B
- ✓ AS/NZSCISPR22
- ✓ CNS13438 Class B

Immunity:

- ✓ EN55024/A1:2001
- ✓ Electrostatic discharge: 61000-4-2
- ✓ Radiated electromagnetic fields:61000-4-3
- ✓ Fast transients (Burst): 61000-4-4
- ✓ Surge transients: 61000-4-5
- ✓ Conducted disturbance: 61000-4-6
- ✓ Voltage dips, interruptions & Variations:61000-4-11

Electrical Spec: Absolute Maximum Rating

Input					
Description	Min	Typ	Max	Units	Comment
Voltage	90	120/240	264	VAC	2 Wire No Protection Ground
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min	Typ	Max	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection,Sea level
Non-Operating Temperature	-20	-	65	°C	Free Convection,Sea level
Operating Humidity	10	-	90	%RH	No Condensing
Non-Operating Humidity	10	-	90	%RH	No Condensing

Typical model list:


AC Pin Interchangeable AC/DC Adaptor 5W Series

Input Condition		DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple & Noises	Regulation		Option/Remark
						Line	Load	
Input Voltage: 90V-264Vac Frequency: 47-63Hz	1	5V	0.5A	±5%	100mV	±1%	±5%	
	2	5V	1.0A	±5%	150mV	±1%	±5%	
	3	-	-	-	-	-	-	-

Measurement condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec:

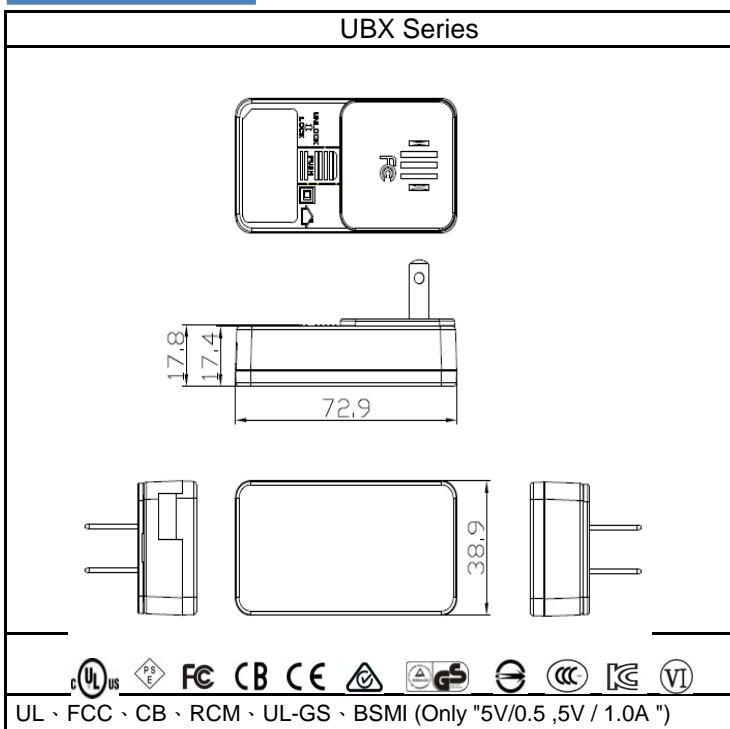

Packing Spec:

Type	Pcsper Carton	Gross Weight (kg)	Net Weieht(kg)	Size(mm)	CBM(m2)	Container	Ctn/Contai ner	Pcs/Contai ner	Gross Weingt (Ton)	Remark
UBX305	144	6.2	4.7	565x393x255	1x1.2	20	400	50400	2720	With Gift Box