



Product Highlights:

- ✓ Stability
- ✓ Ultra small size
- ✓ Energy efficiency
- ✓ Suit MP3 player, Mobile Phone, Portable GPS device, PDA

Protection:

- ✓ Short circuit protection
- ✓ Over Voltage Protection
- ✓ Over Current Protection


Typical model list:

Input Condition		DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple & Noises	Regulation		Option/Remark
						Line	Load	
Input Voltage: 10V-28Vac	1	5V	2.1A	±5%	100mV	±1%	±5%	
	2	-	-	-	-	-	-	-

Measurement condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec:

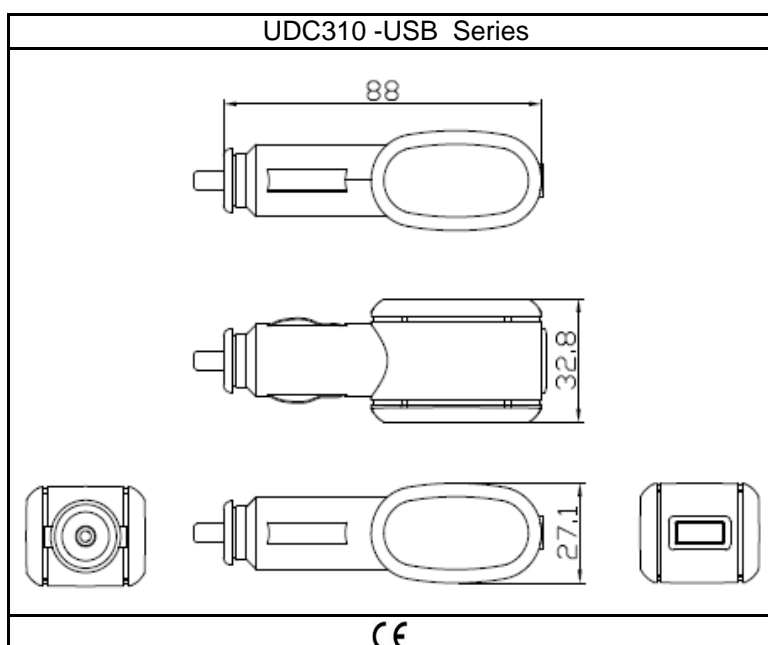

Packing Spec:

Type	Pcsper Carton	Gross Weight (kg)	Net Weihgt(kg)	Size(mm)	CBM(m2)	Container	Ctn/Contai ner	Pcs/Contai ner	Gross Weingt (Ton)	Remark
UDC305-USB	320	5	3.5	565*393*255	1x1.2	20	400	128000	2240	With Gift Box