

Table of contents(目錄)

Paper

1-1.Line&Load Regulation And Temperature Chafaile Character (輸入&負荷及溫度變動特性)-----	4
1-2.Ripple And Noise Character(紋波特性)-----	5~6
1-3.Over-Voltage Protection (過電壓保護特性)-----	7
1-4.Over-Current Protection (過電流保護特性)-----	8
1-5.Dynamic ripple Character(動態負載特性)-----	9
1-6.Efficiency Character(效率特性)-----	10
1-7.Input&Load Change Character(輸入&負荷變動特性)-----	11
1-8.Inrush Current (浪涌電流)-----	12
1-9.Turn On Delay(開機爬升延遲時間)-----	13
2-1.Hold Up Time Character (保持時間)-)-----	14
2-2.Low Vac Shut Off (輸入欠壓關斷特性)-----	15
2-3. Over Shoot(過沖特性)-----	16
2-4.Under Shoot(下沖特性)-----	17
2-5.Leak Current (漏電流特性)-----	18

Evaluation Method 評價方法

Circuit used for determination 特性電路圖

Circuit 1 特性回路1

Line&Load Regulation And Temperature Chafaile Character (輸入& 負荷及溫度變動特性)

Over-Voltage Protection (過電壓保護特性)

Over-Current Protection (過電流保護特性)

Dynamic ripple Character(動態負載特性)

Efficiency Character(效率特性)

Input&Load Change Character(輸入& 負荷變動特性)


Turn On Delay(開機爬升延遲時間)

Hold Up Time Character (保持時間)

Low Vac Shut Off (輸入欠壓關斷特性)


Over Shoot(過沖特性)

Under Shoot(下沖特性)

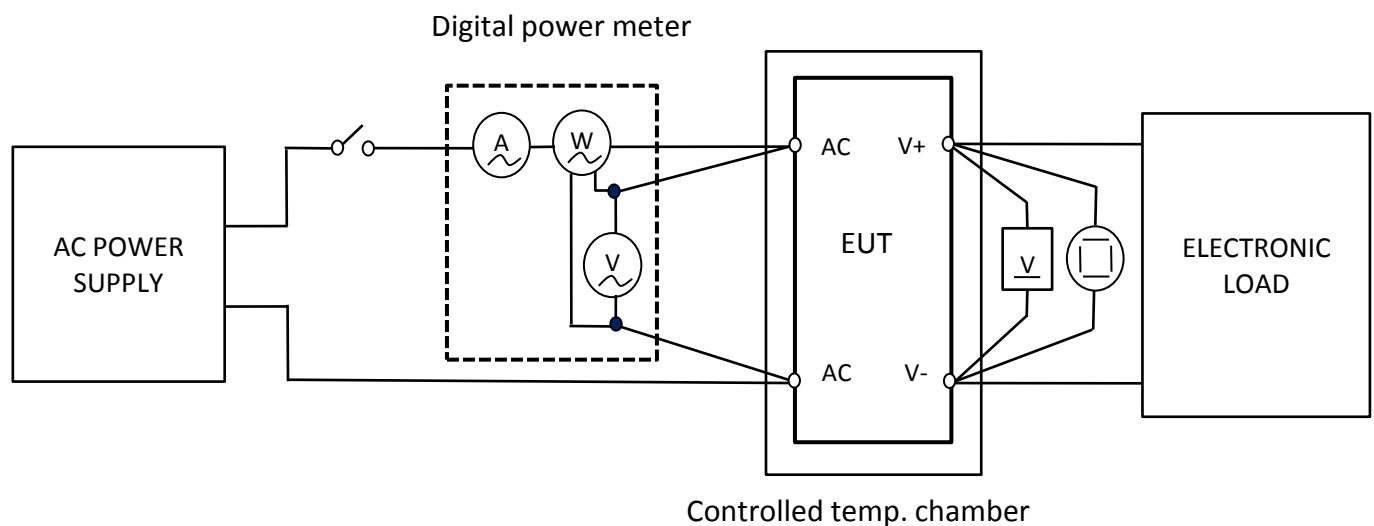


Circuit 2 特性回路2

Inrush Current (浪涌電流)

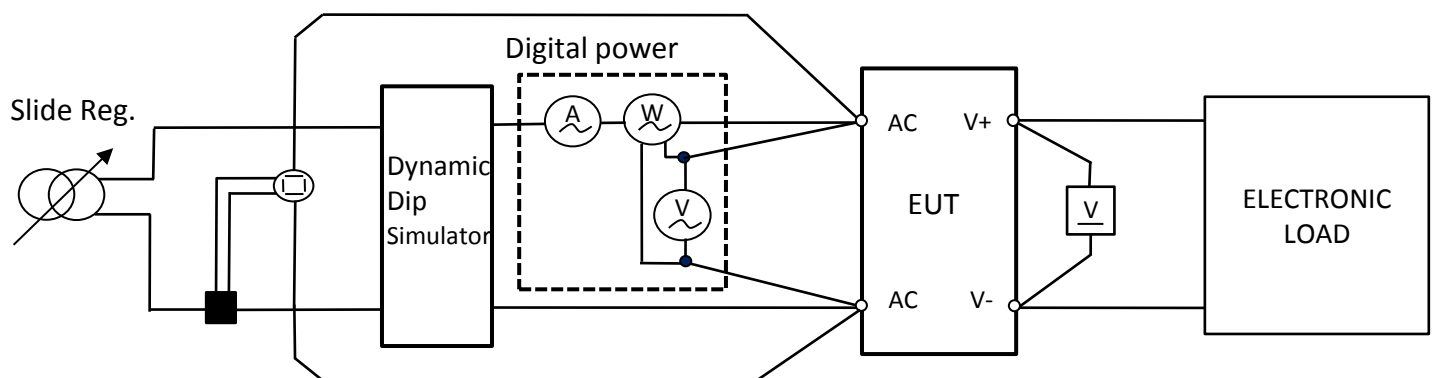


Circuit 3 特性回路3

Leak Current (漏電流特性)

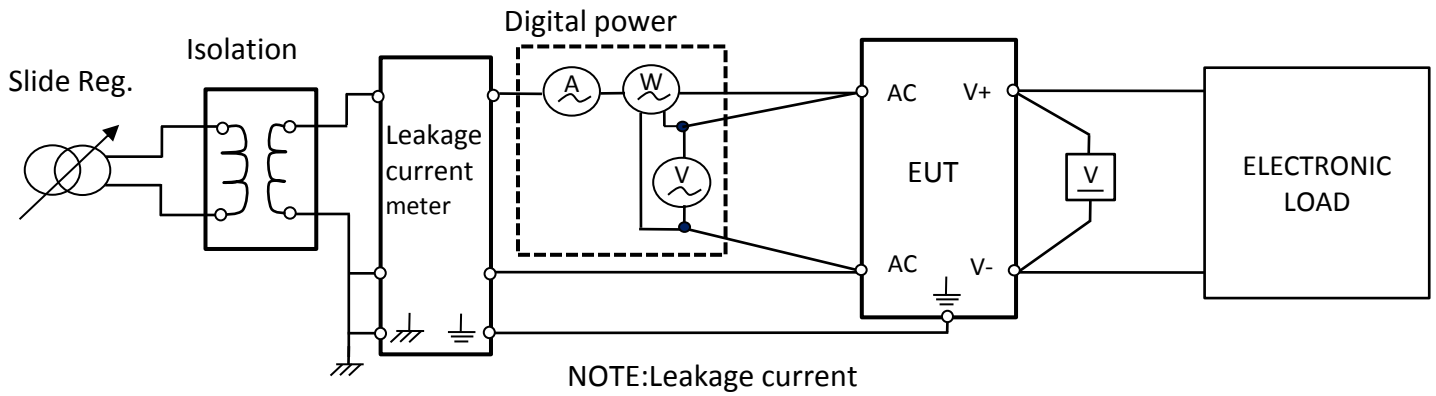

Circuit 4 特性回路4

Ripple And Noise Character(紋波特性)

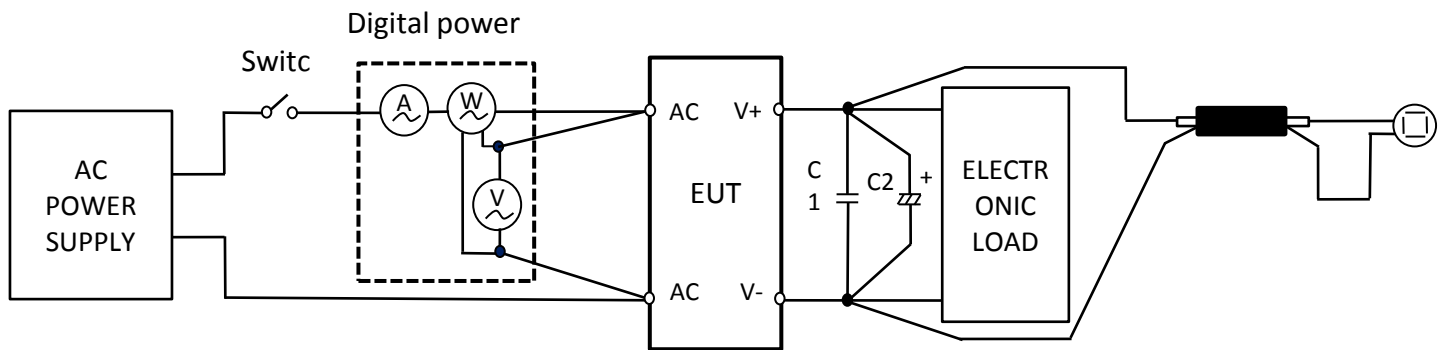

C1 : 0.1 μ F CERAMICS CAPACITOR

C2 : 10 μ 100V ALUMINUM CAPACITOR

THE BANDWIDTH OF OSCILLOSCOPE IS SET WITH 20MHz

1.ELECTRICAL FUNCTION Character(電氣特性)

1-1.Line&Load Regulation And Temperature Chafaile Character (輸入& 負荷及溫度變動特性)

※ Character Condition(特性條件) :

1	I/P Voltage(Vac)(輸入電壓)	85Vac/100Vac/240Vac/265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz ~63Hz
3	Output Load(輸出負載)	0%,25%,50%,75%,100% Of Full Load
4	Regulation(調整率)	Load Regulation: $\leq 10\%$; Line Regulation $\leq 2\%$
5	Ambient Temp.(°C)(環境溫度)	25°C
6	Sample Size(取樣數)	1PCS

Output voltage	15.0V
----------------	-------

※ Character Data(特性數據) :

O/P \ I/P	85Vac/63Hz	100Vac/60Hz	240Vac/50Hz	265Vac/47Hz	Line Regulation $\leq 2\%$
0%	15.063V	15.063V	15.087V	15.088V	0.17%
25%	15.03V	15.03V	15.049V	15.051V	0.14%
50%	14.995V	14.995V	15.0V	15.014V	0.13%
75%	14.96V	14.96V	14.967V	14.975V	0.10%
100%	14.924V	14.925V	14.933V	14.935V	0.07%
Load Regulation: $\leq 10\%$	0.93%	0.92%	1.03%	1.02%	

1-2.1 Ripple And Noise Character (紋波與雜訊)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	85Vac/100Vac/240Vac/265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz ~63Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	-10°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

I/P	85Vac/63Hz		100Vac/60Hz		240Vac/50Hz		265Vac/47Hz	
ITEM	Ripple	Noise	Ripple	Noise	Ripple	Noise	Ripple	Noise
-10°C	94.0mV	98.0mV	94.0mV	108.0mV	84.0mV	86.0mV	82.0mV	88.0mV

※ Character Waveform (特性波形):

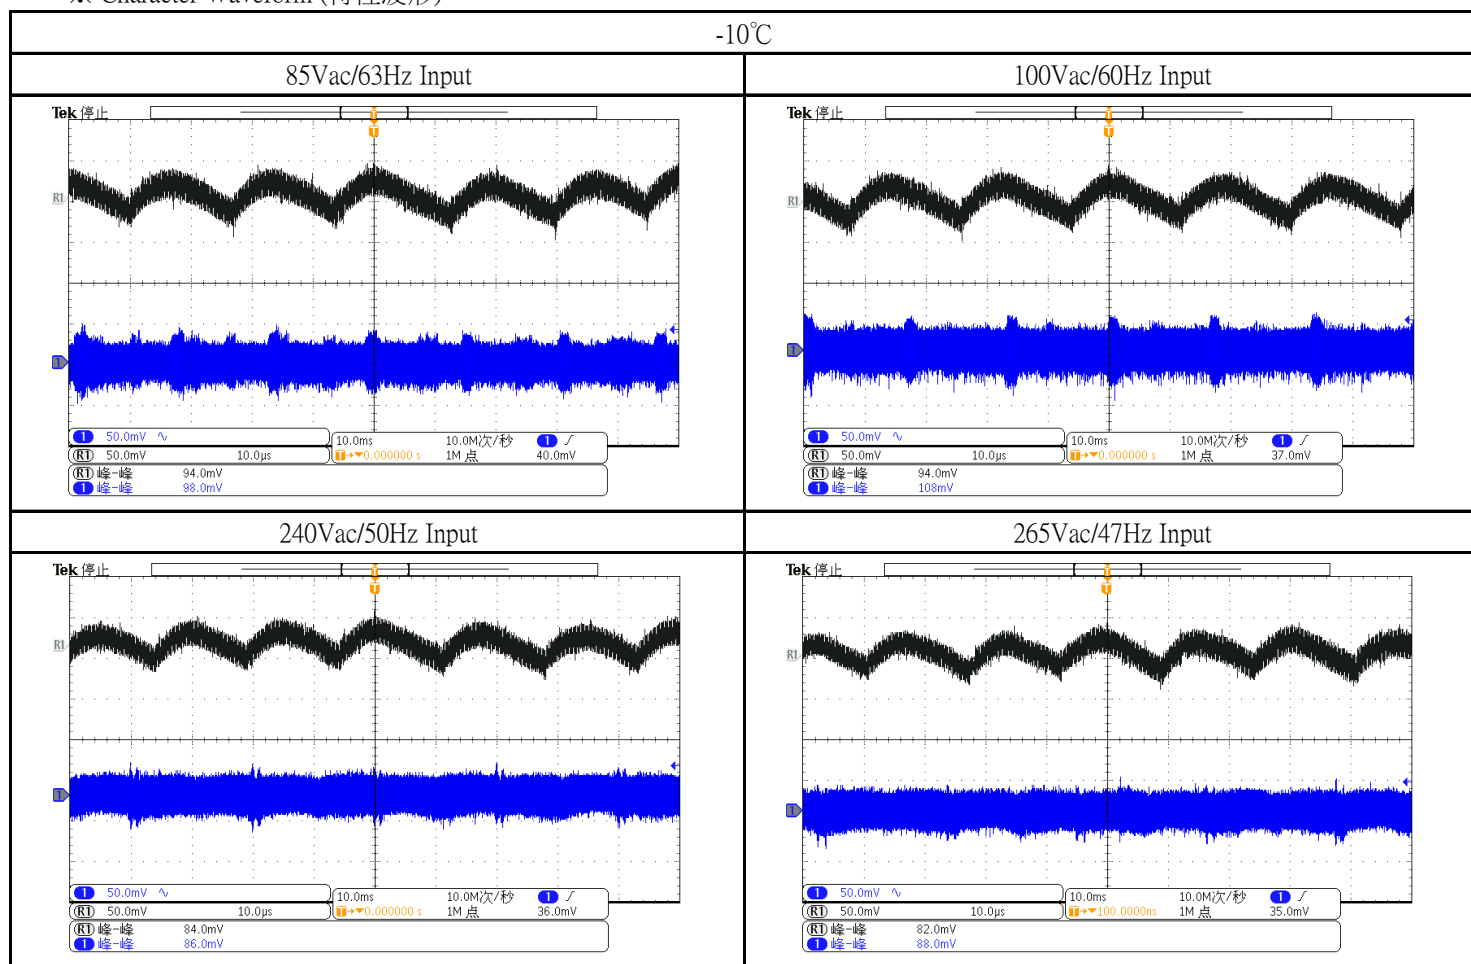

1-2.3 Ripple And Noise Character (紋波與雜訊)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	85Vac/100Vac/240Vac/265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz ~63Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	50°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

I/P	85Vac/63Hz		100Vac/60Hz		240Vac/50Hz		265Vac/47Hz	
ITEM	Ripple	Noise	Ripple	Noise	Ripple	Noise	Ripple	Noise
50°C	40.0mV	41.6mV	39.2mV	42.4mV	32.0mV	35.2mV	30.4mV	40.0mV

※ Character Waveform (特性波形):

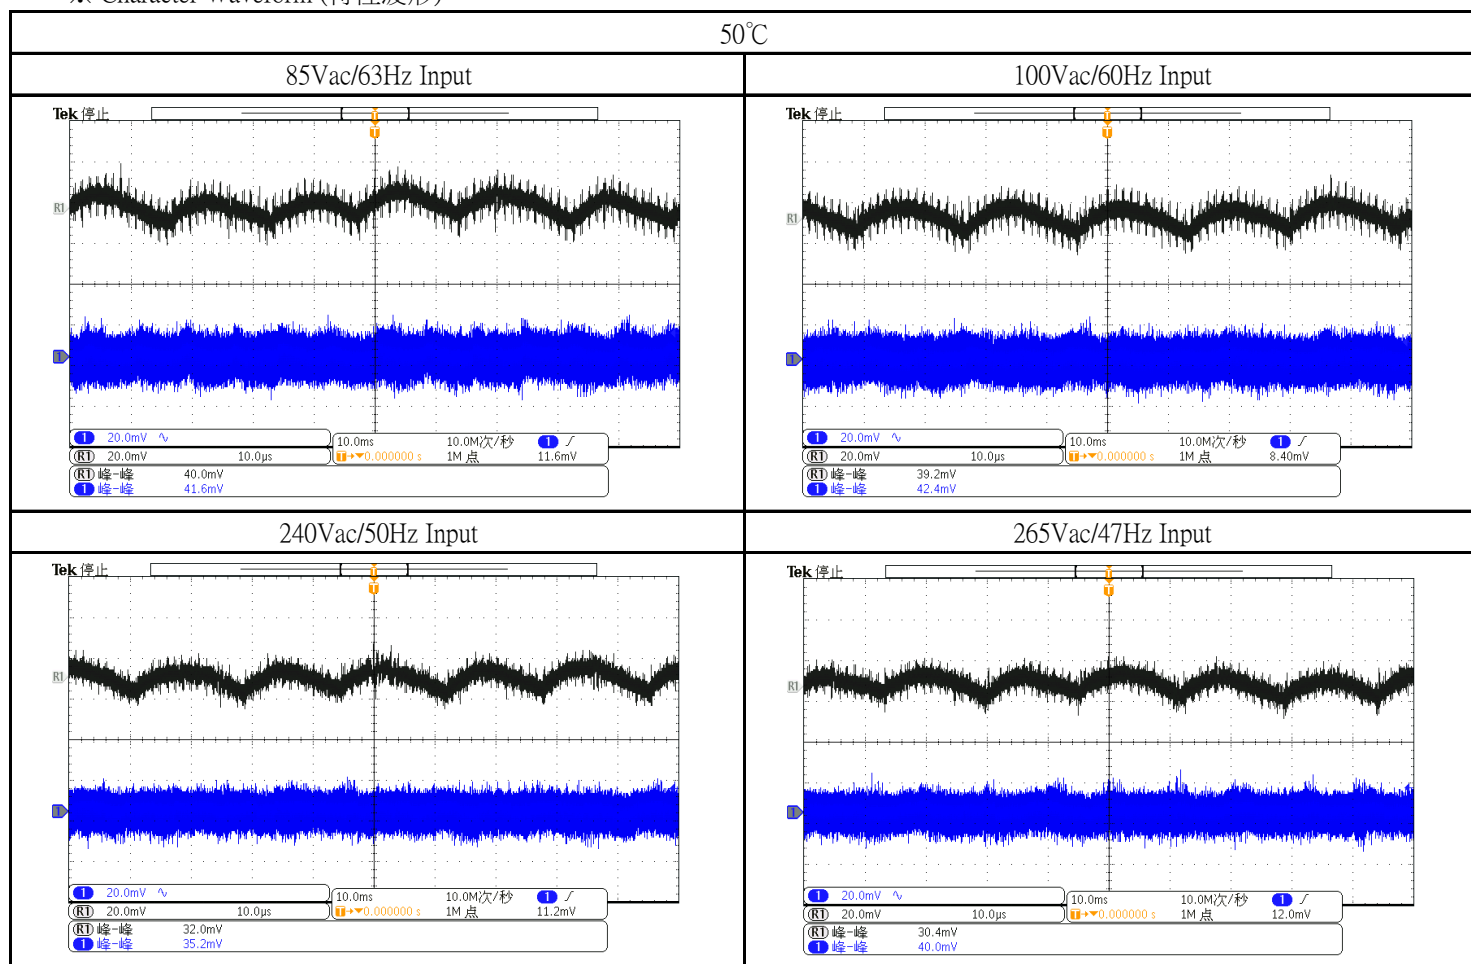

1-3.Over-Voltage Protection(過電壓保護特性)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	85Vac/265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz /63Hz
3	Output Load(輸出負載)	No/Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

O/P	No Load		Full Load	
I/P	85Vac/63Hz	265Vac/47Hz	85Vac/63Hz	265Vac/47Hz
Character Result	18.7V	18.8V	18.4V	18.4V

※ Character Waveform (特性波形):

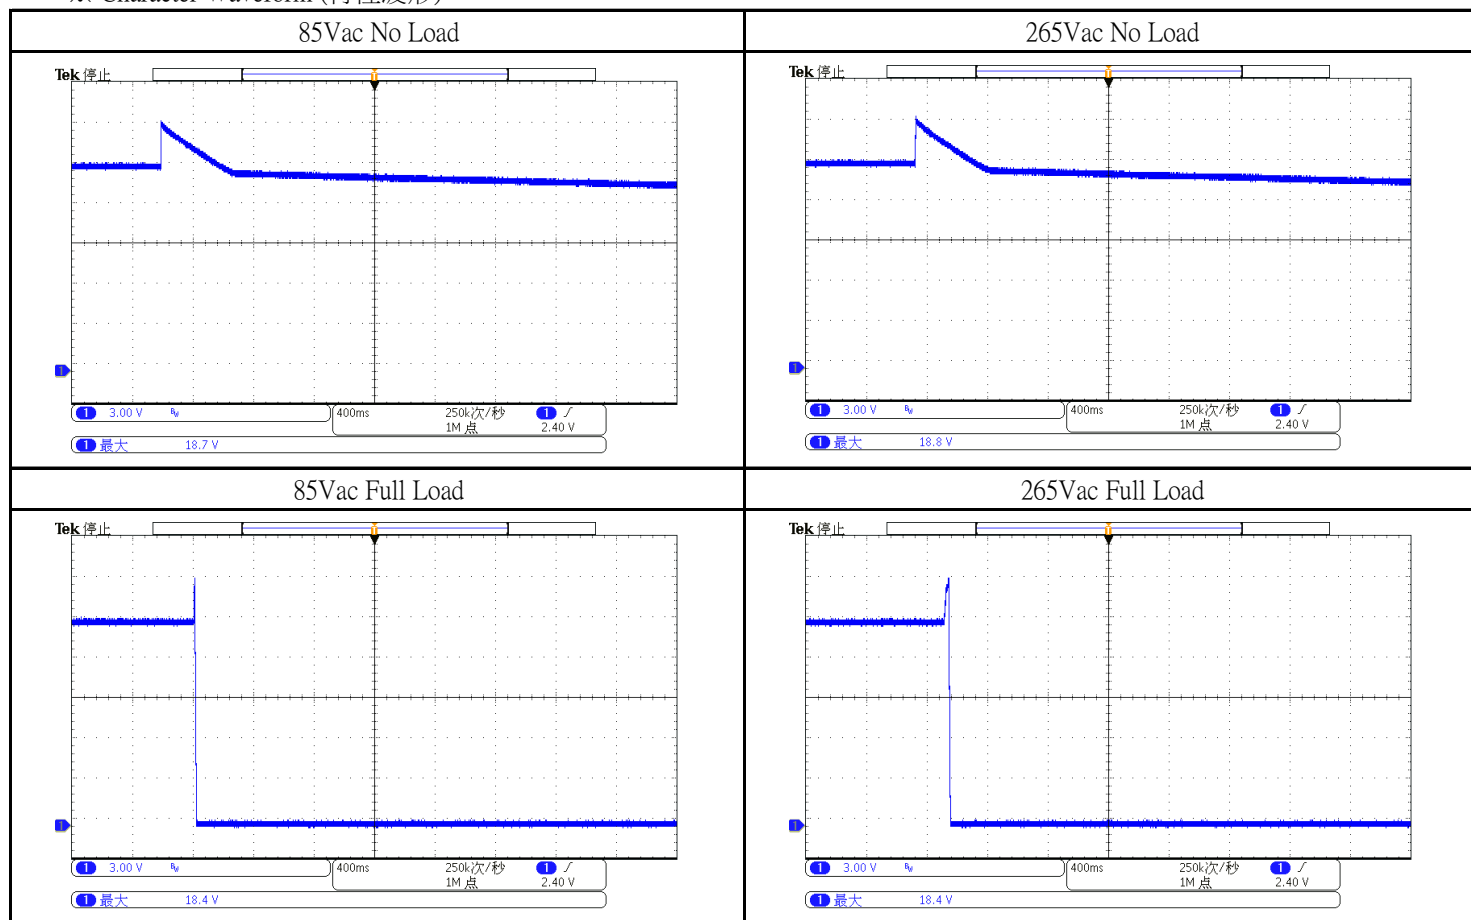

1-4.Over-Current Protection(過電流保護特性)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	85Vac/100Vac/240Vac/265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz ~63Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

I/P	85V/63Hz	100V/60Hz	240V/50Hz	265V/47Hz
O.C.P點	2.84A	2.94A	2.52A	2.44A

I/P	85V/63Hz										
Voltage(V)	15.09	14.961	14.949	14.935	14.934	14.93	14.93	14.896	0	0	0
Current(A)	0	2	2.2	2.43	2.44	2.51	2.52	2.83	2.84	2.93	2.94
I/P	100V/60Hz										
Voltage(V)	15.091	14.955	14.943	14.928	14.927	14.923	14.923	14.903	14.902	14.897	0
Current(A)	0	2	2.2	2.43	2.44	2.51	2.52	2.83	2.84	2.93	2.94
I/P	240V/50Hz										
Voltage(V)	15.091	14.96	14.946	14.932	14.931	14.929	0	0	0	0	0
Current(A)	0	2	2.2	2.43	2.44	2.51	2.52	2.83	2.84	2.93	2.94
I/P	265V/47Hz										
Voltage(V)	15.093	14.966	14.953	14.94	0	0	0	0	0	0	0
Current(A)	0	2	2.2	2.43	2.44	2.51	2.52	2.83	2.84	2.93	2.94

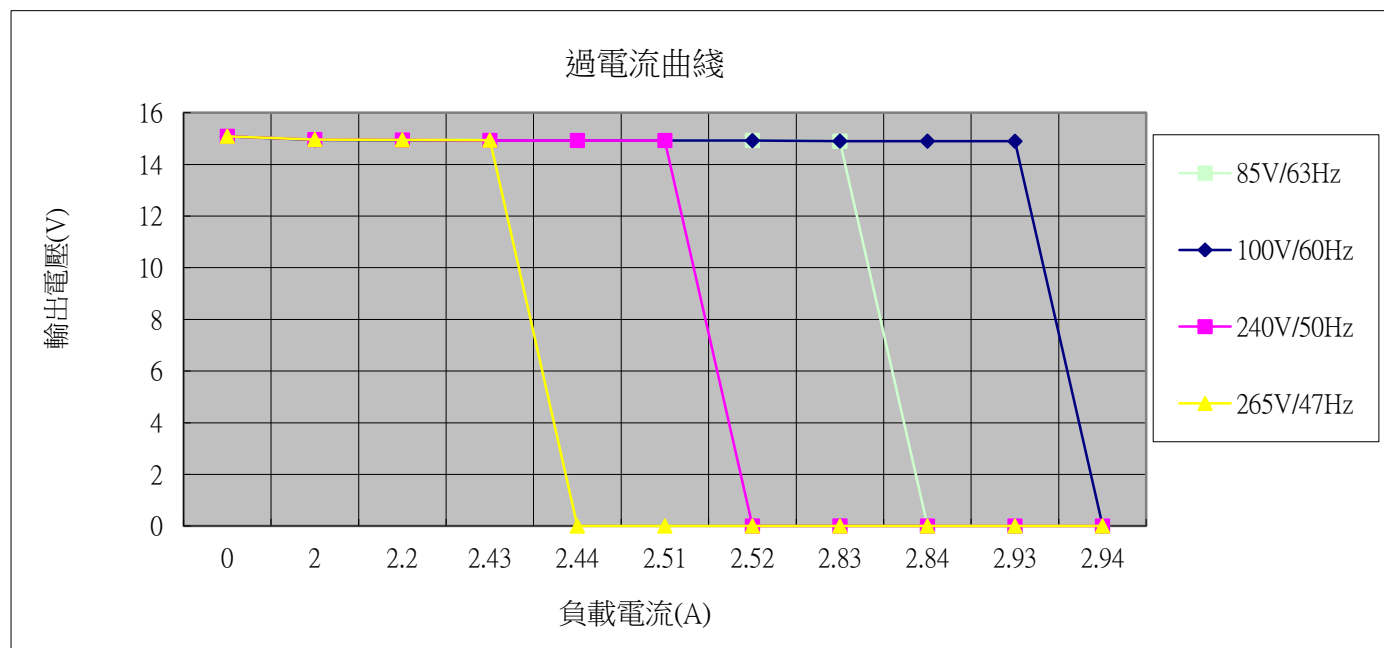

1-5. Dynamic ripple Character(動態負載特性)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	85Vac/265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz /63Hz
3	Output Load(輸出負載)	20%-80% Full Load,TH=5ms,TL=5ms,Slew rate=0.1A/us
4	Ambient Temp.(°C)(環境溫度)	-10°C/50°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

I/P	85Vac/63Hz		265Vac/47Hz	
O/P	Max	Min	Max	Min
-10°C	15.4V	14.5V	15.4V	14.5V
50°C	15.4V	14.5V	15.4V	14.5V

※ Character Waveform (特性波形):

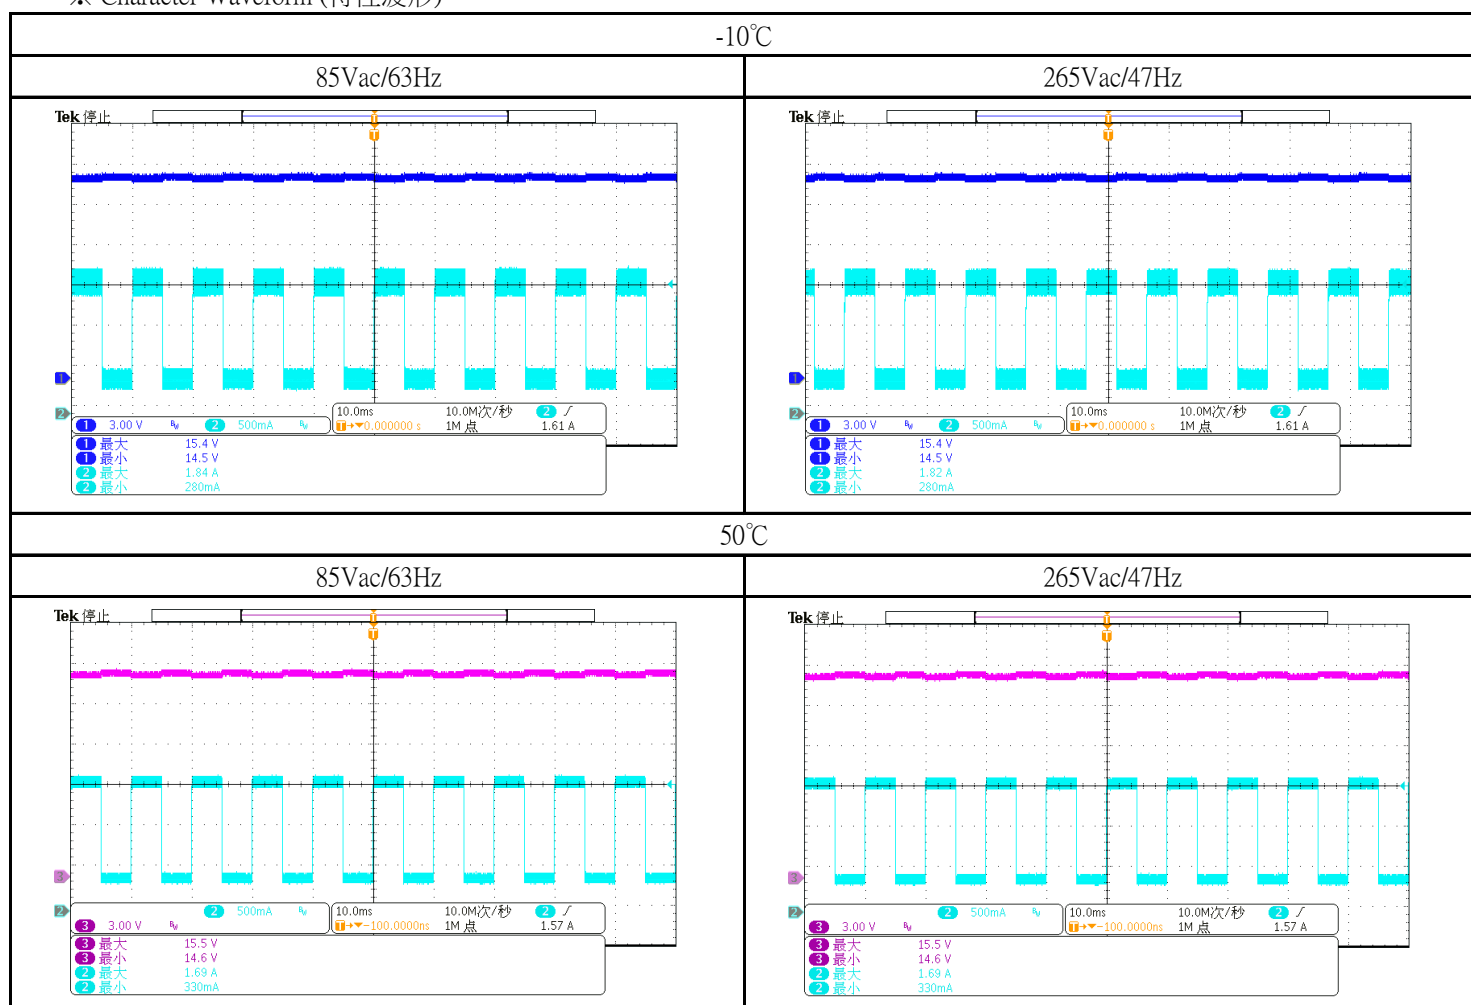

1-6.Efficiency Character(效率特性)

※ Character Condition(特性條件) :

1	I/P Voltage(Vac)(輸入電壓)	115Vac/230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz / 60Hz
3	Output Load(輸出負載)	0%,10%,25%,50%,75%,100% of Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS
6	Output Load(輸出負載)	2.0A

※ Character Data(特性數據) :

使用線材	N/A
------	-----

Efficiency								Stand by consumption	
Load		10% 25% 50% 75% 100%						0%	
I/P		115Vac/60Hz			230Vac/50Hz			Input 115V/60Hz	230V/50HZ
O/P Load		Pin (W)	Pout (W)	Efficiency (%)	Pin (W)	Pout (W)	Efficiency (%)	0.04W	0.09W
10%	0.2A	3.46	3.020	87.28%	3.59	3.020	84.12%		
25%	0.5A	8.46	7.540	89.13%	8.53	7.540	88.39%		
50%	1.0A	17.02	15.040	88.37%	16.95	15.050	88.79%		
75%	1.5A	25.61	22.520	87.93%	25.38	22.530	88.77%		
100%	2.0A	34.33	29.960	87.27%	33.86	29.970	88.51%		
Average				88.17%			88.62%		

1-7.Input&Load Change Character(輸入&負荷變動特性)

※ Character Condition(特性條件)：

1	I/P Voltage(Vac)(輸入電壓)	85Vac~265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz ~63Hz
3	Output Load(輸出負載)	No Load and Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS
6		

※ Character Equipment(特性設備)：

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	AC Source(變頻器)	ALL POWER/APG-1005N
2	Power Meter(功率表)	YOKOGAWA/WT310
3	DC Load(DC負載)	ITECH/IT8512+

※ Character Data(特性數據)：

Input change with no load			
No Load		Input Condition	
		85V/63Hz	265Vac/47Hz
	Input Current (A)	0.005	0.012
	Input Power (W)	0.033	0.094
Input change with full load			
Full Load		Input Condition	
		85V/63Hz	265Vac/47Hz
	Input Current (A)	0.645	0.27
	Input Power (W)	35.54	34.08

1-8.Inrush Current (浪涌電流)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	100Vac/230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz /60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

Inrush Current		
I/P \ O/P I(A)	Full Load	Full Load
	100Vac/60Hz	230Vac/50Hz
Character Result	12.0A	25.0A

※ Character Waveform (特性波形):

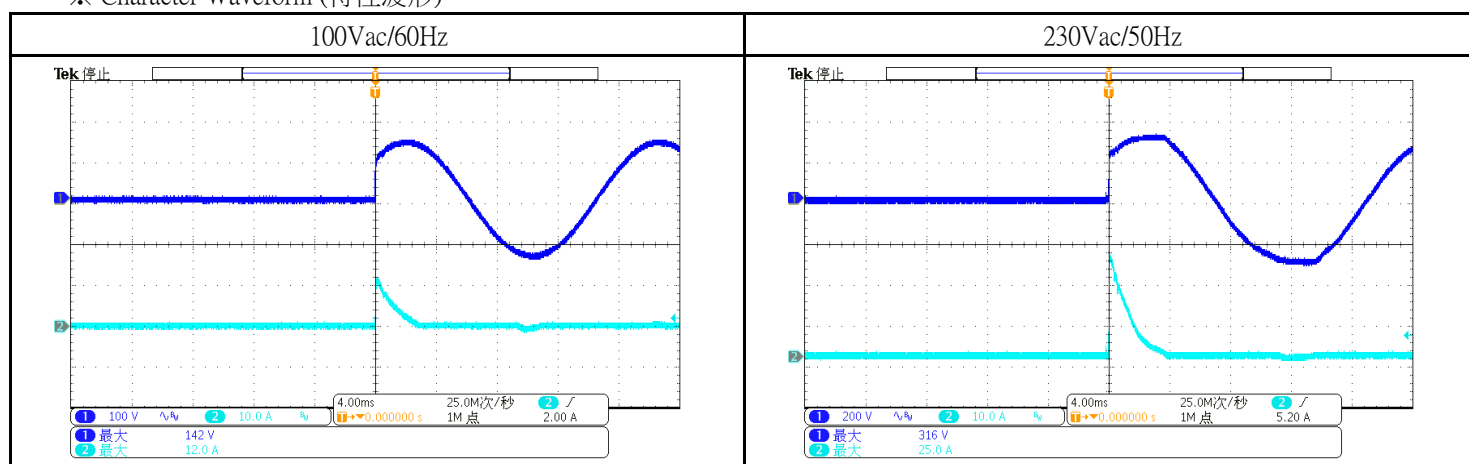

1-9.Turn On Delay(開機爬升延遲時間)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	85Vac
2	I/P Frequency(Hz)(輸入頻率)	63Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

Turn on delay time	
I/P	85Vac/63Hz
Character Result	2.688S

※ Character Waveform (特性波形):

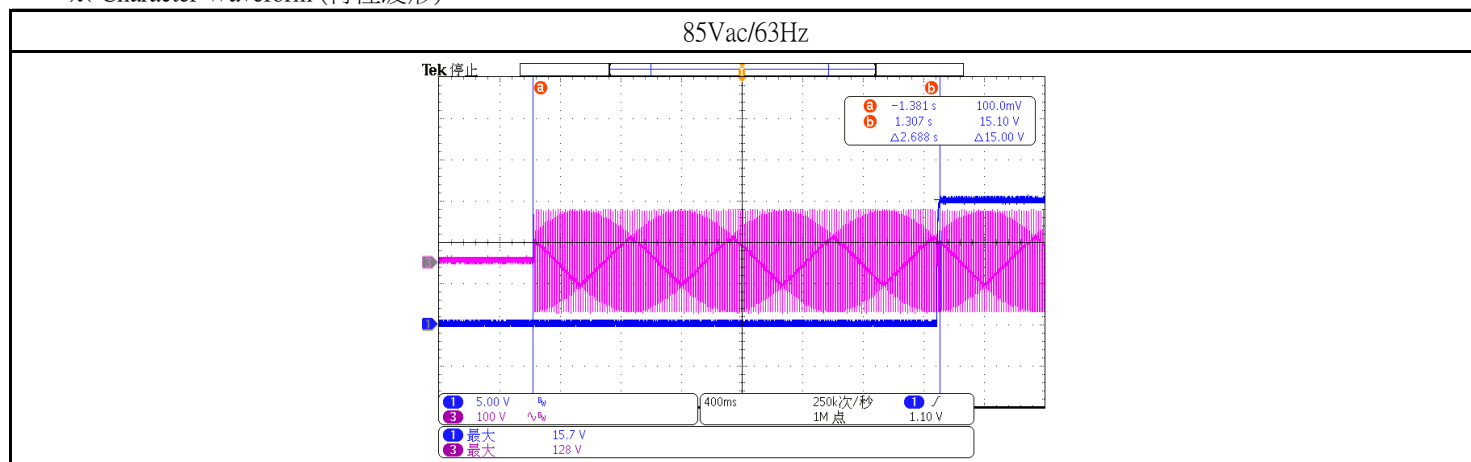

2-1. Hold Up Time Character (保持時間)


※ Character Condition(特性條件)：

1	I/P Voltage(Vac)(輸入電壓)	85Vac
2	I/P Frequency(Hz)(輸入頻率)	63Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據)：

Hold up time	
I/P	85Vac/63Hz
Character Result	26.52mS

※ Character Waveform (特性波形)：

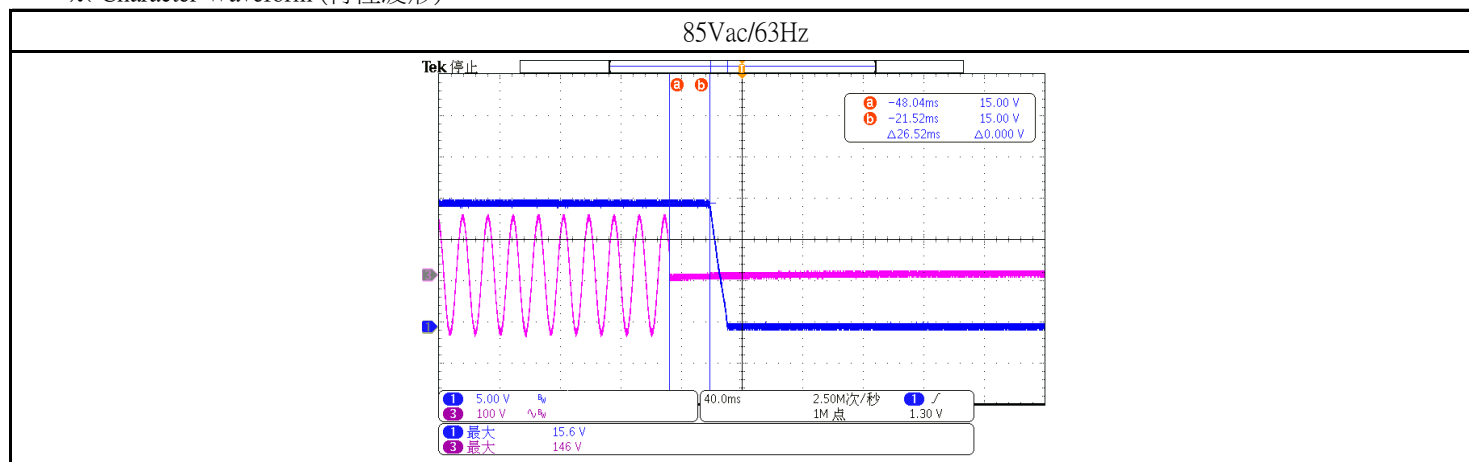

2-2. Low Vac Shut Off (輸入欠壓關斷特性)

※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	0~85Vac
2	I/P Frequency(Hz)(輸入頻率)	60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

LOW Vac SHUT OFF	
0~85Vac Input	
O/P	Full Load
Brown in	74.0V
85~0Vac Input	
O/P	Full Load
Brown out	73.0V

2-3. Over Shoot(過沖特性)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	85Vac/265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz /63Hz
3	Output Load(輸出負載)	No Load/Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

Over Shoot				
O/P	No Load		Full Load	
I/P	85Vac/63Hz	265Vac/47Hz	85Vac/63Hz	265Vac/47Hz
Character Result	15.5V	15.5V	15.4V	15.4V

※ Character Waveform (特性波形):

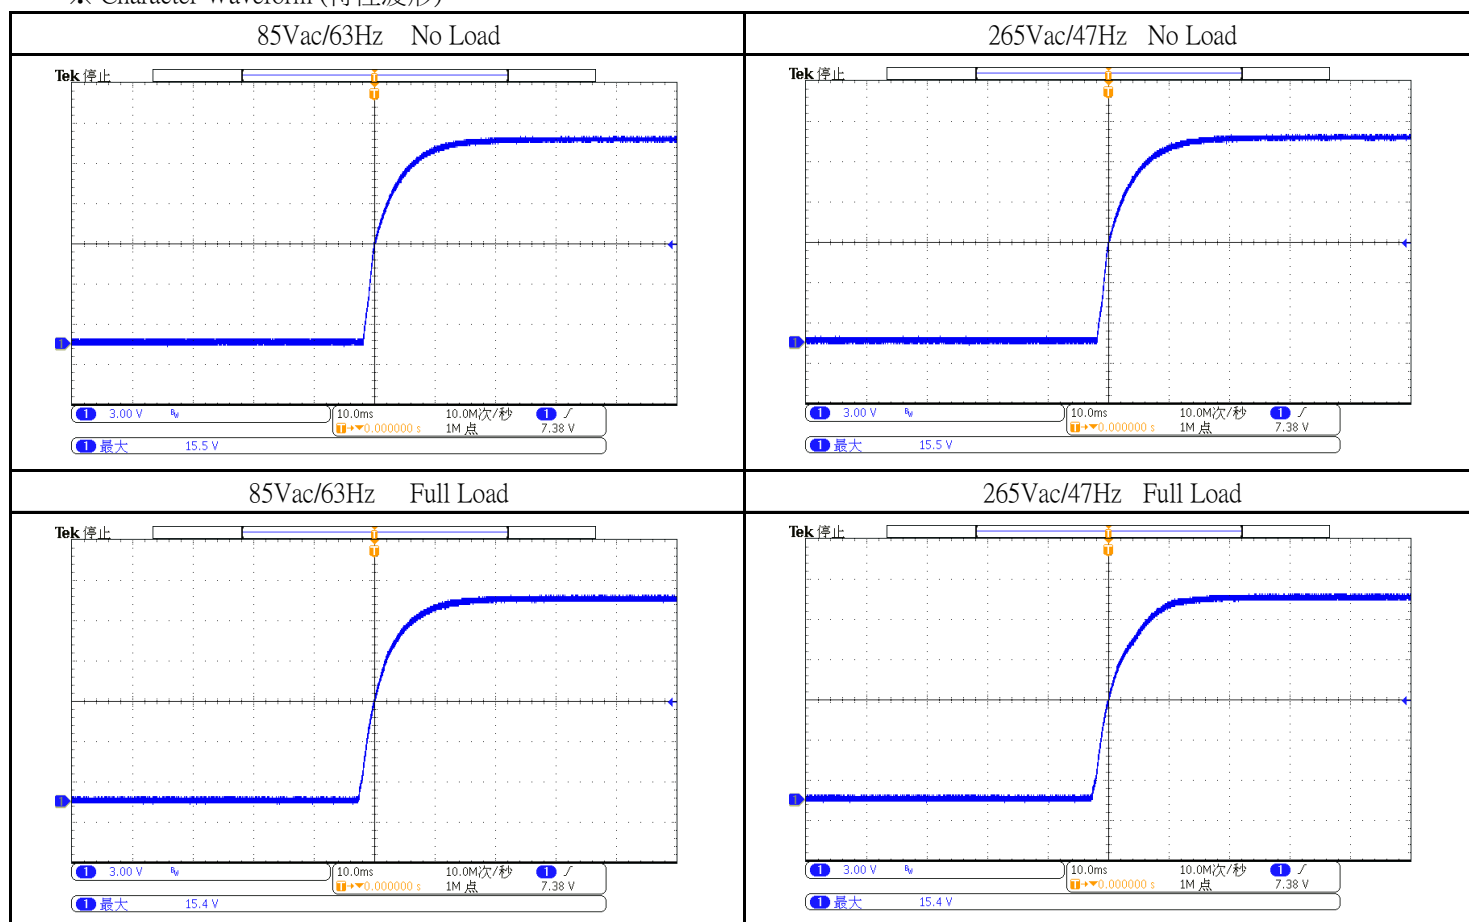

2-4.Under Shoot(下沖特性)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	85Vac/265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz /63Hz
3	Output Load(輸出負載)	Low/Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

Under Shoot				
O/P	0.1A		Full Load	
I/P	85Vac/63Hz	265Vac/47Hz	85Vac/63Hz	265Vac/47Hz
Character Result	15.5V	15.6V	15.4V	15.5V

※ Character Waveform (特性波形):

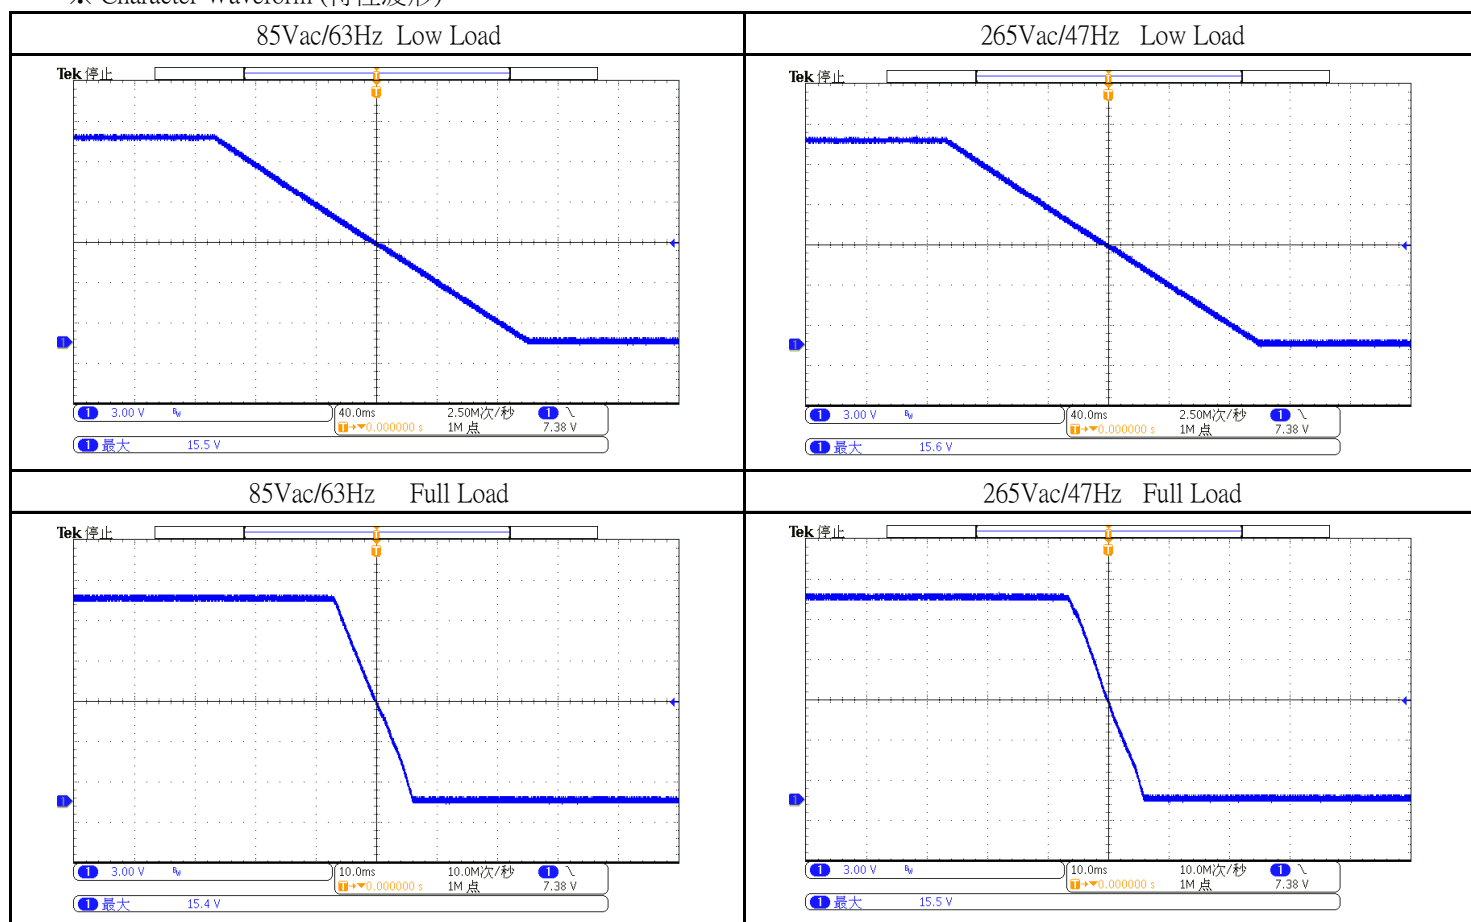

2-5.Leak Current(漏電流特性)

※Character Condition(特性條件) :

1	I/P Voltage(Vac)(輸入電壓)	265Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz
3	Output Load(輸出負載)	No Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS
6		

※Character Equipment(特性設備) :

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	Leak current Characterer(泄漏電流特性儀)	VG2301
2		
3		
4		

LEAK CURRENT CHARACTER

Spec.(mA MAX)	0.5
O/P	No Load
I/P	265Vac

※Character Data :

SINGLE-PHASE EQUIPMENT

The Character was made in all combinations to the normal and reverse polarity of the supply circuit(Polarity Switch P1)

Terminal A (Switch"s") of Measuring Instrument Connected to:	Switch"e" Position	Touch Current (mA r.m.s.)				
		Polarity P1/Primary Switch Condition				
		Normal/On	Normal/Off	Reverse/On	Reverse/Off	Judgement
Output	Closed	0.138	-	0.148	-	Pass

The touch current [did not] exceed _____ mA r.m.s with terminal A connected to the earth terminal of the unit with Switch "e" opened.

The touch current [did not] exceed 0.5 mA r.m.s with terminal A connected to the earth terminal of the unit with Switch "e" closed.