



Configuration used for determination 用於特性的配置

EMI 特性 Electro-Magnetic interference characteristics

(1)Conducted Emission

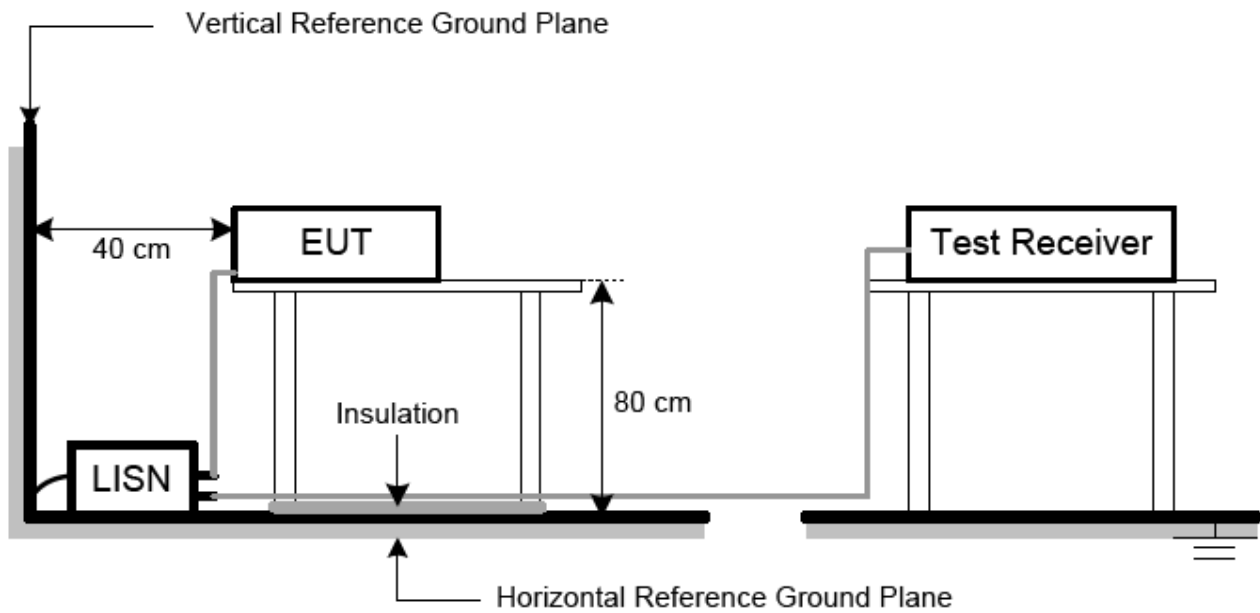

(2)Radiated Emission

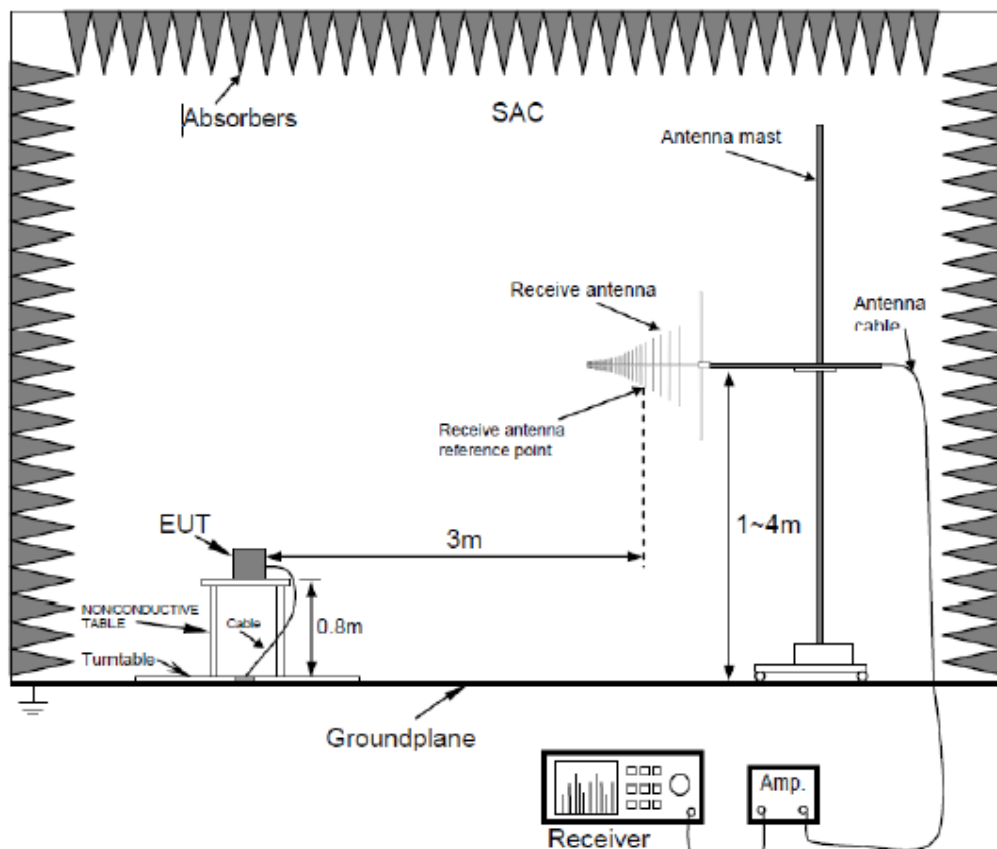

Conduction Character (傳導特性)

※Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	100Vac
2	I/P Frequency(Hz)(輸入頻率)	60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備):

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	KH3931
2	AC Source(變頻器)	ALL POWER/APG-1005N
3	Character Standard	EN55032 CLASS B

※Character Data(特性數據):

ITEM	QP	AV
L line	-14.2dB	-18.0dB
N line	-16.5dB	-19.1dB


※Character Waveform (特性波形):

EMI TEST REPORT

Organization: UNIFIVE Operator: YHH EUT: UNOPT3050-480011SA
Place: EMI Time: 2025/3/31/16:09 Test equipment: KH3931
Detector: PK+AV Test-time(ms): 30 SN: 310771
Limit: EN55032 Transducer(PK/AV): PK / AV JZ: 2,15,692
Remark: 100V L LOAD=1.1A(43.6R)

Start(MHz)	End(MHz)	Step(MHz)	freq, step
0.150	2.000	0.002	
2.000	10.000	0.010	
10.000	30.000	0.025	

dBuV scan result

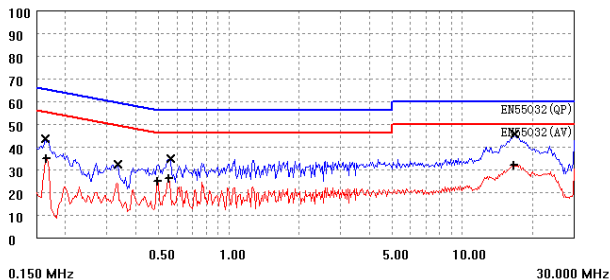

freq(MHz)	lev(dBuV)	Lim(dBuV)	Δ(lev-Lim)
0.164	43.5	65.3	-21.8
0.336	32.5	59.3	-26.8
0.562	34.9	56.0	-21.1
16.725	45.8	60.0	-14.2

final test


freq(MHz)	lev(dBuV)	Lim(dBuV)	Δ(lev-Lim)
0.166	34.7	55.2	-20.4
0.496	24.6	46.1	-21.5
0.554	25.8	46.0	-20.2
16.625	32.0	50.0	-18.0

EMI TEST REPORT

Organization: UNIFIVE Operator: YHH EUT: UNOPT3050-480011SA
Place: EMI Time: 2025/3/31/15:54 Test equipment: KH3931
Detector: PK+AV Test-time(ms): 30 SN: 310771
Limit: EN55032 Transducer(PK/AV): PK / AV JZ: 2,15,691
Remark: 100V N LOAD=1.1A(43.6R)

Start(MHz)	End(MHz)	Step(MHz)	freq, step
0.150	2.000	0.002	
2.000	10.000	0.010	
10.000	30.000	0.025	

dBuV scan result

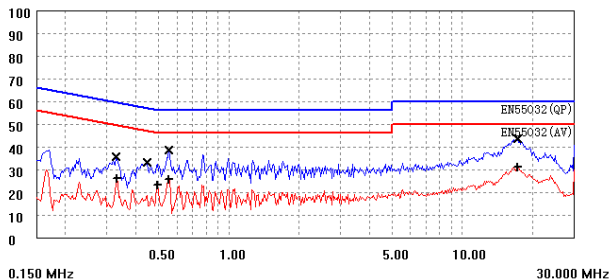

freq(MHz)	lev(dBuV)	Lim(dBuV)	Δ(lev-Lim)
0.330	35.5	59.5	-23.9
0.448	33.0	56.9	-23.9
0.556	38.4	56.0	-17.6
17.325	43.5	60.0	-16.5

final test

freq(MHz)	lev(dBuV)	Lim(dBuV)	Δ(lev-Lim)
0.332	26.2	49.4	-23.2
0.494	23.1	46.1	-23.0
0.556	25.6	46.0	-20.4
17.300	30.9	50.0	-19.1

Conduction Character (傳導特性)

※Character Condition(特性條件)：

1	I/P Voltage(Vac)(輸入電壓)	230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS


※Character Equipment(特性設備)：

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	KH3931
2	AC Source(變頻器)	ALL POWER/APG-1005N
3	Character Standard	EN55032 CLASS B

※Character Data(特性數據)：

ITEM	QP	AV
L line	-11.5dB	-9.5dB
N line	-9.8dB	-8.5dB

※Character Waveform (特性波形)：

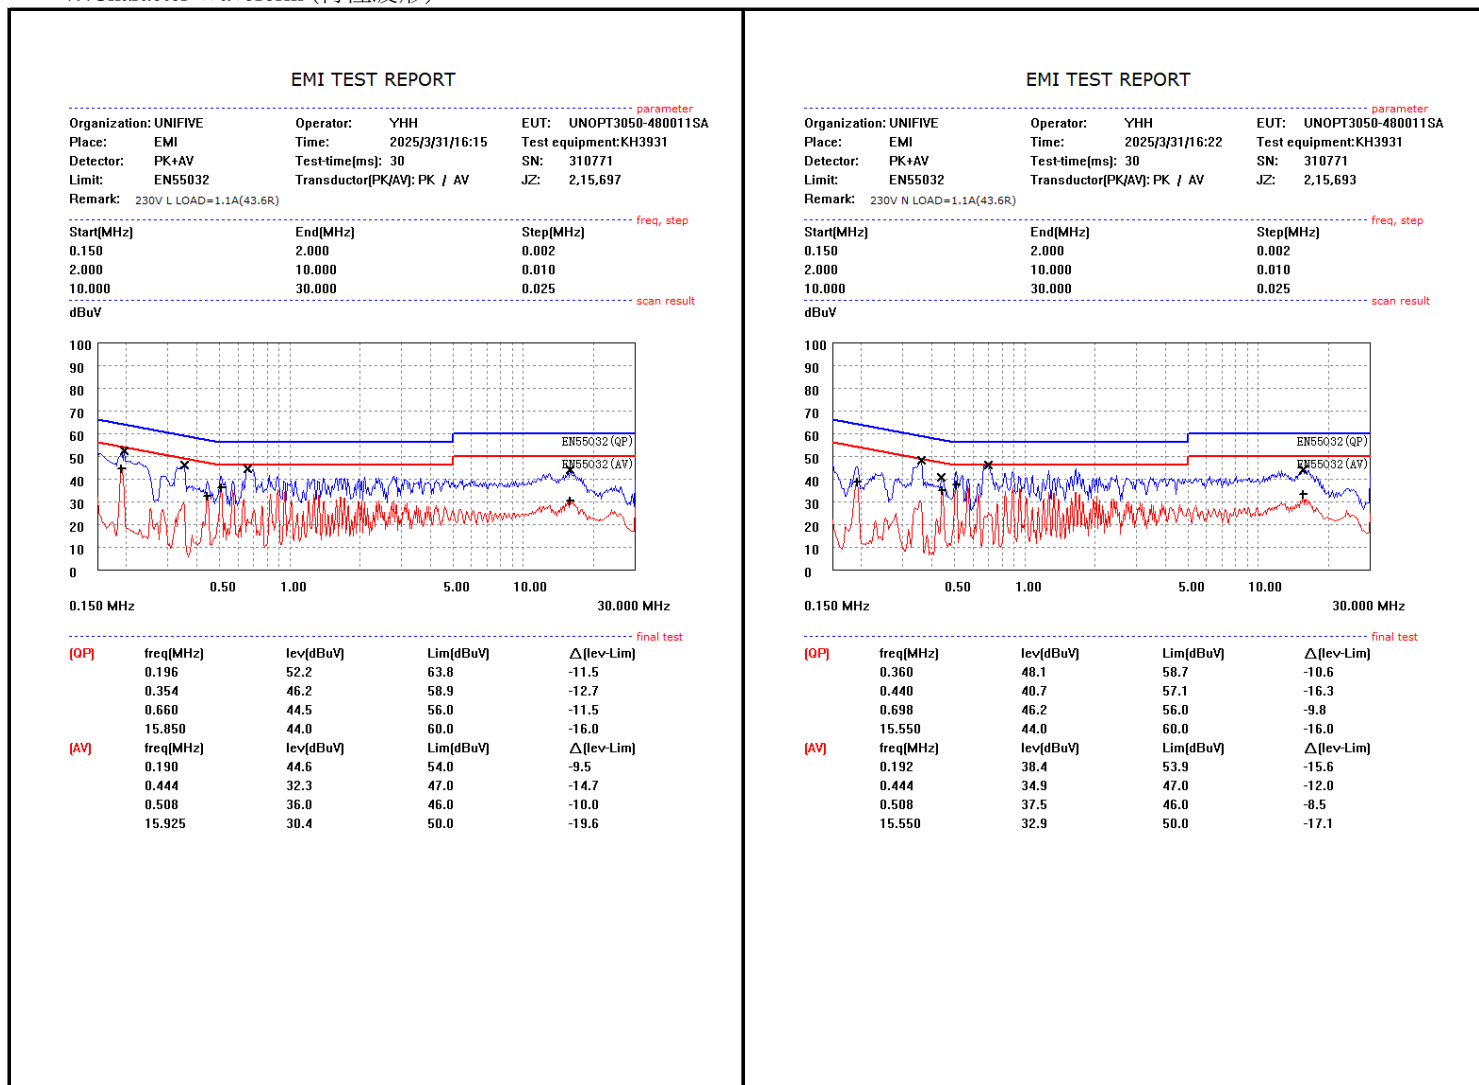

Radiation Character (輻射特性)

※Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	100Vac
2	I/P Frequency(Hz)(輸入頻率)	60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS


※Character Equipment(特性設備):

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	外面實驗室
2	AC Source(變頻器)	外面實驗室
3	Character Standard	CISPR32 CLASS B

※Character Data(特性數據):

ITEM	peak	QP
Character Result	V line	-4.54dB
	H line	-5.13dB

※Character Waveform (特性波形):

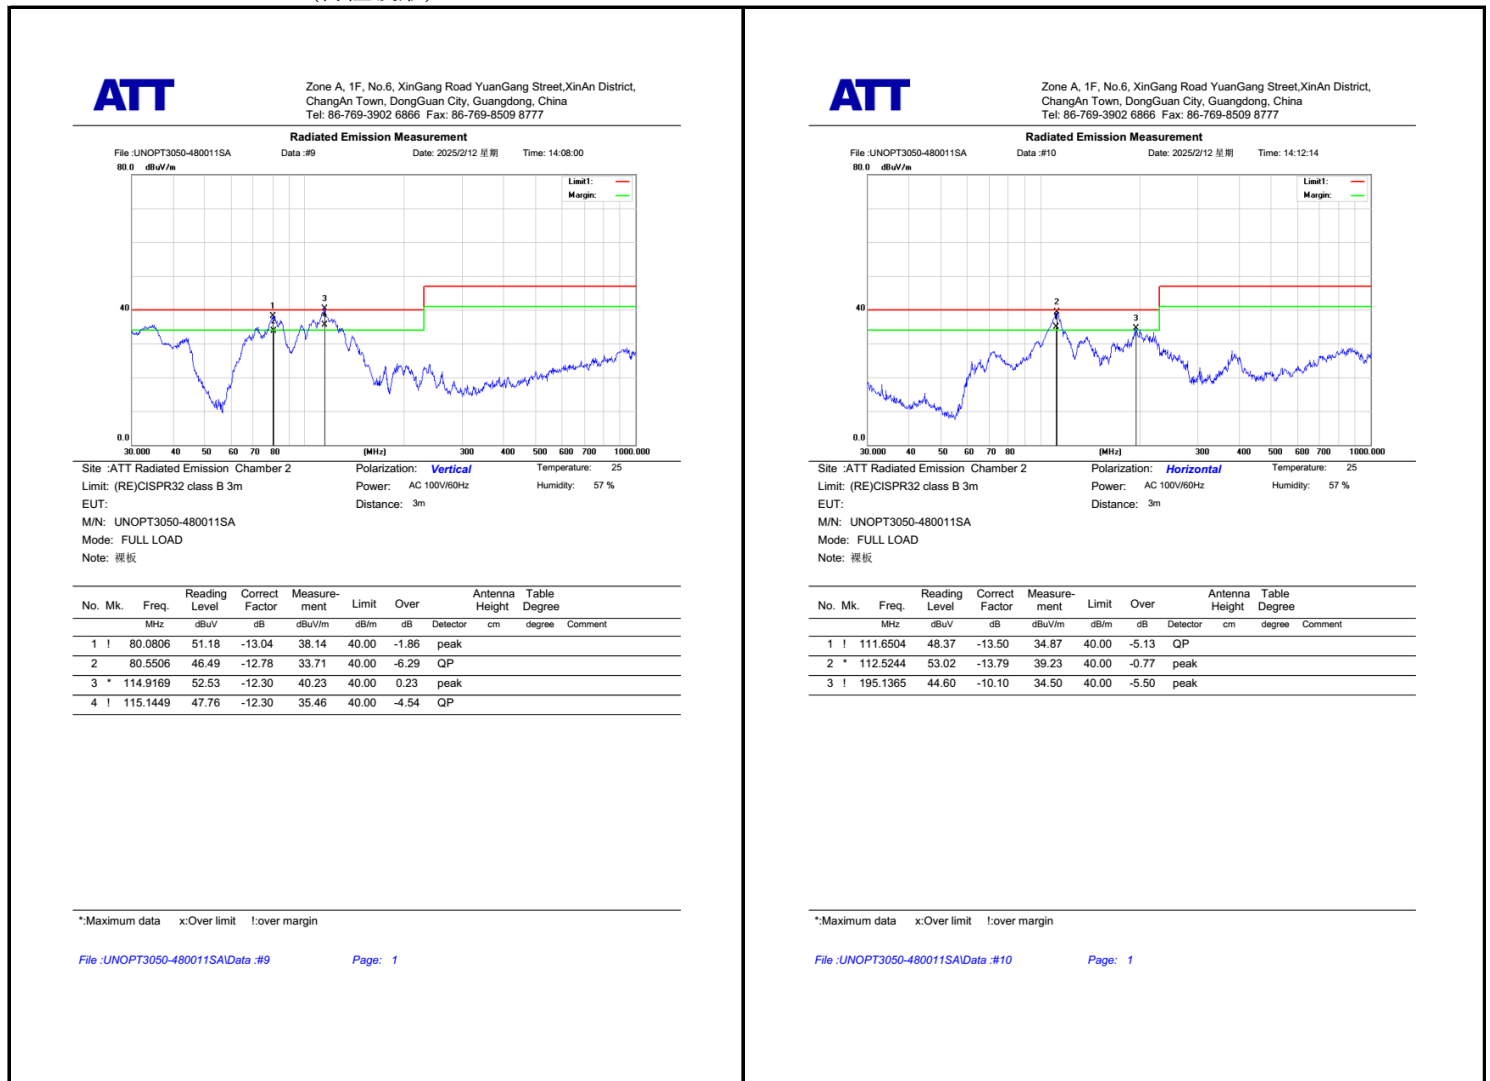

Radiation Character (輻射特性)

※Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS


※Character Equipment(特性設備):

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	外面實驗室
2	AC Source(變頻器)	外面實驗室
3	Character Standard	CISPR32 CLASS B

※Character Data(特性數據):

ITEM	peak	QP
Character Result	V line	-4.22dB
	H line	-5.36dB

※Character Waveform (特性波形):

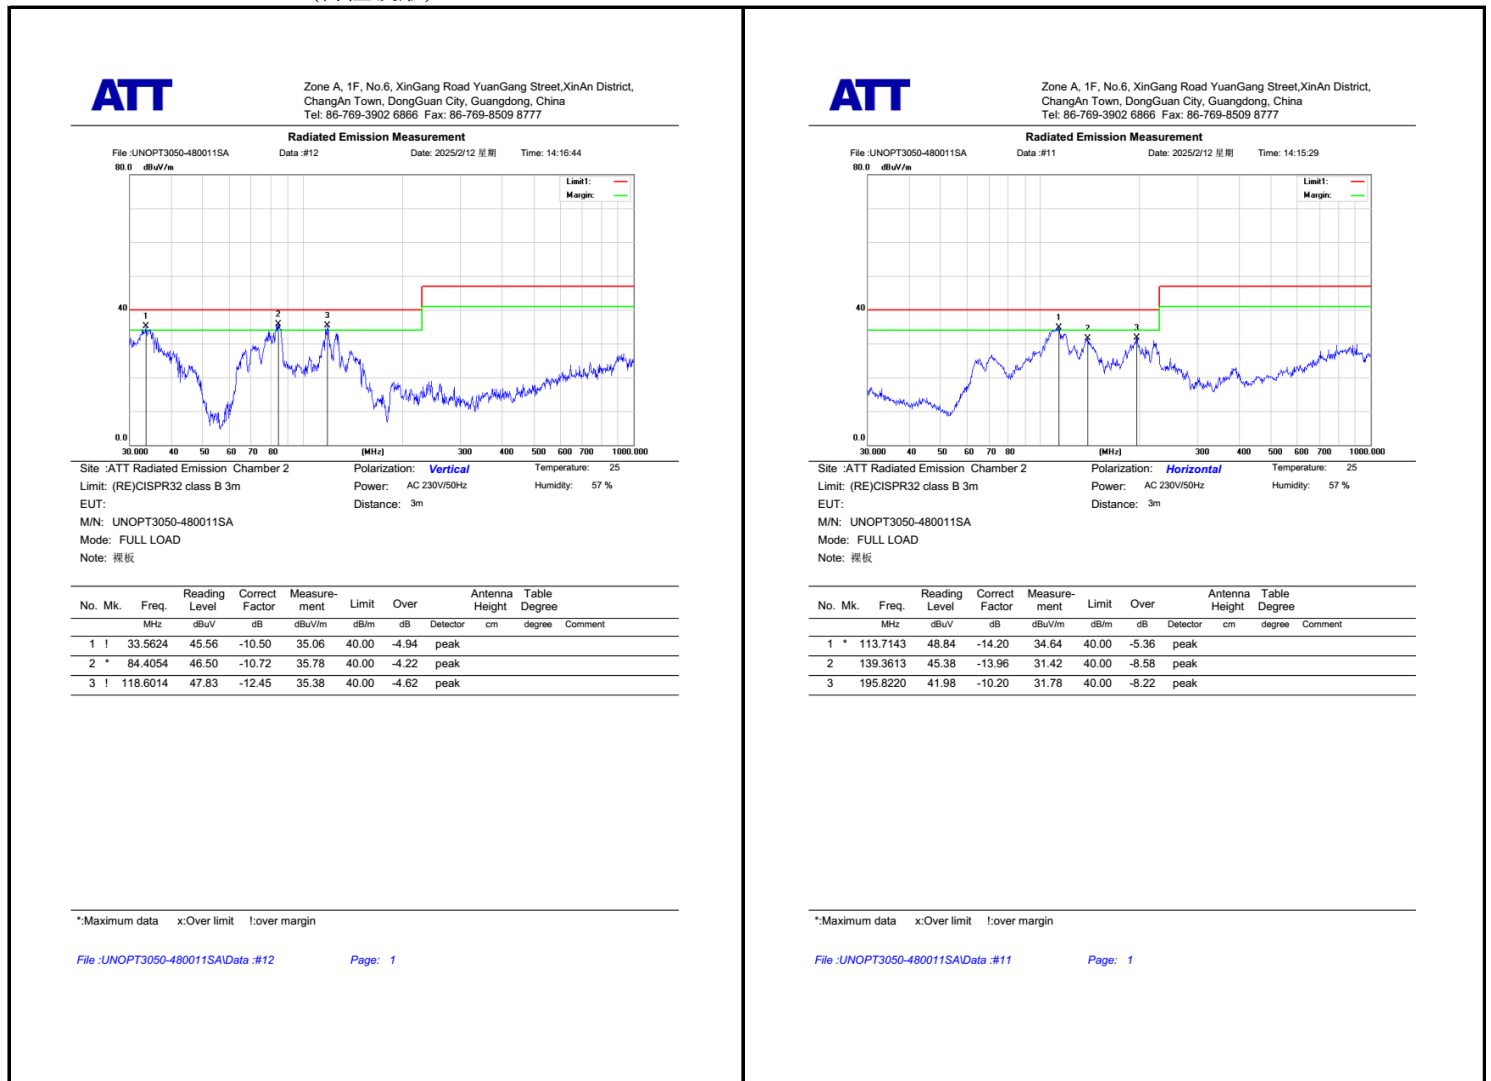

EFT Character (電子脈衝群干擾特性)

※Character Condition(特性條件) :

1	I/P Voltage(Vac)(輸入電壓)	100Vac/230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz / 60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備) :

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	BEST EMC SOLUTION	EMCSOSIN / EFT-S4
2	AC Source(變頻器)	ALL POWER/APG-1005N

※Character Standard(特性標準) :

1	Character Standard	IEC 61000-4-4
EFT Character		
	Spec.	1KV
	O/P	Full Load
	I/P	100Vac/60Hz & 230Vac/50Hz
	Burst	15ms/300ms
	Character Duration	1 min
	Pulse Rate:	5KHz/100KHz

※Character Data(特性數據) 產品類別: Class I

Power Line	Pulse Polarity	Character Voltage	Required Criteria	Complied To Criteria(A,B,C)	Judgement
L	"+" / "-"	1KV	Criteria B	Criteria A	PASS
N	"+" / "-"	1KV	Criteria B	Criteria A	PASS
L-N	"+" / "-"	1KV	Criteria B	Criteria A	PASS
PE	"+" / "-"	1KV	Criteria B	Criteria A	PASS
L-PE	"+" / "-"	1KV	Criteria B	Criteria A	PASS
N-PE	"+" / "-"	1KV	Criteria B	Criteria A	PASS
L-N-PE	"+" / "-"	1KV	Criteria B	Criteria A	PASS

※Character Performance & Result :

- ☒ Criteria A: The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- ☐ Criteria B: The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- ☐ Criteria C: Temporary loss of function is allowed, provided the function self recoverable or can be restored by the operation of controls

ESD Character (靜電干擾特性)

※Character Condition(特性條件) :

1	I/P Voltage(Vac)(輸入電壓)	100Vac/230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz / 60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備) :

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	EMC-PARTNER	PRIMA /ESD61002TB
2	AC Source(變頻器)	ALL POWER/APG-1005N

※Character Standard(特性標準) :

1	Character Standard	IEC 61000-4-2:2001
ESD Character		
Spec.	Air: $\pm 8.0KV$	Contact: $\pm 4.0KV$
O/P	Full Load	
I/P	100Vac/60Hz & 230Vac/50Hz	
Description of Observation:	NO Abnormal Issue	
Performance Criterion:	Manufacturer (According to Standard/Manufacturer)	

※Character Data(特性數據) :

Item	Amount of Discharge	Voltage	Required Criteria	Complied To Criteria(A,B,C)	Judgement
Air Discharge	Mini 10/Point	$\pm 8.0KV$	Criteria B	Criteria A	PASS
Contact Discharge	Mini 25/Point	$\pm 4.0KV$	Criteria B	Criteria A	PASS
Indirect Discharge(HCP)	Mini 25/Point	$\pm 4.0KV$	Criteria B	Criteria A	PASS
Indirect Discharge(VCP Front)	Mini 25/Point	$\pm 4.0KV$	Criteria B	Criteria A	PASS
Indirect Discharge(VCP Left)	Mini 25/Point	$\pm 4.0KV$	Criteria B	Criteria A	PASS
Indirect Discharge(VCP Back)	Mini 25/Point	$\pm 4.0KV$	Criteria B	Criteria A	PASS
Indirect Discharge(VCP Right)	Mini 25/Point	$\pm 4.0KV$	Criteria B	Criteria A	PASS

※Character Performance & Result :

- ☒ Criteria A: The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- ☐ Criteria B: The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- ☐ Criteria C: Temporary loss of function is allowed, provided the function self recoverable or can be restored by the operation of controls

Light Surge Character (雷擊特性)

※Character Condition(特性條件)：

1	I/P Voltage(Vac)(輸入電壓)	100Vac/230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz / 60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備)：

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	EMC-PARTNER	Prima/ SUG61005TAX
2	AC Source(變頻器)	ALL POWER/APG-1005N

※Character Standard(特性標準)：

1	Character Standard	IEC 61000-4-5:1995+ A1:2001
SURGE Character		
Spec.	Line to Line $\pm 1KV$; Line to FG $\pm 2KV$	
O/P	Full load	
I/P	100Vac/60Hz & 230Vac/50Hz	
REP.RATE	60 sec	
Description of Observation:	NO Abnormal Issue	
Performance Criterion:	Manufacturer (According to Standard/Manufacturer)	

※Character Data(特性數據) 產品類別: Class I

Character Point	Character Voltage	Polarity	Phase Angle				Required Criteria	Complied To Criteria(A,B,C)	Judgement
			0°	90°	180°	270°			
L-N	1KV	+	OK	OK	OK	OK	Criteria B	Criteria A	PASS
		-	OK	OK	OK	OK	Criteria B	Criteria A	PASS
L-GND	2KV	+	OK	OK	OK	OK	Criteria B	Criteria A	PASS
		-	OK	OK	OK	OK	Criteria B	Criteria A	PASS
N-GND	2KV	+	OK	OK	OK	OK	Criteria B	Criteria A	PASS
		-	OK	OK	OK	OK	Criteria B	Criteria A	PASS
L,N-GND	2KV	+	OK	OK	OK	OK	Criteria B	Criteria A	PASS
		-	OK	OK	OK	OK	Criteria B	Criteria A	PASS

Class II Type : Character L-N Only.

※Character Performance & Result：

- ☒ Criteria A: The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- ☐ Criteria B: The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- ☐ Criteria C: Temporary loss of function is allowed, provided the function self recoverable or can be restored by the operation of controls

DIPS Character(周波跌落特性)

※Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	100~230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz/60Hz
3	Output load(輸出負載)	Full load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS
6		

※Character Parameters(特性參數):

DIPS Character	
Condition :	According EN61000-4-11 (full load and high line)
	Voltage Dips 100% Redaction 10ms/20ms ; 60% Redaction 200ms/240ms ; 30 % Redaction 500 ms/600ms Voltage Interruption : ≥95% ; Redaction 5000ms/6000ms

※Character Data(特性數據):

Character Level	% UT	Reduction (%)	Duration (Periods)	Perform Criteria	Results	Judgement
0		100	0.5/1	B	Criteria A	PASS
40		60	10/12	C	Criteria B	PASS
70		30	25/30	C	Criteria A	PASS
0		100	250/300	C	Criteria B	PASS

※Character Performance & Result :

Criteria A: The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.

Criteria B: The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.

Criteria C: Temporary loss of function is allowed, provided the function self recoverable or can be restored by the operation of controls

Radiated Radio-Frequency Electromagnetic Field Immunity Character (IEC61000-4-3) (RS特性)

※Character Condition(特性條件)：

1	I/P Voltage(Vac)(輸入電壓)	230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備)：

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	廠外部實驗室
2	AC Source(變頻器)	廠外部實驗室

※Character Standard(特性標準)：

RS TEST DATA						
Freq.Range(MHz)	RF Field Position	R.F. Field Strength	Azimuth	Perform Criteria	Results	Judgment
80MHz-1000MHz	Vertical/Horizontal	1V(rms) AM Modulated 1000Hz, 80%	Front	A	A	PASS
			Back			
			Left			
			Right			

Conducted Disturbances Induced by Radio-Frequency Field Immunity Character (IEC61000-4-6) (CS特性)

※Character Condition(特性條件)：

1	I/P Voltage(Vac)(輸入電壓)	230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備)：

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	廠外部實驗室
2	AC Source(變頻器)	廠外部實驗室

※Character Standard(特性標準)：

CS TEST DATA					
Test Ports (Mode)	Freq.Range(MHz)	Field Strength	Perform Criteria	Results	Judgment
Input/Output AC. Power Port	0.15-80MHz	3V(rms) AM Modulated 1000Hz, 80%	A	A	PASS

Power Frequency Magnetic Field Immunity Character (IEC61000-4-8) (PFMF特性)

※Character Condition(特性條件)：

1	I/P Voltage(Vac)(輸入電壓)	230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz/ 60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備)：

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	廠外部實驗室
2	AC Source(變頻器)	廠外部實驗室

※Character Standard(特性標準)：

Magnetic Field Immunity					
Test Ports (Mode)	Frequency(Hz)	Field Strength	Perform Criteria	Results	Judgment
X Orientation	50/60	3A/m	A	A	PASS
Y Orientation			A	A	PASS
Z Orientation			A	A	PASS