

UMDN 12W Series

Medical AC/DC Adaptor Standard Product



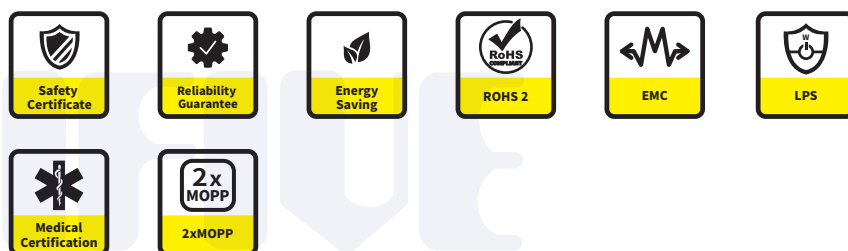
▲ UMDNI3012



▲ UMDNB3012



■ Please contact our sales department for safety standard of each model.



Product Highlights

- Stability
- Energy and High Efficiency
- 2xMOPP
- Suitable for medical equipment

Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection

Safety Standard

- 60601-1
- PSE 別表第八

Efficiency

- Energy Efficiency Level VI (ErP / DoE)
- Meet Commission Regulation(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

Emissions

- FCC
 - FCC Part18-B
- CE
 - EN(CISPR)55011-B
- VCCI-B
- BS EN55011

Immunity

- EN60601-1-2
 - BS EN60601-1-2
- The above specifications include the following test standards
- ✓ EN61000-4-2
 - ✓ EN61000-4-3
 - ✓ EN61000-4-4
 - ✓ EN61000-4-5
 - ✓ EN61000-4-6
 - ✓ EN61000-4-8
 - ✓ EN61000-4-11

Electrical Spec

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection, Sea Level
Storage Temperature	-20	-	65	°C	Free Convection, Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing

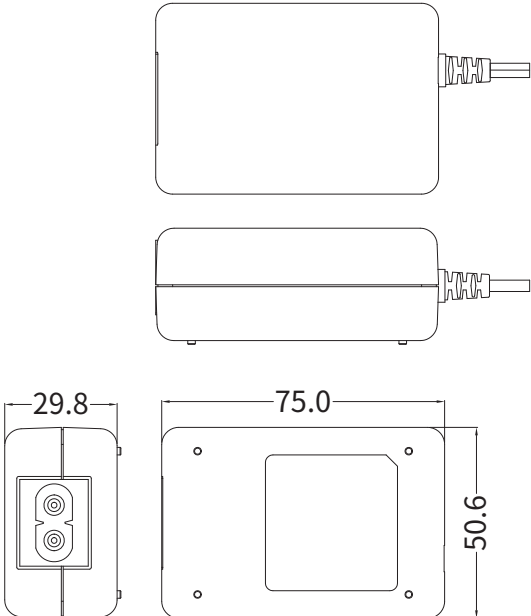
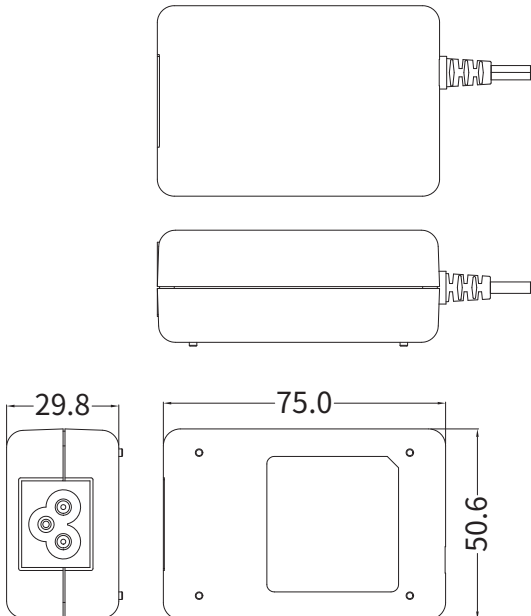
Typical model list

Model Name	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	No-load power consumption	Option / Remark
UMDNx3012-050020SA	5.0V	2.0A	±5%	150mV	150mV	78.70%	0.1W	
UMDNx3012-059020SA	5.9V	2.0A	±5%	150mV	150mV	79.83%	0.1W	
UMDNx3012-090013SA	9.0V	1.34A	±5%	180mV	180mV	82.99%	0.1W	
UMDNx3012-120010SA	12.0V	1.0A	±5%	180mV	180mV	82.96%	0.1W	
UMDNx3012-150800SA	15.0V	0.8A	±5%	180mV	180mV	82.96%	0.1W	
UMDNx3012-180600SA	18.0V	0.6A	±5%	180mV	180mV	82.38%	0.1W	
UMDNx3012-180670SA	18.0V	0.67A	±5%	240mV	240mV	82.99%	0.1W	
UMDNx3012-240500SA	24.0V	0.5A	±5%	240mV	240mV	82.96%	0.1W	

■ Measurement Condition

- Measurements shall be made with an oscilloscope with 20MHz bandwidth.
- Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF Low ESR electrolytic capacitor to simulate system loading.

Mechanical Spec

UMDNI3012 Series	UMDNB3012 Series
	

■ Please contact our sales department for details of each model ■