

# UMVBxN 10W Series

## Medical AC/DC Adaptor USB/USB PD USB-A/GaN Mosfet Technology



▲ UMVBUN3010



▲ UMVBEN3010



▲ UMVBAN3010




▲ UMVBKN3010



▲ UMVBZN3010



■ Please contact our sales department for safety standard of each model.



## Product Highlights

- Stability
- Energy and High Efficiency
- Small size
- Mobility
- 2xMOPP
- Suitable for medical equipment

## Efficiency

- Energy Efficiency Level VI ( ErP / DoE )
- Meet Commission Regulation(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430
- Meet DOE VII Draft

## Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection

## Emissions

- FCC
  - FCC Part18-B
- CE
  - EN(CISPR)55011-B
- VCCI-B
- BS EN55011

## Safety Standard

- 60601-1
- PSE 別表第八

## Immunity

- EN60601-1-2
- BS EN60601-1-2

The above specifications include the following test standards

- ✓ EN61000-4-2
- ✓ EN61000-4-3
- ✓ EN61000-4-4
- ✓ EN61000-4-5
- ✓ EN61000-4-6
- ✓ EN61000-4-8
- ✓ EN61000-4-11

## Electrical Spec

| Input       |      |         |      |       |         |
|-------------|------|---------|------|-------|---------|
| Description | Min. | Typ.    | Max. | Units | Comment |
| Voltage     | 90   | 100~240 | 264  | Vac   |         |
| Frequency   | 47   | 50/60   | 63   | Hz    |         |

| Environmental         |      |      |      |       |                           |
|-----------------------|------|------|------|-------|---------------------------|
| Description           | Min. | Typ. | Max. | Units | Comment                   |
| Operating Temperature | 0    | -    | 40   | °C    | Free Convection,Sea Level |
| Storage Temperature   | -20  | -    | 65   | °C    | Free Convection,Sea Level |
| Operating Humidity    | 5    | -    | 95   | %RH   | No Condensing             |
| Storage Humidity      | 5    | -    | 95   | %RH   | No Condensing             |

## Typical model list

| Output Condition | Model Name         | DC Output Voltage | DC Output Current | Output Voltage Precision | Ripple | Noise | Average Active Efficiency | No-Load Power Consumption | Option / Remark |
|------------------|--------------------|-------------------|-------------------|--------------------------|--------|-------|---------------------------|---------------------------|-----------------|
| USB-A            | UMVBxN3010-050015S | 5.0V              | 1.5A              | ±5%                      | 150mV  | 150mV | 76.65%                    | 0.1W                      |                 |
|                  | UMVBxN3010-050020S | 5.0V              | 2.0A              | ±5%                      | 120mV  | 120mV | 78.70%                    | 0.1W                      |                 |

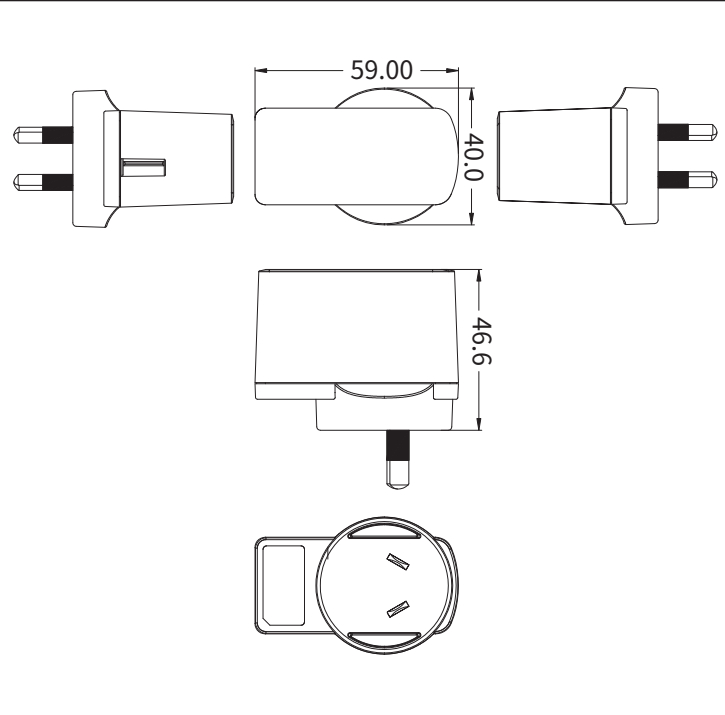
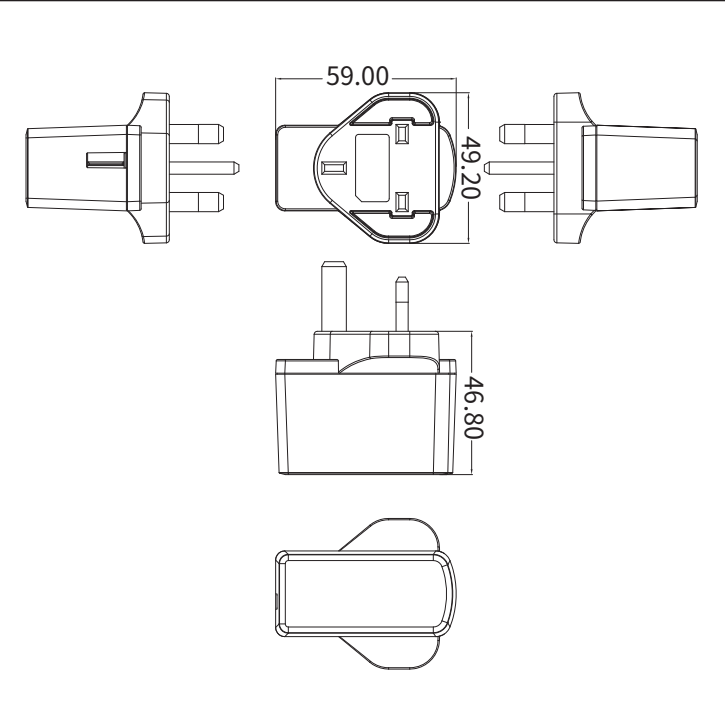
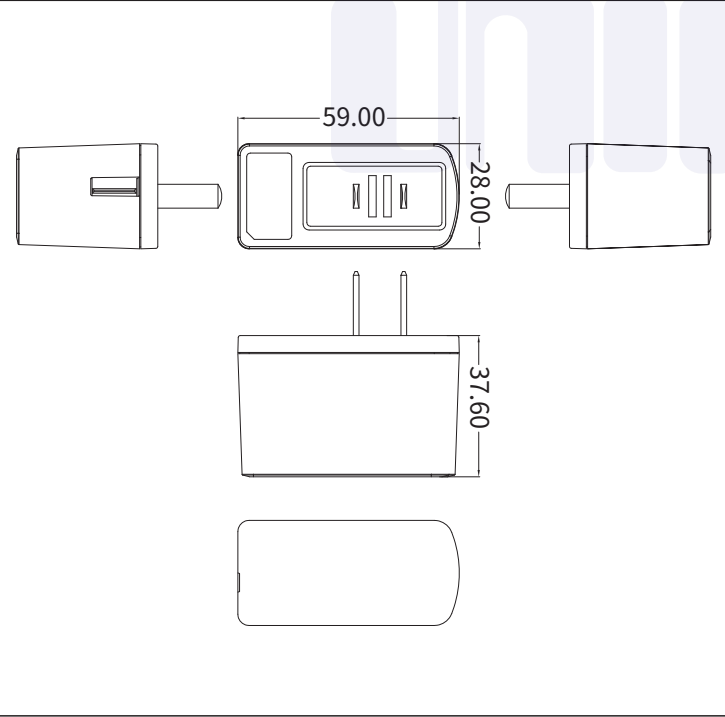
■ Measurement Condition

- Measurements shall be made with an oscilloscope with 20MHz bandwidth.
- Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF Low ESR electrolytic capacitor to simulate system loading.

## Mechanical Spec

| UMVBUN3010 Series | UMVBEN3010 Series |
|-------------------|-------------------|
|                   |                   |

Mechanical Spec

| UMVBAN3010 Series                                                                  | UMVBKN3010 Series                                                                  |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|    |  |
| UMVBZN3010 Series                                                                  |                                                                                    |
|  |                                                                                    |

the following blank

■ Please contact our sales department for details of each model ■