

# UNDE 120W Series

## I.C.T./AV AC/DC Adaptor **Standard Product**





UNDEC3120

UNDET3120











Please contact our sales department for safety standard













### **Product Highlights**

- Stability
- Energy and High Efficiency
- Suitable for audio, video, information and communications technology equipment

## Efficiency

- Energy Efficiency Level VI (ErP / DoE)
- Meet Commission Regulation(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

#### Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection
- Over Temperature Protection (Optional)

## Safety Standrd

- **60950-1**
- **62368-1**
- PSE 別表第八

#### **Emissions**

- FCC
  - ■FCC Part15-B
- - ■EN(CISPR)55032-B
- VCCI-B
- BS EN 55032

#### **Immunity**

- EN55035
- BS EN 55035

The above specifications include the following test standards

- ✓ EN61000-4-2
- ✓ EN61000-4-3
- ✓ EN61000-4-4
- ✓ EN61000-4-5
- ✓ EN61000-4-6
- ✓ EN61000-4-8
- ✓ EN61000-4-11



## **Electrical Spec**

Input								
Description		Min.	Тур.	Max.	Units	Comment		
Voltage		90	100~240	264	Vac			
Frequency		47	50/60	63	Hz			
Power Factor	ACIN 100V	0.9	-	-	-			
	ACIN 230V	0.9	-	-	-			


Environmental								
Description	Min.	Тур.	Max.	Units	Comment			
Operating Temperature	0	-	40	°C	Free Convection, Sea Level			
Storage Temperature	-20	-	65	°C	Free Convection,Sea Level			
Operating Humidity	5	-	95	%RH	No Condensing			
Storage Humidity	5	-	95	%RH	No Condensing			

## Typical model list

Model Name	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	No-Load Power Consumption	Option / Remark
UNDEx3120-120100SA	12.0V	10.0A	±5%	240mV	480mV	88.0%	0.21W	
UNDEx3120-150080SA	15.0V	8.0A	±5%	240mV	480mV	88.0%	0.21W	
UNDEx3120-190063SA	19.0V	6.3A	±5%	240mV	480mV	88.0%	0.21W	
UNDEx3120-240050SA	24.0V	5.0A	±5%	240mV	480mV	88.0%	0.21W	

Measurement Condition

## Mechanical Spec

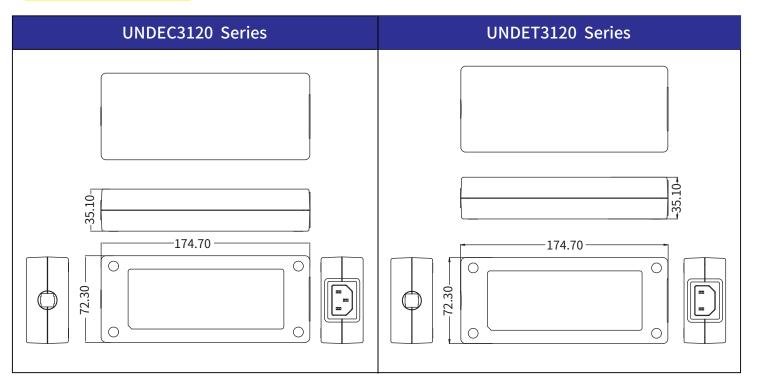

Please contact our sales department for details of each model

<sup>1.</sup> Measurements shall be made with an oscilloscope with 20MHz bandwidth.

<sup>2.</sup> Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF Low ESR electrolytic capacitor to simulate system loading.