

SN 45W Series

I.C.T./AV AC/DC Adaptor Wide Ambient Temperature




▲ SNI360



▲ SNB360



▲ SNC360

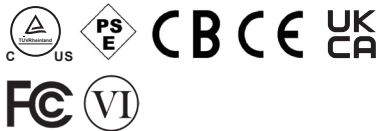

■ All safety meets 40 degree standard.
■ Please contact our sales department for safety standard of each model.



Safety Certificate



Reliability Guarantee



Energy Saving



ROHS 2



EMC



LPS

Product Highlights

- -20°C~60°C
Operating Temperature
- Stability
- Energy and High Efficiency
- Applicable to use in harsh environments.
- Suitable for IoT, AIoT/automation equipment/ASRS
- Support wide range of temperature environments.

Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection

Safety Standard

- 60950-1
- 62368-1
- PSE 別表第八

Efficiency

- Energy Efficiency Level VI (ErP / DoE)
- Meet Commission Regulation(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

Emissions

- FCC
 - FCC Part15-B
- CE
 - EN(CISPR)55032-B
- VCCI-B
- BS EN 55032

Immunity

- EN55035
 - BS EN 55035
- The above specifications include the following test standards
- ✓ EN61000-4-2
 - ✓ EN61000-4-3
 - ✓ EN61000-4-4
 - ✓ EN61000-4-5
 - ✓ EN61000-4-6
 - ✓ EN61000-4-8
 - ✓ EN61000-4-11

Electrical Spec

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature for 60W	0	-	40	°C	Free Convection,Sea Level
Operating Temperature for 45W	-20	-	60	°C	Free Convection,Sea Level
Storage Temperature	-20	-	65	°C	Free Convection,Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing

Typical model list

Model Name		DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	No-Load Power Consumption	Option/Remark
1	SNx360-1240	12.0V	3.0A	±5%	300mV	300mV	87.40%	0.1W	-20°C~60°C
		12.0V	4.0A	±5%	300mV	300mV	87.77%	0.1W	0°C~40°C
2	SNx360-1242	12.0V	3.2A	±5%	300mV	300mV	87.52%	0.21W	-20°C~60°C
		12.0V	4.2A	±5%	300mV	300mV	88.00%	0.21W	0°C~40°C
3	SNx360-1250	12.0V	3.8A	±5%	360mV	480mV	87.74%	0.21W	-20°C~60°C
		12.0V	5.0A	±5%	360mV	480mV	88.00%	0.21W	0°C~40°C
4	SNx360-1540	15.0V	3.0A	±5%	300mV	300mV	87.73%	0.21W	-20°C~60°C
		15.0V	4.0A	±5%	300mV	300mV	88.00%	0.21W	0°C~40°C
5	SNx360-1637	16.0V	2.8A	±5%	300mV	300mV	87.72%	0.21W	-20°C~60°C
		16.0V	3.75A	±5%	300mV	300mV	88.00%	0.21W	0°C~40°C
6	SNx360-1833	18.0V	2.5A	±5%	360mV	480mV	87.72%	0.21W	-20°C~60°C
		18.0V	3.33A	±5%	360mV	480mV	88.00%	0.21W	0°C~40°C
7	SNx360-2425	24.0V	1.9A	±5%	240mV	480mV	87.74%	0.21W	-20°C~60°C
		24.0V	2.5A	±5%	240mV	480mV	88.00%	0.21W	0°C~40°C
8	SNx360-4812	48.0V	0.93A	±5%	240mV	480mV	87.72%	0.21W	-20°C~60°C
		48.0V	1.25A	±5%	240mV	480mV	88.00%	0.21W	0°C~40°C

■ Remarks : SNx (x=I, B or C)

■ Measurement condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.

2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

■ Precaution The different output current is applied to the different operating temperature. For example, 12.0V/3.0A is for -20°C to 60°C and 12.0V/4.0A is for 0°C to 40°C. For the applicable safety standards, see the specification sheef.

3. Safety certificates were available for the model with 0~40 degrees operation.

No certificates for the model which operating under -20~60 degrees,but the design can meet safety standard.

more detail on next page

Mechanical Spec

SNI360 Series	SNB360 Series	SNC360 Series



the following blank

■ Please contact our sales department for details of each model ■