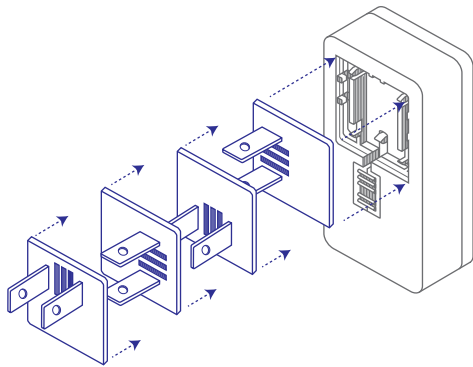



UBX 5W Series

UNIFIVE
2022.06.06 V2

USB AC/DC Adaptor USB-A



▲ UUAL



▲ UUAZ



▲ UUAE



▲ UUAR



▲ UUAK



▲ UUAA



▲ UBX305



■ Please contact our sales department for safety standard of each model.



Interchange-able Pin



Charging



Product Highlights

- Stability
- Ultra Small Size
- Light Weight
- Energy Efficiency
- Suit MP3 Player, Mobile Phone, Portable GPS Device, PDA

Efficiency

- Energy Efficiency Level VI(ErP/DoE)
- Meet COMMISSION REGULATION(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection

Emissions

- FCC Part15 Class B
- CE CISPR 32 EN55032
- VCCI Class B
- CNS13438
- GB9254/GB17625.1
- KN32 KN35
- AS/NZS CISPR32
- BS EN 55032

Safety Standard

- 60950-1
- 62368-1
- GB4943.1
- CNS14336
- PSE 別表第八

Immunity

- EN 55035
- BS EN 55035

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection,Sea Level
Storage Temperature	-20	-	65	°C	Free Convection,Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing

Typical model list

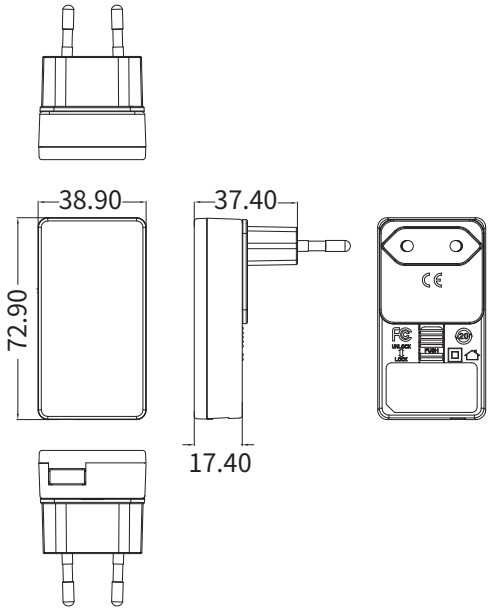
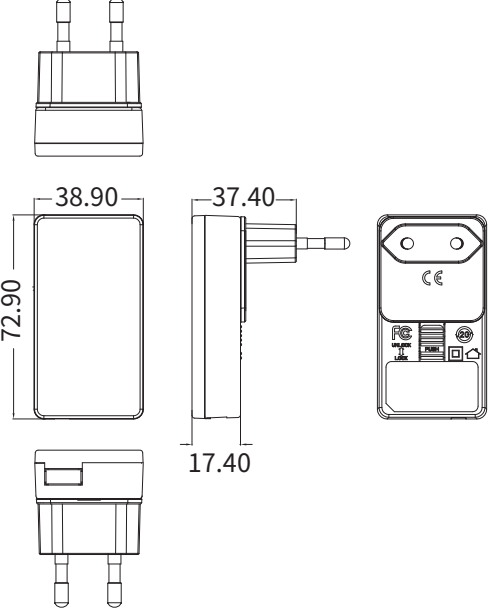
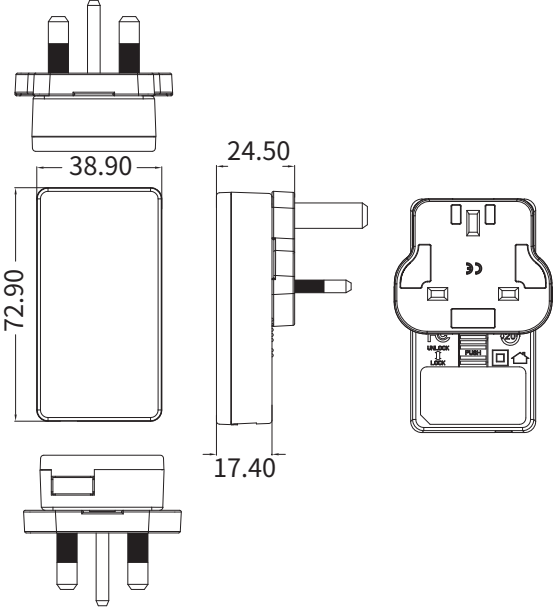
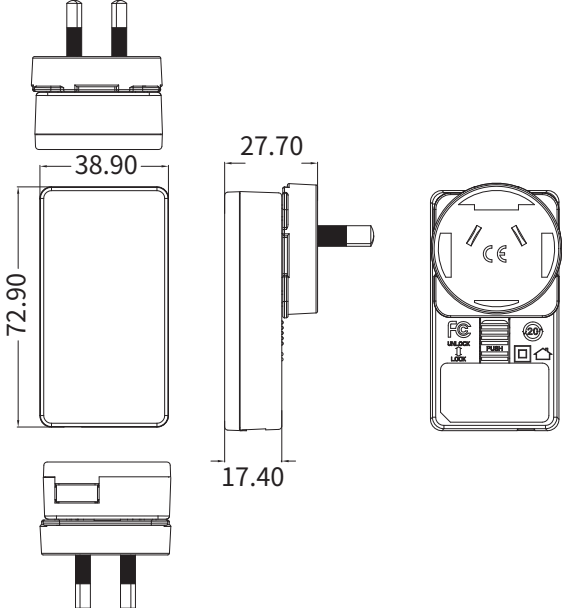
Output Condition	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	No-Load Power Consumption	Option/Remark
USB-A	5.0V	0.5A	±5%	100mV	200mV	73.16%	0.1W	
	5.0V	1.0A	±5%	150mV	200mV	73.62%	0.1W	

■ Measurement Condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec

UUAL Series	UUAZ Series

UUAE Series	UUAR Series
	
UUAK Series	UUAA Series
	

the following blank

■ Please contact our sales department for details of each model ■