

UNDE 120W P Series

Peak Load AC/DC Adaptor



▲ UNDEC3120-XXXXXXPA



▲ UNDET3120-XXXXXXPA



■ Please contact our sales department for safety standard of each model.



Product Highlights

- Stability
- Energy Efficiency
- Peak Load 5 Sec. Function
- Peak Load Is 190% Rating Output At Most.
- For Amplifier Products/Printers/Voice Assistants/Motors/Pump

Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection
- Over Temperature Protection (Optional)

Safety Standrd

- 60065-1
- 60950-1
- 62368-1
- PSE 別表第八

Efficiency

- Energy Efficiency Level VI (ErP / DoE)
- Meet COMMISSION REGULATION(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

Emissions

- FCC Part15 Class B
- VCCI Class B
- CE CISPR 32 EN55032
- BS EN55032

Immunity

- EN 55035
- BS EN55035

Electrical Spec

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	
Power Factor	ACIN 100V	0.9	-	-	-
	ACIN 230V	0.9	-	-	-

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection, Sea Level
Storage Temperature	-20	-	65	°C	Free Convection, Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing

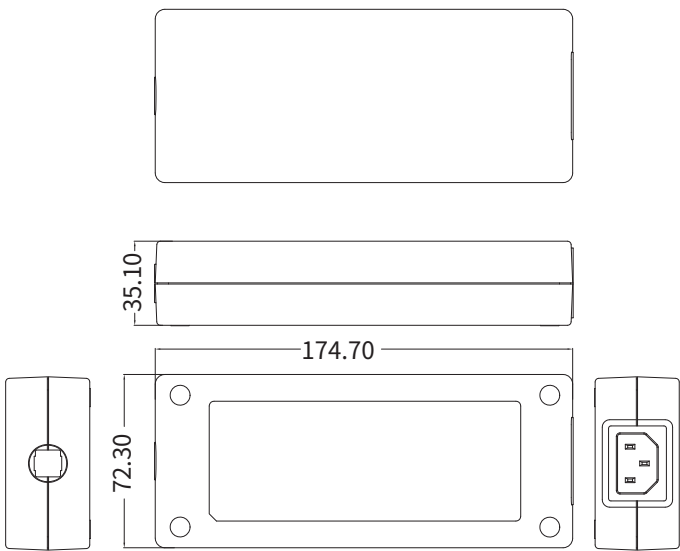
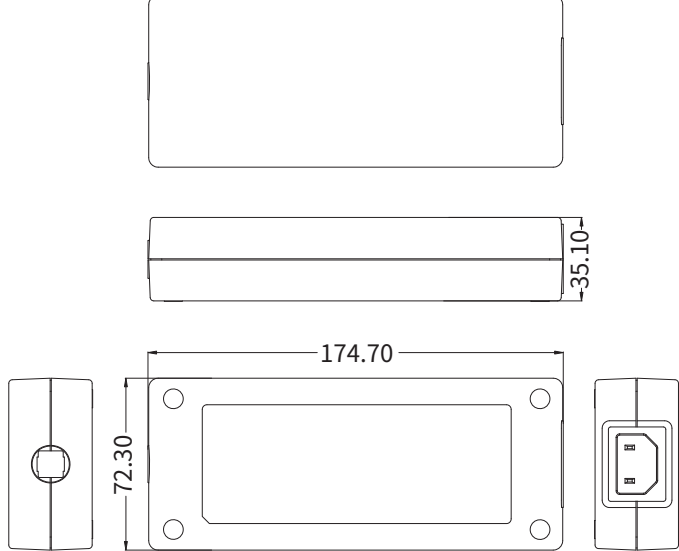
Typical model list

No.	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	DC Output Peak Current	Time (sec)	Average Active Efficiency	No-Load Power Consumption	Option/Remark
1	12.0V	10.0A	±5%	240mV	240mV	19.0A	5sec	88.00%	0.21W	
2	15.0V	8.0A	±5%	240mV	240mV	15.0A	5sec	88.00%	0.21W	
3	19.0V	6.3A	±5%	240mV	240mV	11.6A	5sec	88.00%	0.21W	
4	24.0V	5.0A	±5%	240mV	240mV	9.0A	5sec	88.00%	0.21W	

■ Measurement Condition

- Measurements shall be made with an oscilloscope with 20MHz bandwidth.
- Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec

UNDEC3120 P Series	UNDET3120 P Series
	

■ Please contact our sales department for details of each model ■