

# UNVCxN 5W Series

## I.C.T./AV AC/DC Adaptor Standard Product



▲ UNVCUN3005



▲ UNVCEN3005



▲ UNVCKN3005



▲ UNVCAN3005



▲ UNVCZN3005



■ Please contact our sales department for safety standard of each model.



### Product Highlights

- Stability
- Energy and High Efficiency
- Suitable for audio, video, information and communications technology equipment

### Efficiency

- Energy Efficiency Level VI ( ErP / DoE )
- Meet Commission Regulation(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430
- Meets ErP (EU) 2025/2052 energy efficiency standards

### Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection

### Emissions

- FCC
  - FCC Part15-B
- CE
  - EN(CISPR)55032-B
- VCCI-B
- BS EN 55032

### Safety Standard

- 62368-1
- PSE 別表第八

### Immunity

- EN55035
  - BS EN 55035
- The above specifications include the following test standards
- ✓ EN61000-4-2
  - ✓ EN61000-4-3
  - ✓ EN61000-4-4
  - ✓ EN61000-4-5
  - ✓ EN61000-4-6
  - ✓ EN61000-4-8
  - ✓ EN61000-4-11

## Electrical Spec

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection,Sea Level
Storage Temperature	-20	-	65	°C	Free Convection,Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing


## Typical model list

Model Name	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	Average Active Efficiency	No-Load Power Consumption	Option / Remark
UNVCxN3005-050010S	5.0V	1.0A	±5%	120mV	150mV	73.62%	0.1W	
UNVCxN3005-060Z50S	6.0V	0.5A	±5%	150mV	200mV	74.38%	0.1W	
UNVCxN3005-090Z50S	9.0V	0.5A	±5%	200mV	240mV	77.05%	0.1W	
UNVCxN3005-120Z50S	12.0V	0.5A	±5%	240mV	240mV	78.88%	0.1W	
UNVCxN3005-240Z20S	24.0V	0.2A	±5%	480mV	480mV	77.47%	0.1W	

■ Measurement Condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF Low ESR electrolytic capacitor to simulate system loading.

## Mechanical Spec

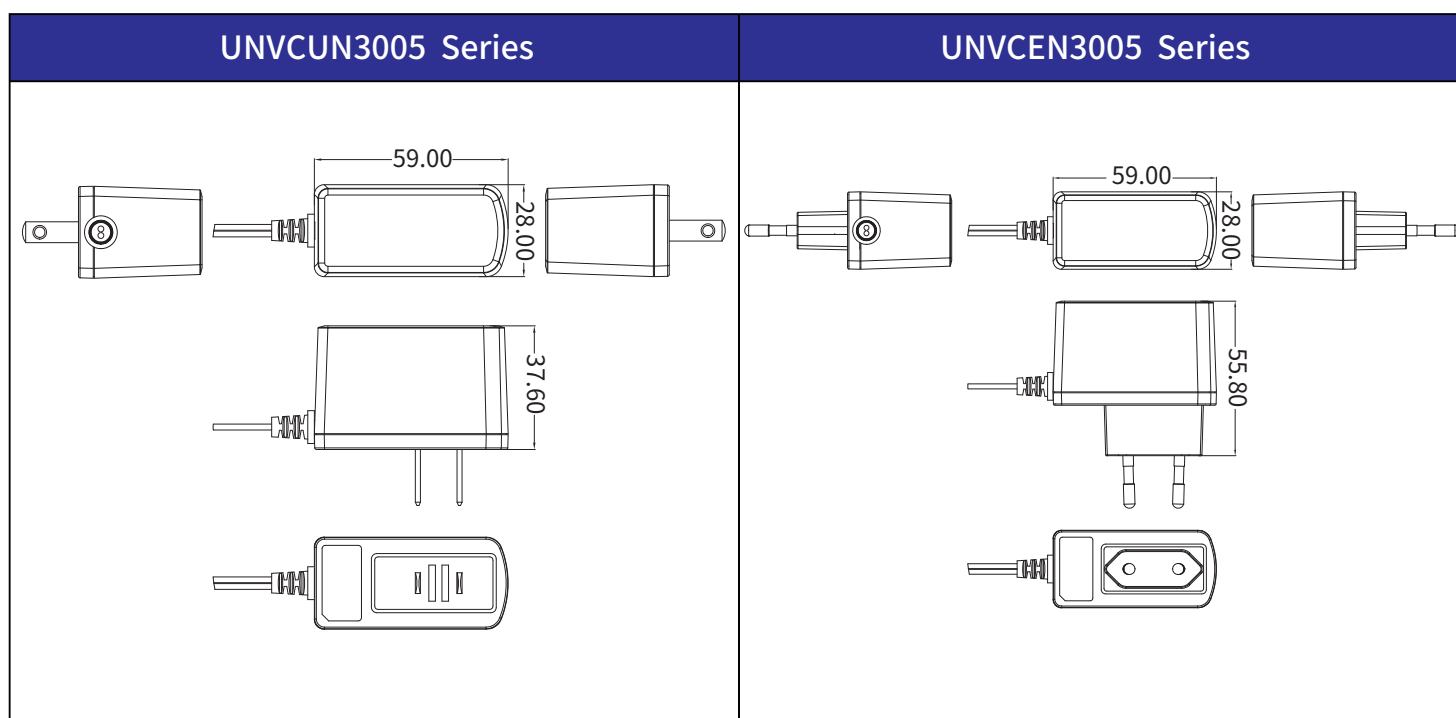

Mechanical Spec

UNVCKN3005 Series	UNVCAN3005 Series
<p>59.00 49.20 46.80</p>	<p>59.00 40.00 46.60</p>
UNVCZN3005 Series	
<p>59.00 28.00 37.60</p>	

— the following blank —

■ Please contact our sales department for details of each model ■