



Configuration used for determination 用於特性的配置
EMI 特性 Electro-Magnetic interference characteristics
(1)Conducted Emission

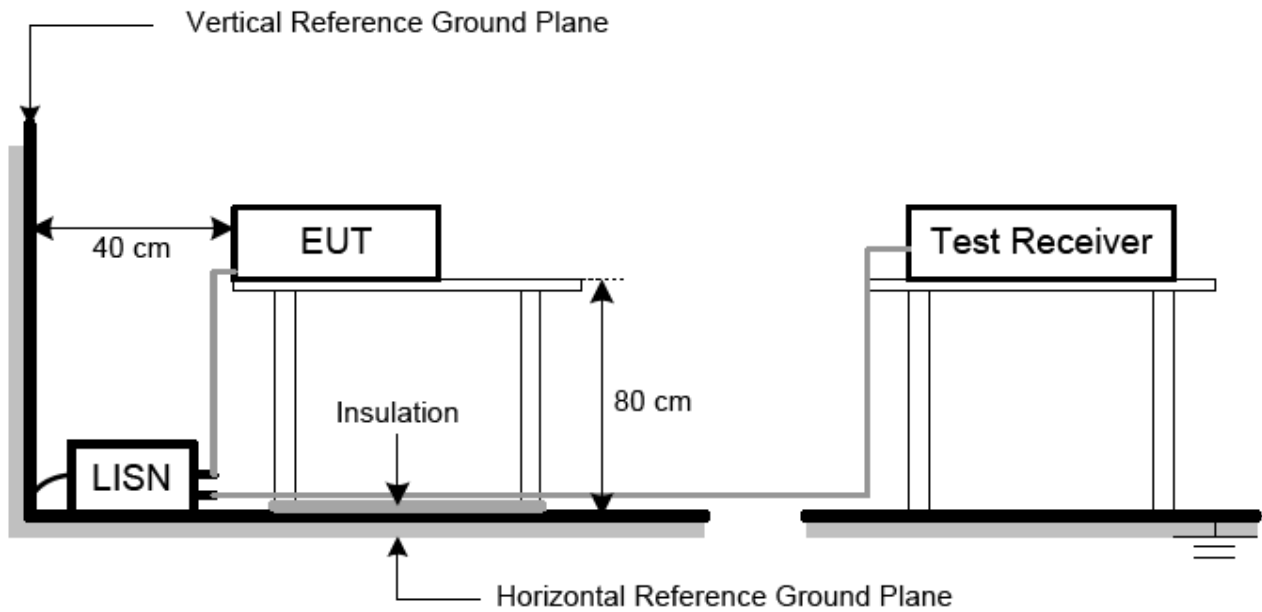

(2)Radiated Emission

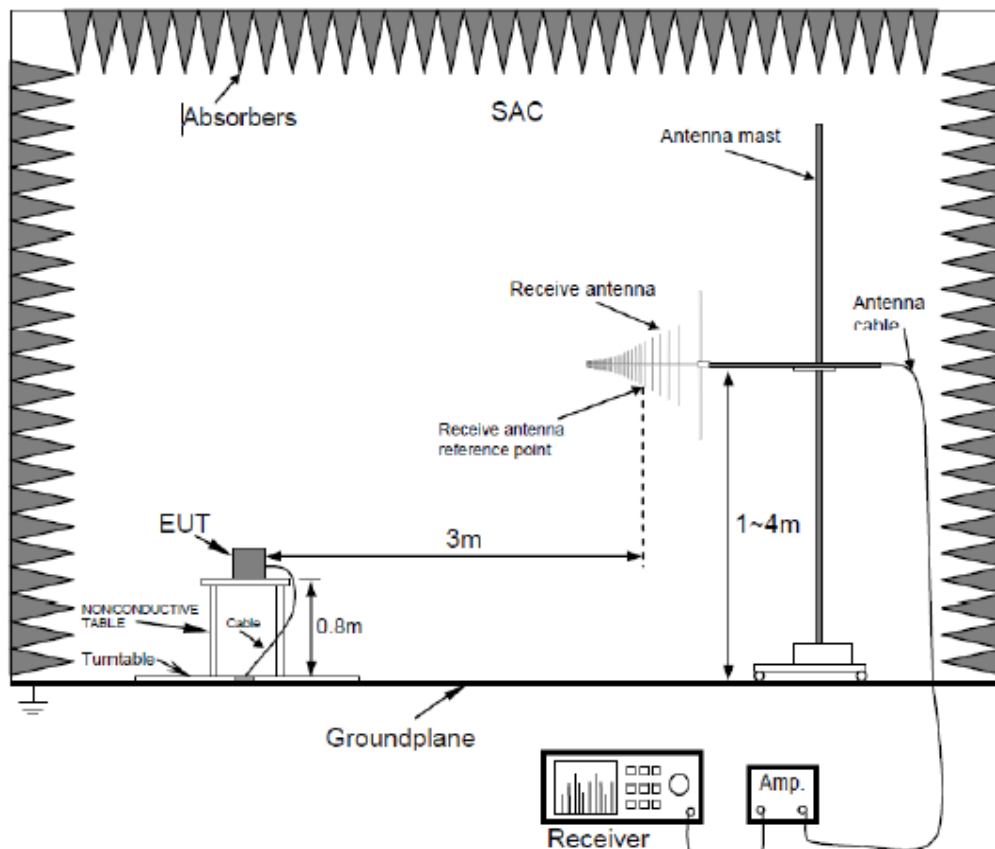

Conduction Character (傳導特性)

※Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	100Vac
2	I/P Frequency(Hz)(輸入頻率)	60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備):

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	KH3931
2	AC Source(變頻器)	ALL POWER/APG-1005N
3	Character Standard	EN55032 CLASS B

※Character Data(特性數據):


ITEM	QP	AV
Character Result	-9.6dB	-22.2dB
	-10.3dB	-22.5dB

※Character Waveform (特性波形):

EMI TEST REPORT

Organization: UNIFIVE Operator: ZYN EUT: UxOWT3010-033020SA
Place: EMI Time: 2023/6/1/15:34 Test equipment: KH3931
Detector: PK+AV Test-time(ms): 30 SN: 310771
Limit: EN55032 Transductor(PK/AV): PK / AV JZ: 2,14,1477
Remark: 100V L LOAD=2A(1.65R)

Start(MHz) End(MHz) Step(MHz) freq, step
0.150 2.000 0.002
2.000 10.000 0.010
10.000 30.000 0.025 scan result

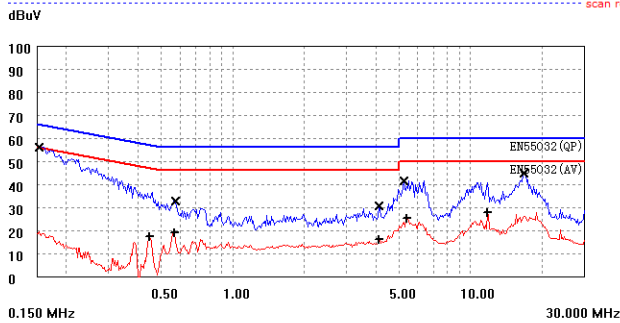


[QP]	freq(MHz)	lev(dBuV)	Lim(dBuV)	Δ(lev-Lim)
	0.154	56.2	65.8	-9.6
	0.576	32.9	56.0	-23.1
	4.130	30.5	56.0	-25.5
	5.260	41.5	60.0	-18.5
	16.750	44.8	60.0	-15.2
[AV]	freq(MHz)	lev(dBuV)	Lim(dBuV)	Δ(lev-Lim)
	0.448	17.1	46.9	-29.8
	0.570	19.1	46.0	-26.9
	4.130	16.0	46.0	-30.0
	5.390	25.0	50.0	-25.0
	11.750	27.8	50.0	-22.2

EMI TEST REPORT

Organization: UNIFIVE Operator: ZYN EUT: UxOWT3010-033020SA
Place: EMI Time: 2023/6/1/15:28 Test equipment: KH3931
Detector: PK+AV Test-time(ms): 30 SN: 310771
Limit: EN55032 Transductor(PK/AV): PK / AV JZ: 2,14,1477
Remark: 100V N LOAD=2A(1.65R)

Start(MHz) End(MHz) Step(MHz) freq, step
0.150 2.000 0.002
2.000 10.000 0.010
10.000 30.000 0.025 scan result

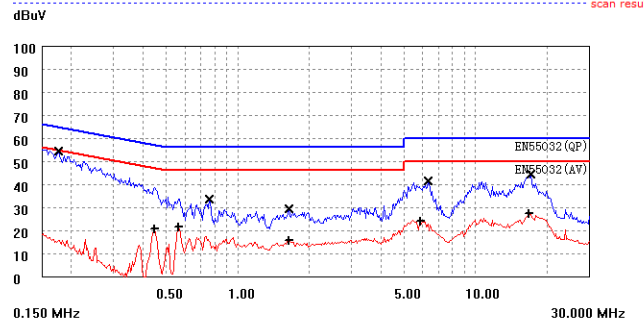

[QP]	freq(MHz)	lev(dBuV)	Lim(dBuV)	Δ(lev-Lim)
	0.176	54.4	64.7	-10.3
	0.760	33.4	56.0	-22.6
	1.644	29.4	56.0	-26.6
	6.350	41.5	60.0	-18.5
	17.025	44.4	60.0	-15.6
[AV]	freq(MHz)	lev(dBuV)	Lim(dBuV)	Δ(lev-Lim)
	0.446	20.5	46.9	-26.5
	0.564	21.6	46.0	-24.4
	1.644	15.8	46.0	-30.2
	5.850	23.8	50.0	-26.2
	16.850	27.5	50.0	-22.5

Conduction Character (傳導特性)

※Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備):

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	KH3931
2	AC Source(變頻器)	ALL POWER/APG-1005N
3	Character Standard	EN55032 CLASS B

※Character Data(特性數據):

ITEM	QP	AV
Character Result	-16.2dB	-23.1dB
	-16.1dB	-21.7dB


※Character Waveform (特性波形):

EMI TEST REPORT

Organization: UNIFIVE Operator: ZYN EUT: UxOWT3010-033020SA
 Place: EMI Time: 2023/6/1/15:12 Test equipment: KH3931
 Detector: PK+AV Test-time(ms): 30 SN: 310771
 Limit: EN55032 Transductor(PK/AV): PK / AV JZ: 2,14,1477
 Remark: 230V L LOAD=2A(1.65R)

Start(MHz)	End(MHz)	Step(MHz)
0.150	2.000	0.002
2.000	10.000	0.010
10.000	30.000	0.025

dBuV

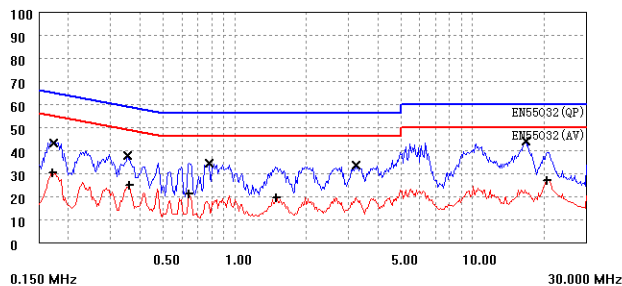


[QP]	freq(MHz)	lev(dBuV)	Lim(dBuV)	Δ(lev-Lim)
	0.174	43.3	64.8	-21.4
	0.356	37.9	58.8	-21.0
	0.780	34.4	56.0	-21.6
	3.230	33.5	56.0	-22.5
	16.750	43.8	60.0	-16.2
[AV]	freq(MHz)	lev(dBuV)	Lim(dBuV)	Δ(lev-Lim)
	0.172	30.4	54.9	-24.5
	0.360	24.8	48.7	-23.9
	0.644	21.0	46.0	-25.0
	1.502	19.4	46.0	-26.6
	20.600	26.9	50.0	-23.1

EMI TEST REPORT

Organization: UNIFIVE Operator: ZYN EUT: UxOWT3010-033020SA
 Place: EMI Time: 2023/6/1/15:21 Test equipment: KH3931
 Detector: PK+AV Test-time(ms): 30 SN: 310771
 Limit: EN55032 Transductor(PK/AV): PK / AV JZ: 2,14,1478
 Remark: 230V N LOAD=2A(1.65R)

Start(MHz)	End(MHz)	Step(MHz)
0.150	2.000	0.002
2.000	10.000	0.010
10.000	30.000	0.025

dBuV

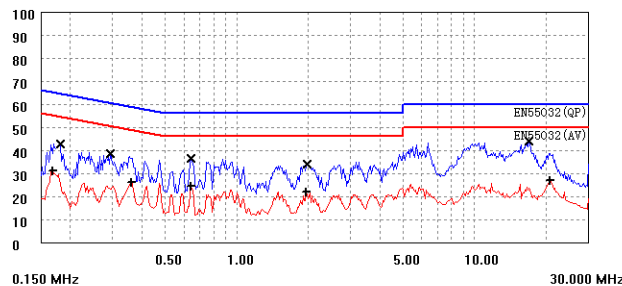

[QP]	freq(MHz)	lev(dBuV)	Lim(dBuV)	Δ(lev-Lim)
	0.182	42.7	64.4	-21.7
	0.294	38.5	60.4	-21.9
	0.644	36.3	56.0	-19.7
	1.982	33.8	56.0	-22.2
	16.950	43.9	60.0	-16.1
[AV]	freq(MHz)	lev(dBuV)	Lim(dBuV)	Δ(lev-Lim)
	0.168	30.9	55.1	-24.2
	0.362	26.1	48.7	-22.5
	0.640	24.3	46.0	-21.7
	1.968	22.0	46.0	-24.0
	20.775	26.8	50.0	-23.2

Radiation Character (輻射特性)

※Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	100Vac
2	I/P Frequency(Hz)(輸入頻率)	60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS


※Character Equipment(特性設備):

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	外面實驗室
2	AC Source(變頻器)	外面實驗室
3	Character Standard	CISPR32 CLASS B

※Character Data(特性數據):

ITEM	peak	QP
Character Result		
V line	-5.82dB	/
H line	-11.46dB	/

※Character Waveform (特性波形):

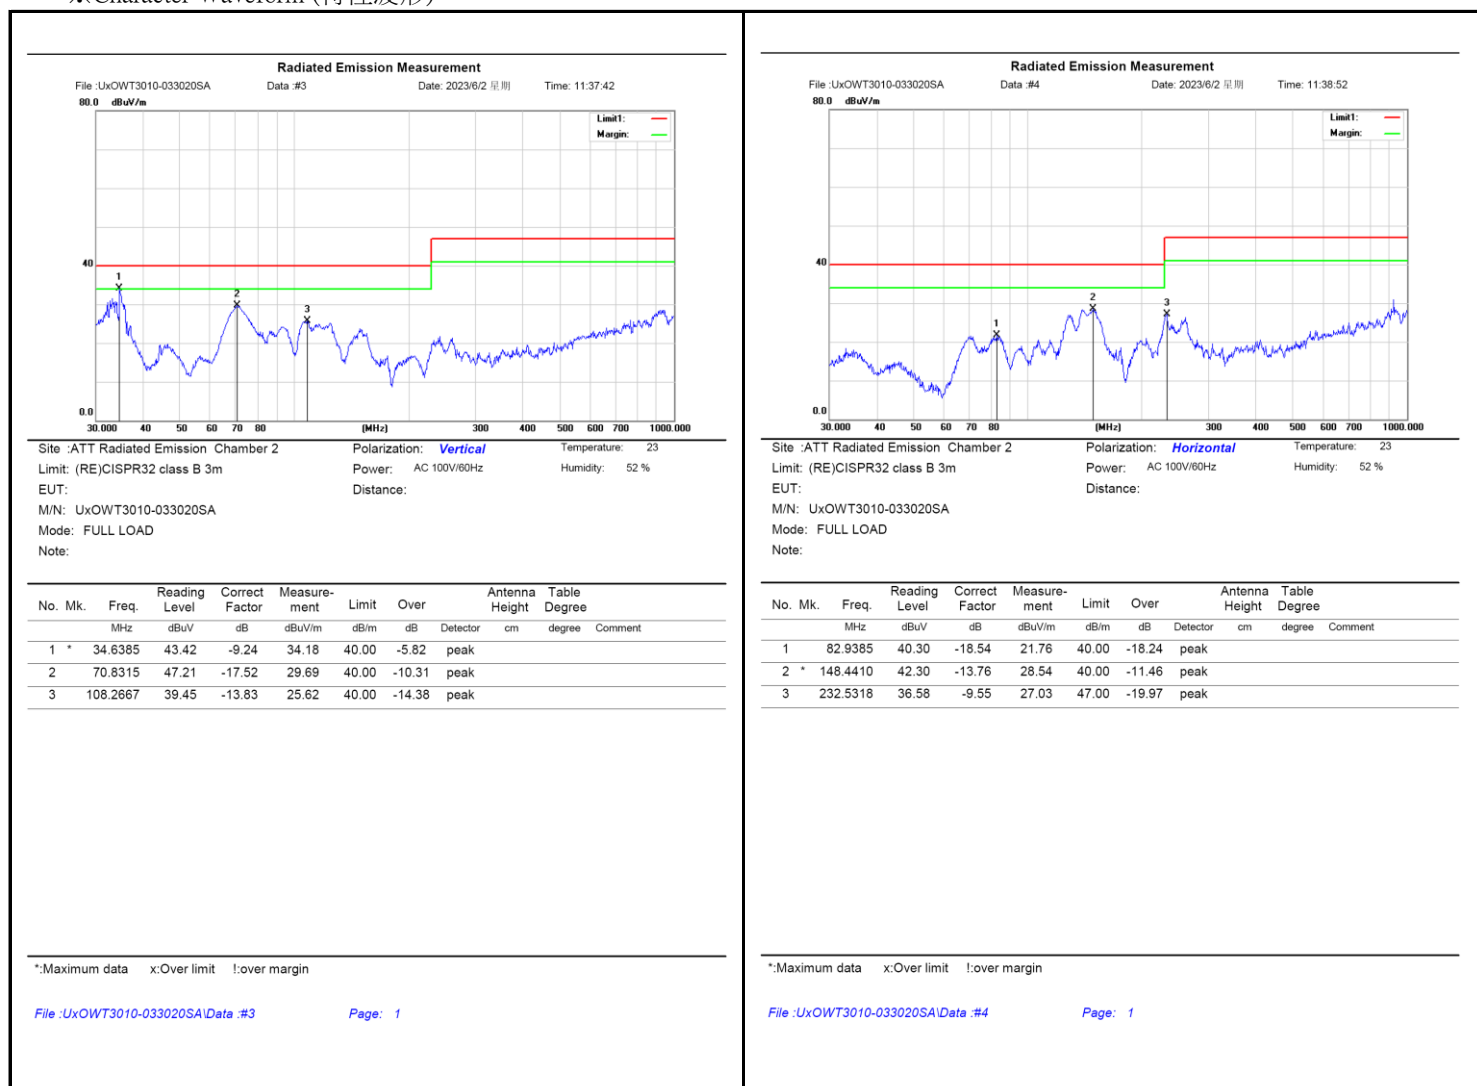

Radiation Character (輻射特性)

※Character Condition(特性條件) :

1	I/P Voltage(Vac)(輸入電壓)	230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS


※Character Equipment(特性設備) :

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	外面實驗室
2	AC Source(變頻器)	外面實驗室
3	Character Standard	CISPR32 CLASS B

※Character Data(特性數據) :

ITEM	peak	QP
Character Result	V line	-3.57dB
	H line	-9.39dB

※Character Waveform (特性波形) :

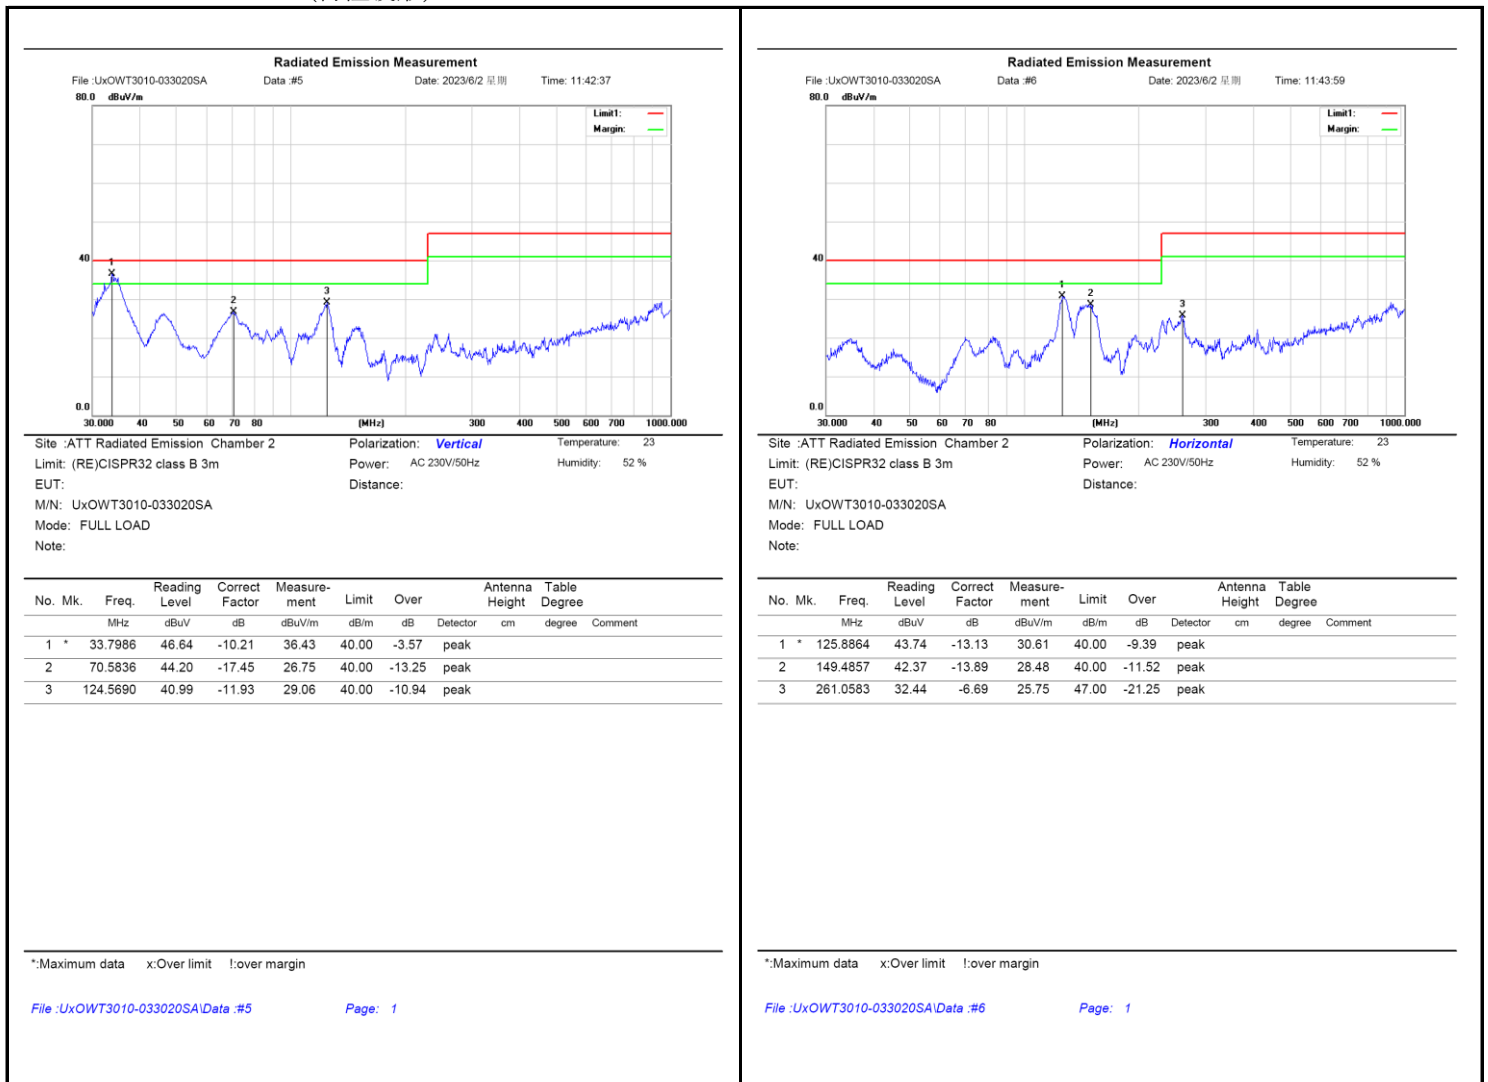

EFT Character (電子脈衝群干擾特性)

※Character Condition(特性條件) :

1	I/P Voltage(Vac)(輸入電壓)	100Vac/230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz / 60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備) :

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	BEST EMC SOLUTION	EMCSOSIN / EFT-S4
2	AC Source(變頻器)	ALL POWER/APG-1005N

※Character Standard(特性標準) :

1	Character Standard	IEC 61000-4-4
EFT Character		
	Spec.	1KV
	O/P	Full Load
	I/P	100Vac/60Hz & 230Vac/50Hz
	Burst	15ms/300ms
	Character Duration	1 min
	Pulse Rate:	5KHz/100KHz

※Character Data(特性數據) 產品類別: Class I

Power Line	Pulse Polarity	Character Voltage	Required Criteria	Complied To Criteria(A,B,C)	Judgement
L	"+" / "-"	1KV	Criteria B	Criteria A	PASS
N	"+" / "-"	1KV	Criteria B	Criteria A	PASS
L-N	"+" / "-"	1KV	Criteria B	Criteria A	PASS
PE	"+" / "-"	1KV	Criteria B	Criteria A	PASS
L-PE	"+" / "-"	1KV	Criteria B	Criteria A	PASS
N-PE	"+" / "-"	1KV	Criteria B	Criteria A	PASS
L-N-PE	"+" / "-"	1KV	Criteria B	Criteria A	PASS

※Character Performance & Result :

- ☒ Criteria A: The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- ☐ Criteria B: The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- ☐ Criteria C: Temporary loss of function is allowed, provided the function self recoverable or can be restored by the operation of controls

ESD Character (靜電干擾特性)

※Character Condition(特性條件) :

1	I/P Voltage(Vac)(輸入電壓)	100Vac/230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz / 60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備) :

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	EMC-PARTNER	PRIMA /ESD61002TB
2	AC Source(變頻器)	ALL POWER/APG-1005N

※Character Standard(特性標準) :

1	Character Standard	IEC 61000-4-2:2001
ESD Character		
Spec.	Air: ±8.0KV	Contact: ±4.0KV
O/P	Full Load	
I/P	100Vac/60Hz & 230Vac/50Hz	
Description of Observation:	NO Abnormal Issue	
Performance Criterion:	Manufacturer (According to Standard/Manufacturer)	

※Character Data(特性數據) :

Item	Amount of Discharge	Voltage	Required Criteria	Complied To Criteria(A,B,C)	Judgement
Air Discharge	Mini 10/Point	±8.0KV	Criteria B	Criteria A	PASS
Contact Discharge	Mini 25/Point	±4.0KV	Criteria B	Criteria A	PASS
Indirect Discharge(HCP)	Mini 25/Point	±4.0KV	Criteria B	Criteria A	PASS
Indirect Discharge(VCP Front)	Mini 25/Point	±4.0KV	Criteria B	Criteria A	PASS
Indirect Discharge(VCP Left)	Mini 25/Point	±4.0KV	Criteria B	Criteria A	PASS
Indirect Discharge(VCP Back)	Mini 25/Point	±4.0KV	Criteria B	Criteria A	PASS
Indirect Discharge(VCP Right)	Mini 25/Point	±4.0KV	Criteria B	Criteria A	PASS

※Character Performance & Result :

- ☒ Criteria A: The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- ☐ Criteria B: The apparatus continues to operate as intended after test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- ☐ Criteria C: Temporary loss of function is allowed, provided the function self recoverable or can be restored by the operation of controls

Light Surge Character (雷擊特性)

※Character Condition(特性條件) :

1	I/P Voltage(Vac)(輸入電壓)	100Vac/230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz / 60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備) :

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	EMC-PARTNER	Prima/ SUG61005TAX
2	AC Source(變頻器)	ALL POWER/APG-1005N

※Character Standard(特性標準) :

1	Character Standard	IEC 61000-4-5:1995+ A1:2001
SURGE Character		
Spec.	Line to Line $\pm 1KV$; Line to FG $\pm 2KV$	
O/P	Full load	
I/P	100Vac/60Hz & 230Vac/50Hz	
REP.RATE	60 sec	
Description of Observation:	NO Abnormal Issue	
Performance Criterion:	Manufacturer (According to Standard/Manufacturer)	

※Character Data(特性數據) 產品類別: Class I

Character Point	Character Voltage	Polarity	Phase Angle				Required Criteria	Complied To Criteria(A,B,C)	Judgement
			0°	90°	180°	270°			
L-N	1KV	+	OK	OK	OK	OK	Criteria B	Criteria A	PASS
		-	OK	OK	OK	OK	Criteria B	Criteria A	PASS
L-GND	2KV	+	OK	OK	OK	OK	Criteria B	Criteria A	PASS
		-	OK	OK	OK	OK	Criteria B	Criteria A	PASS
N-GND	2KV	+	OK	OK	OK	OK	Criteria B	Criteria A	PASS
		-	OK	OK	OK	OK	Criteria B	Criteria A	PASS
L,N-GND	2KV	+	OK	OK	OK	OK	Criteria B	Criteria A	PASS
		-	OK	OK	OK	OK	Criteria B	Criteria A	PASS

Class II Type : Character L-N Only.

※Character Performance & Result :

- ☒ Criteria A: The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- ☐ Criteria B: The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- ☐ Criteria C: Temporary loss of function is allowed, provided the function self recoverable or can be restored by the operation of controls

DIPS Character(周波跌落特性)

※Character Condition(特性條件) :

1	I/P Voltage(Vac)(輸入電壓)	100~230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz/60Hz
3	Output load(輸出負載)	Full load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS
6		

※Character Parameters(特性參數) :

DIPS Character	
Condition :	According EN61000-4-11 (full load and high line)
	Voltage Dips 100% Redaction 10ms/20ms ; 60% Redaction 200ms/240ms ; 30% Redaction 500 ms/600ms Voltage Interruption : $\geq 95\%$; Redaction 5000ms/6000ms

※Character Data(特性數據) :

Character Level	% UT	Reduction (%)	Duration (Periods)	Perform Criteria	Results	Judgement
0		100	0.5/1	B	Criteria A	PASS
40		60	10/12	C	Criteria B	PASS
70		30	25/30	C	Criteria B	PASS
0		100	250/300	C	Criteria B	PASS

※Character Performance & Result :

- Criteria A:** The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
- Criteria B:** The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
- Criteria C:** Temporary loss of function is allowed, provided the function self recoverable or can be restored by the operation of controls

Radiated Radio-Frequency Electromagnetic Field Immunity Character (IEC61000-4-3) (RS特性)

※Character Condition(特性條件)：

1	I/P Voltage(Vac)(輸入電壓)	100Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備)：

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	廠外部實驗室
2	AC Source(變頻器)	廠外部實驗室

※Character Standard(特性標準)：

RS TEST DATA						
Freq.Range(MHz)	RF Field Position	R.F. Field Strength	Azimuth	Perform Criteria	Results	Judgment
80MHz-1000MHz	Vertical/Horizontal	1V(rms) AM Modulated 1000Hz, 80%	Front	A	A	PASS
			Back			
			Left			
			Right			

Conducted Disturbances Induced by Radio-Frequency Field Immunity Character (IEC61000-4-6) (CS特性)

※Character Condition(特性條件)：

1	I/P Voltage(Vac)(輸入電壓)	100Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備)：

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	廠外部實驗室
2	AC Source(變頻器)	廠外部實驗室

※Character Standard(特性標準)：

CS TEST DATA					
Test Ports (Mode)	Freq.Range(MHz)	Field Strength	Perform Criteria	Results	Judgment
Input/Output AC. Power Port	0.15-80MHz	3V(rms) AM Modulated 1000Hz, 80%	A	A	PASS

Power Frequency Magnetic Field Immunity Character (IEC61000-4-8) (PFMF特性)

※Character Condition(特性條件)：

1	I/P Voltage(Vac)(輸入電壓)	100Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz/ 60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※Character Equipment(特性設備)：

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	頻普接收儀	廠外部實驗室
2	AC Source(變頻器)	廠外部實驗室

※Character Standard(特性標準)：

Magnetic Field Immunity					
Test Ports (Mode)	Frequency(Hz)	Field Strength	Perform Criteria	Results	Judgment
X Orientation	50/60	1A/m	A	A	PASS
Y Orientation			A	A	PASS
Z Orientation			A	A	PASS