

Table of contents(目錄)

Paper

1-1.Line&Load Regulation And Temperature Chafaile Character (輸入&負荷及溫度變動特性)-----	4
1-2.Ripple And Noise Character(紋波特性)-----	5~6
1-3.Over-Voltage Protection (過電壓保護特性)-----	7
1-4.Over-Current Protection (過電流保護特性)-----	8
1-5.Dynamic ripple Character(動態負載特性)-----	9
1-6.Efficiency Character(效率特性)-----	10
1-7.Input&Load Change Character(輸入&負荷變動特性)-----	11
1-8.Inrush Current (浪涌電流)-----	12
1-9.Turn On Delay(開機爬升延遲時間)-----	13
2-1.Hold Up Time Character (保持時間)-)-----	14
2-2.Low Vac Shut Off (輸入欠壓關斷特性)-----	15
2-3. Over Shoot(過沖特性)-----	16
2-4.Under Shoot(下沖特性)-----	17
2-5.Leak Current (漏電流特性)-----	18

Evaluation Method 評價方法

Circuit used for determination 特性電路圖

Circuit 1 特性回路1

Line&Load Regulation And Temperature Chafaile Character (輸入&負荷及溫度變動特性)

Over-Voltage Protection (過電壓保護特性)

Over-Current Protection (過電流保護特性)

Dynamic ripple Character(動態負載特性)

Efficiency Character(效率特性)

Input&Load Change Character(輸入&負荷變動特性)


Turn On Delay(開機爬升延遲時間)

Hold Up Time Character (保持時間)

Low Vac Shut Off (輸入欠壓關斷特性)


Over Shoot(過沖特性)

Under Shoot(下沖特性)

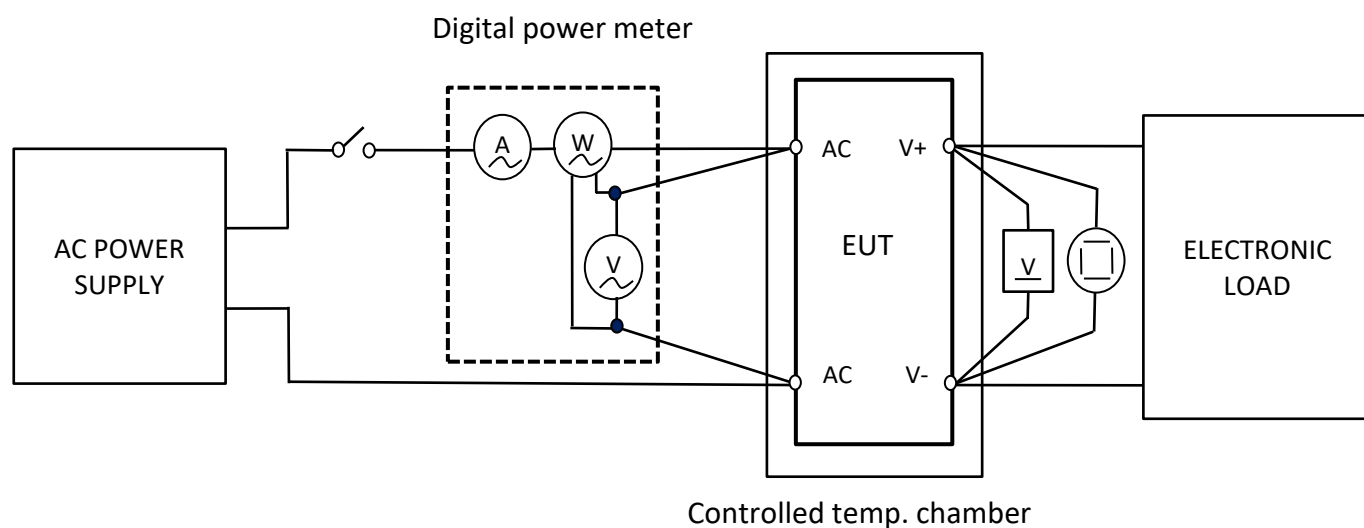


Circuit 2 特性回路2

Inrush Current (浪涌電流)

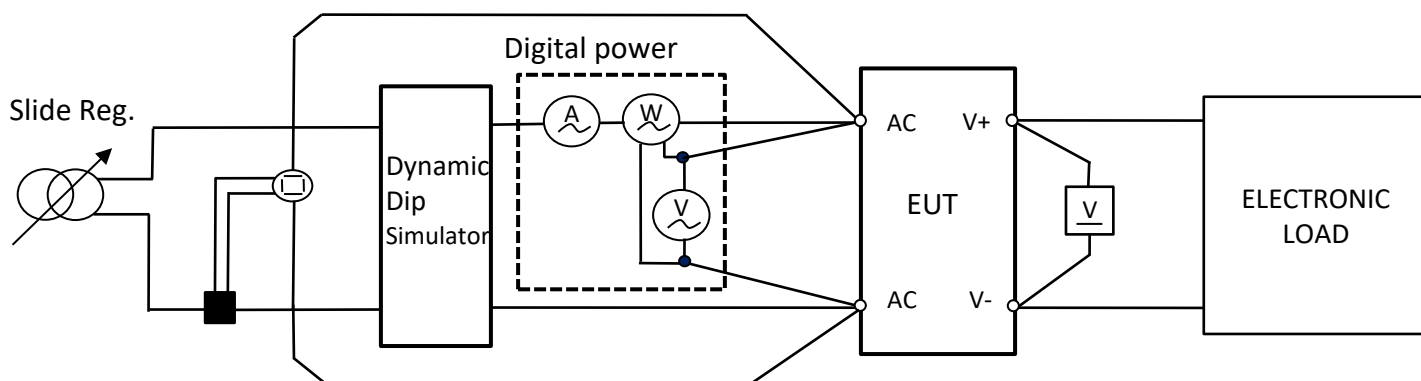


Circuit 3 特性回路3

Leak Current (漏電流特性)

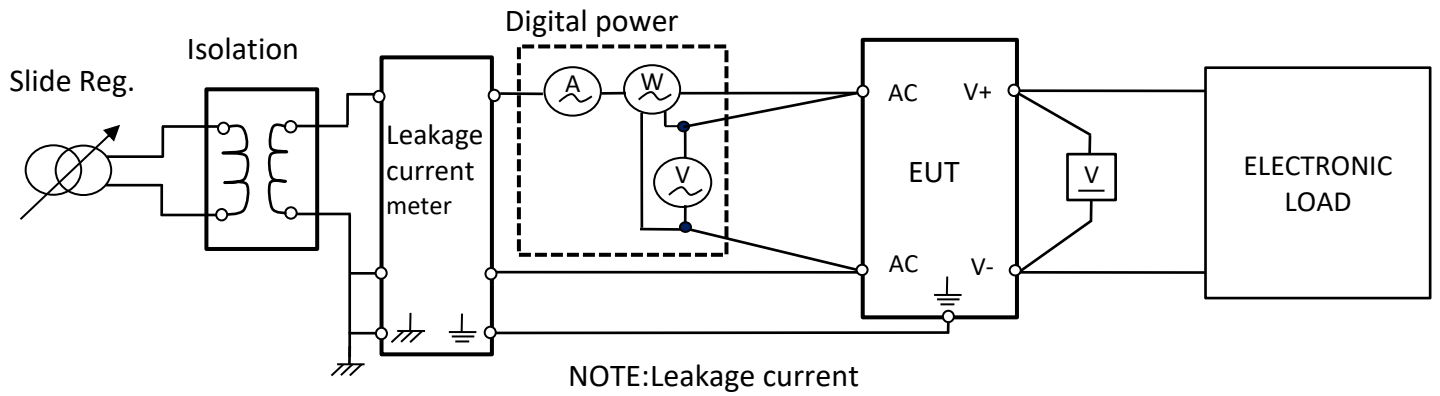

Circuit 4 特性回路4

Ripple And Noise Character(紋波特性)

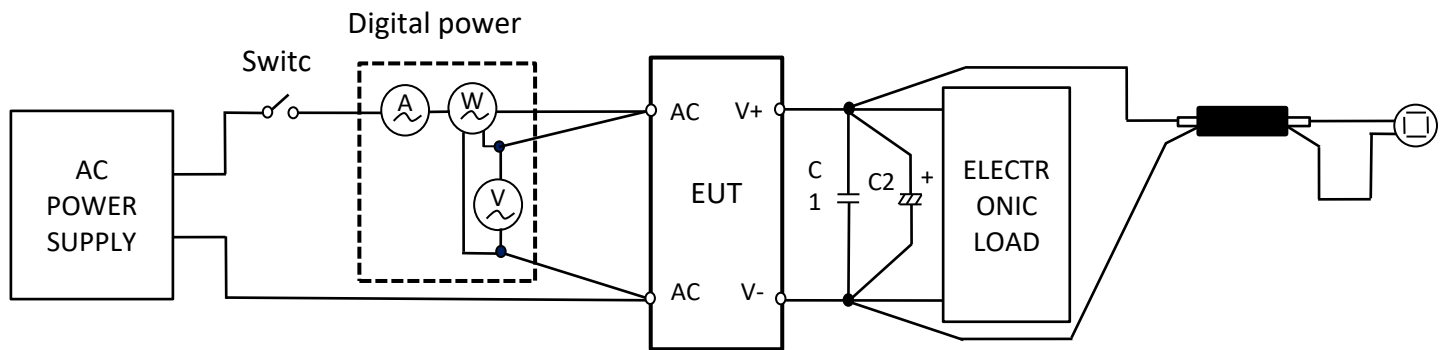

C1 : 0.1 μ F CERAMICS CAPACITOR

C2 : 10 μ 100V ALUMINUM CAPACITOR

THE BANDWIDTH OF OSCILLOSCOPE IS SET WITH 20MHz

1.ELECTRICAL FUNCTION Character(電氣特性)

1-1.Line&Load Regulation And Temperature Chafaile Character (輸入& 負荷及溫度變動特性)

※ Character Condition(特性條件)：

1	I/P Voltage(Vac)(輸入電壓)	85Vac/100Vac/240Vac/265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz ~63Hz
3	Output Load(輸出負載)	0%,25%,50%,75%,100% Of Full Load
4	Regulation(調整率)	Load Regulation: $\leq 10\%$; Line Regulation $\leq 2\%$
5	Ambient Temp.(°C)(環境溫度)	25°C
6	Sample Size(取樣數)	1PCS

Output voltage	24.0V
----------------	-------

※ Character Data(特性數據)：

I/P O/P	85Vac/63Hz	100Vac/60Hz	240Vac/50Hz	265Vac/47Hz	Line Regulation $\leq 2\%$
0%	22.78V	22.78V	22.78V	22.79V	0.04%
25%	22.62V	22.64V	22.64V	22.65V	0.12%
50%	22.47V	22.49V	22.51V	22.51V	0.17%
75%	22.34V	22.35V	22.36V	22.38V	0.17%
100%	22.2V	22.2V	22.23V	22.25V	0.21%
Load Regulation: $\leq 10\%$	2.42%	2.42%	2.29%	2.25%	

1-2.1 Ripple And Noise Character (紋波與雜訊)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	85Vac/100Vac/240Vac/265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz ~63Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	-10°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

I/P	85Vac/63Hz		100Vac/60Hz		240Vac/50Hz		265Vac/47Hz	
ITEM	Ripple	Noise	Ripple	Noise	Ripple	Noise	Ripple	Noise
-10°C	144.0mV	160.0mV	136.0mV	152.0mV	136.0mV	126.0mV	136.0mV	128.0mV

※ Character Waveform (特性波形):

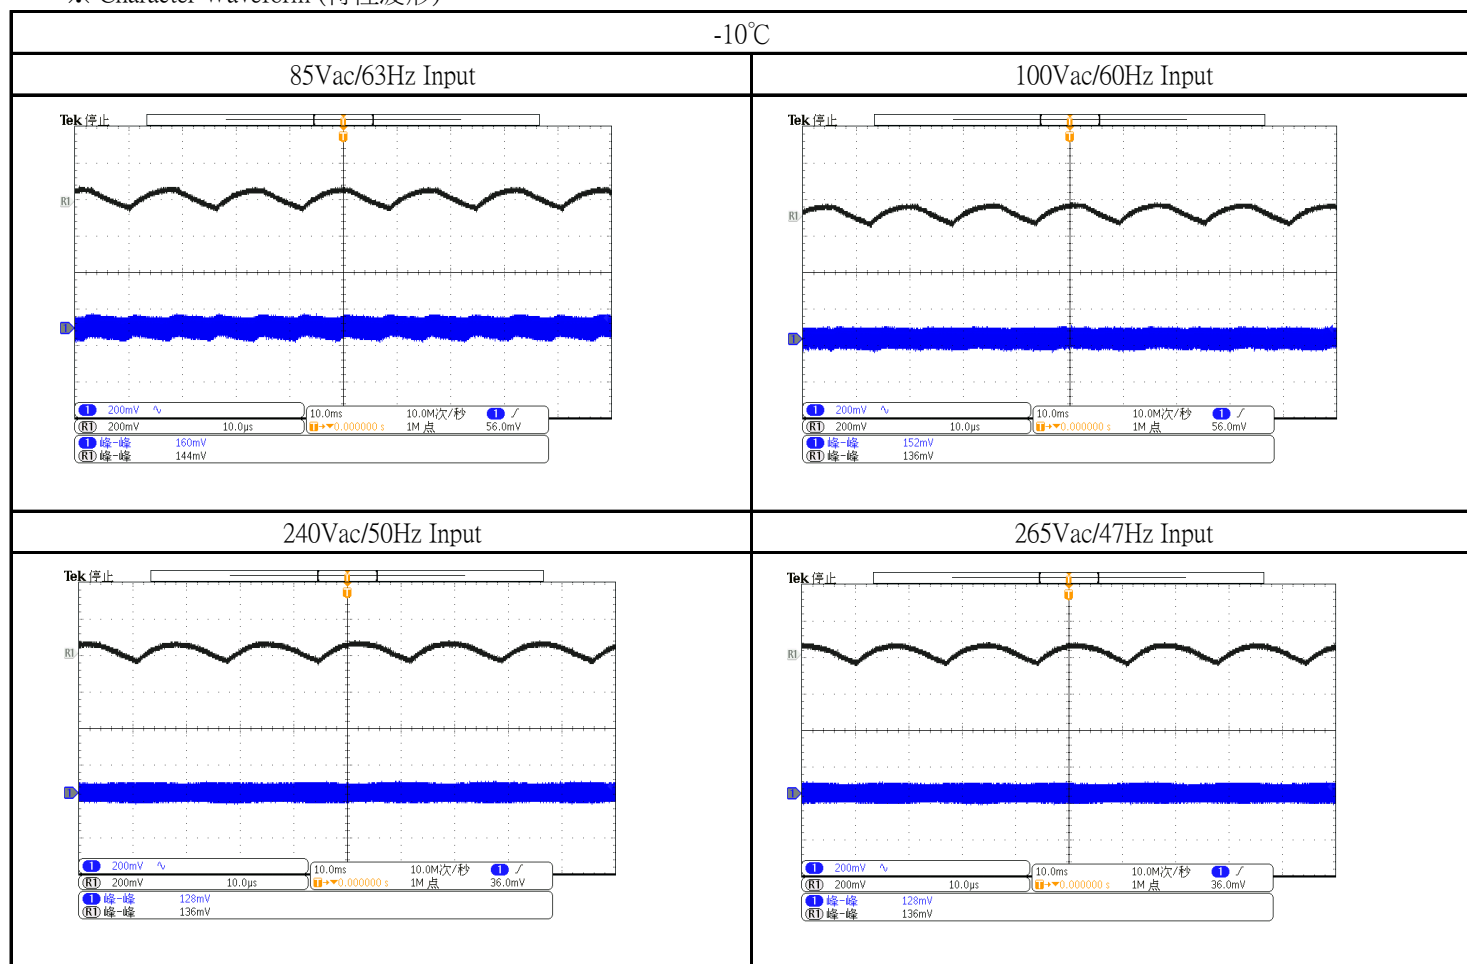

1-2.3 Ripple And Noise Character (紋波與雜訊)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	85Vac/100Vac/240Vac/265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz ~63Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	50°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

I/P	85Vac/63Hz		100Vac/60Hz		240Vac/50Hz		265Vac/47Hz	
ITEM	Ripple	Noise	Ripple	Noise	Ripple	Noise	Ripple	Noise
50°C	48.0mV	76.0mV	50.0mV	58.0mV	50.0mV	50.0mV	46.0mV	54.0mV

※ Character Waveform (特性波形):

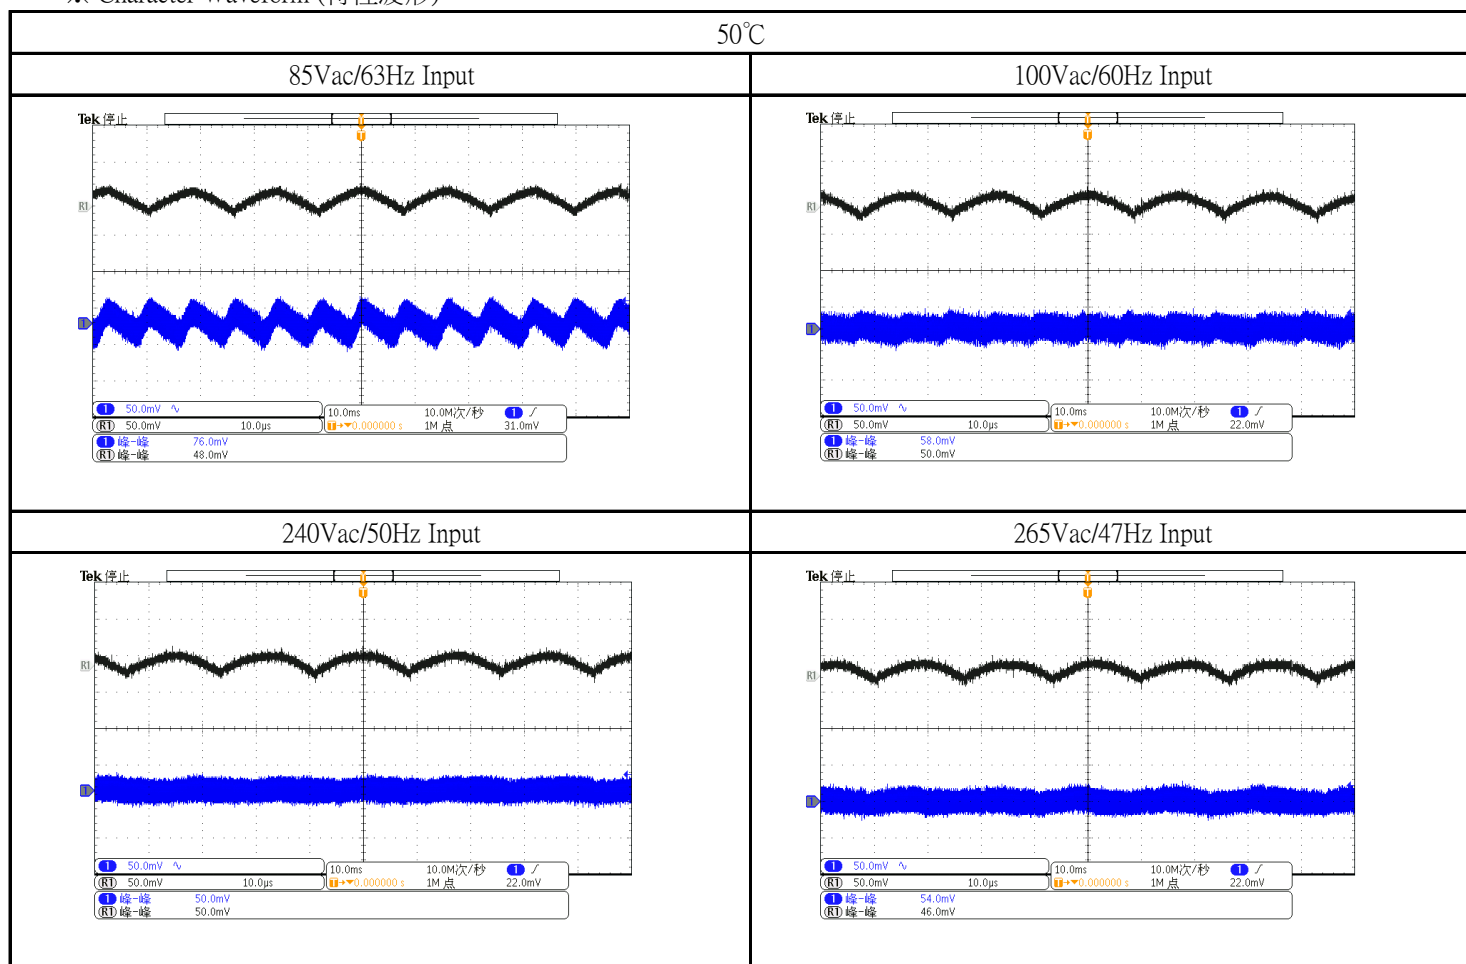

1-3.Over-Voltage Protection(過電壓保護特性)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	85Vac/265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz /63Hz
3	Output Load(輸出負載)	No/Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

O/P	No Load		Full Load	
I/P	85Vac/63Hz	265Vac/47Hz	85Vac/63Hz	265Vac/47Hz
Character Result	28.8V	28.4V	28.0V	28.0V

※ Character Waveform (特性波形):

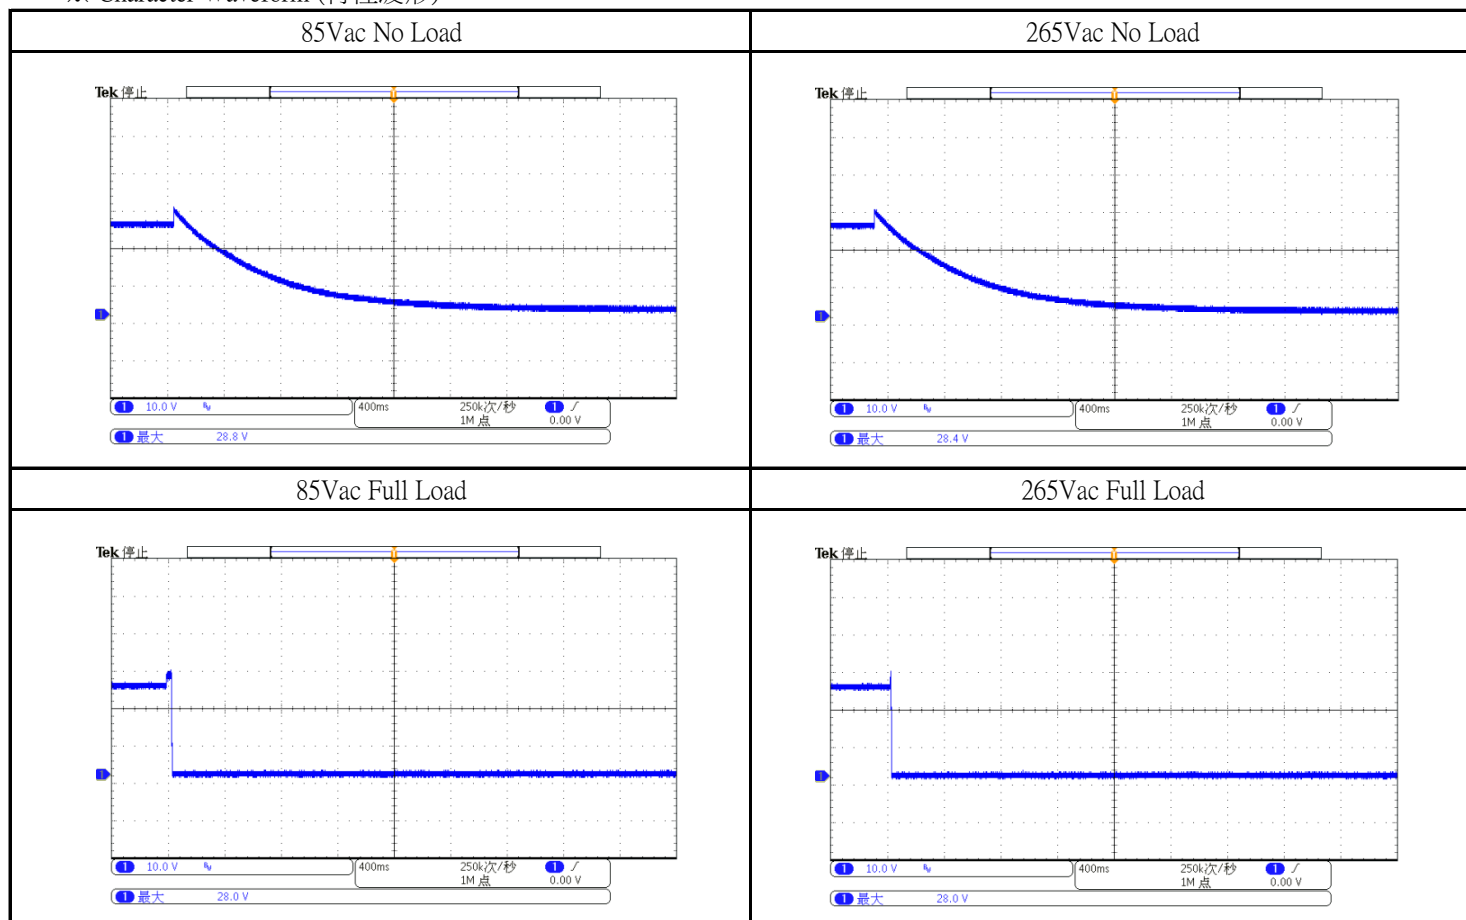

1-4.Over-Current Protection(過電流保護特性)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	85Vac/100Vac/240Vac/265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz ~63Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

I/P	85V/63Hz	100V/60Hz	240V/50Hz	265V/47Hz
O.C.P點	3.75A	4.01A	4.24A	4.19A

I/P	85V/63Hz										
Voltage(V)	24.070	23.990	23.945	23.903	23.861	23.819	23.803	0.000	0	0	0
Current(A)	0	1	1.5	2	2.5	3	3.2	3.75	4.01	4.19	4.24
I/P	100V/60Hz										
Voltage(V)	24.070	23.992	23.948	23.905	23.863	23.820	23.805	23.757	0	0	0
Current(A)	0	1	1.5	2	2.5	3	3.2	3.75	4.01	4.19	4.24
I/P	240V/50Hz										
Voltage(V)	24.080	23.997	23.954	23.910	23.867	23.828	24	24	24	23.73	0
Current(A)	0	1	1.5	2	2.5	3	3.2	3.75	4.01	4.19	4.24
I/P	265V/47Hz										
Voltage(V)	24.084	24.000	23.958	23.915	23.87	23.83	23.82	23.78	23.75	0	0
Current(A)	0	1	1.5	2	2.5	3	3.2	3.75	4.01	4.19	4.24

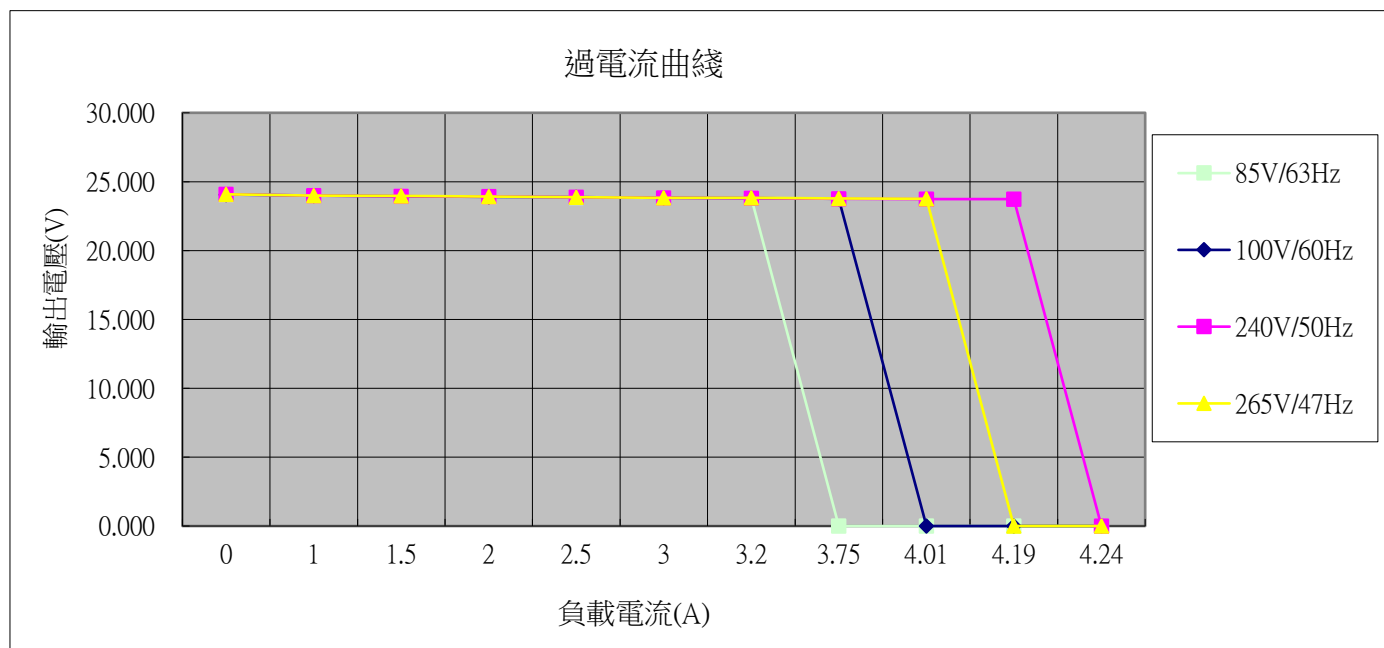

1-5. Dynamic ripple Character(動態負載特性)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	85Vac/265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz /63Hz
3	Output Load(輸出負載)	20%-80% Full Load,TH=5ms,TL=5ms,Slew rate=0.1A/us
4	Ambient Temp.(°C)(環境溫度)	- 10°C/50°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

I/P	85Vac/63Hz		265Vac/47Hz	
O/P	Max	Min	Max	Min
-10°C	25.0V	23.0V	25.0V	23.0V
50°C	24.8V	23.6V	24.8V	23.6V

※ Character Waveform (特性波形):

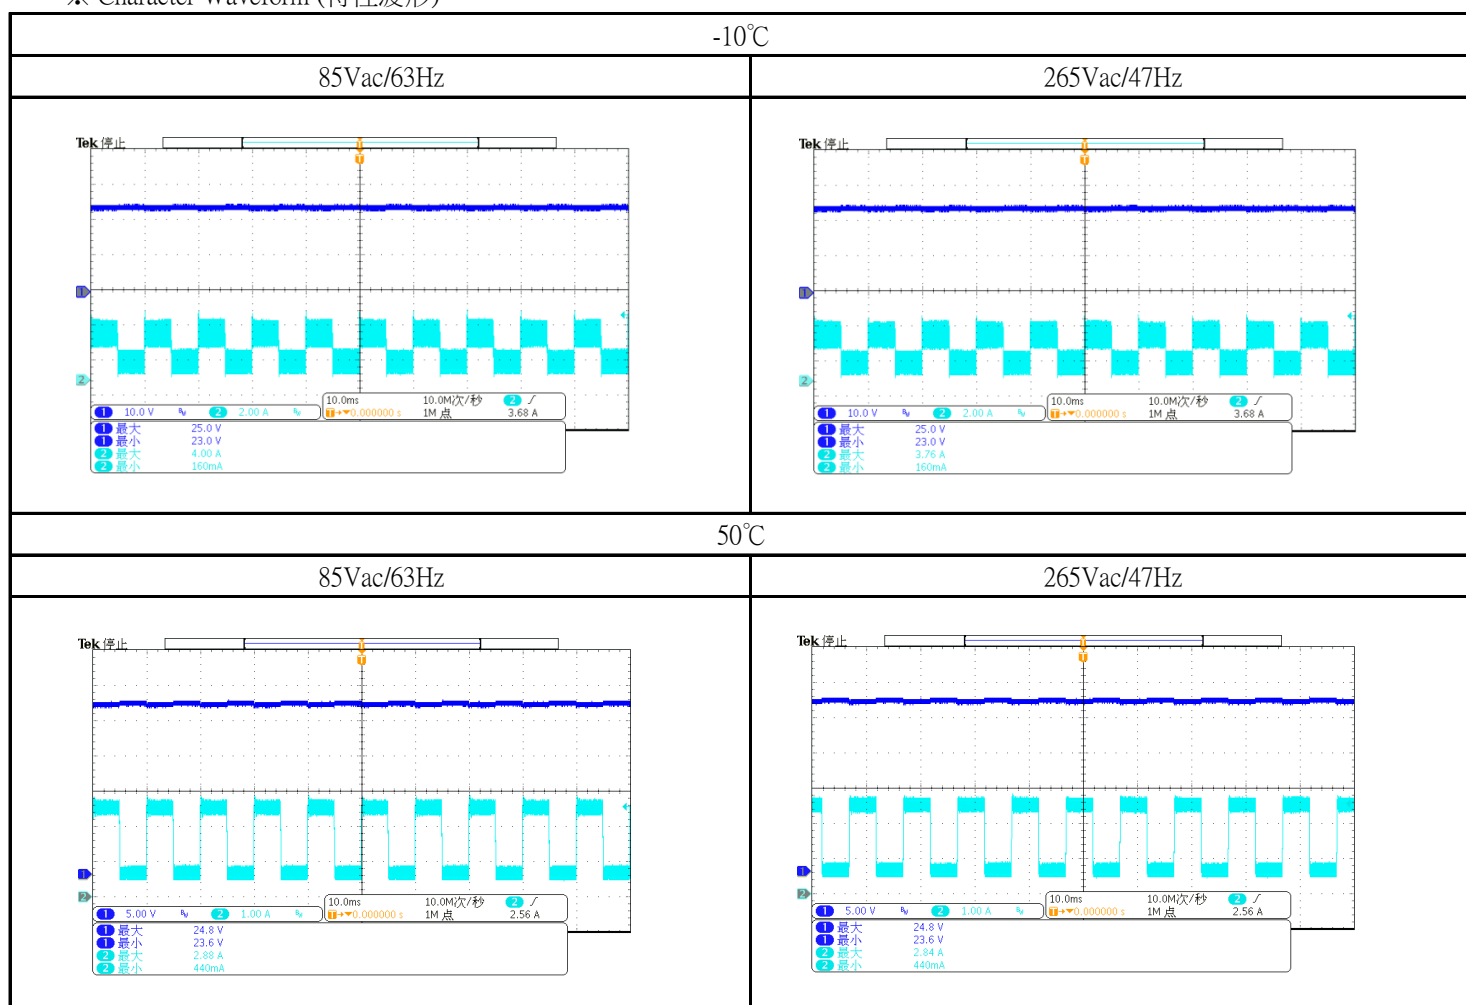

1-6.Efficiency Character(效率特性)

※ Character Condition(特性條件)：

1	I/P Voltage(Vac)(輸入電壓)	115Vac/230Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz / 60Hz
3	Output Load(輸出負載)	0%,10%,25%,50%,75%,100% of Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS
6	Output Load(輸出負載)	2.0A

※ Character Data(特性數據)：

使用線材	N/A
------	-----

Efficiency								Stand by consumption	
Load		10% 25% 50% 75% 100%						0%	
I/P		115Vac/60Hz			230Vac/50Hz			Input 115V/60Hz	230V/50HZ
O/P Load		Pin (W)	Pout (W)	Efficiency (%)	Pin (W)	Pout (W)	Efficiency (%)	0.05W	0.13W
10%	0.32A	8.08	7.290	90.22%	8.28	7.290	88.04%		
25%	0.8A	20.1	18.160	90.35%	19.87	18.170	91.44%		
50%	1.6A	40.2	36.120	89.85%	39.46	36.150	91.61%		
75%	2.4A	60.6	53.940	89.01%	59.21	53.960	91.13%		
100%	3.2A	80.9	71.550	88.44%	79.88	71.650	89.70%		
Average				89.41%			90.97%		

1-7.Input&Load Change Character(輸入& 負荷變動特性)

※ Character Condition(特性條件) :

1	I/P Voltage(Vac)(輸入電壓)	85Vac~265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz ~63Hz
3	Output Load(輸出負載)	No Load and Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS
6		

※ Character Equipment(特性設備) :

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	AC Source(變頻器)	ALL POWER/APG-1005N
2	Power Meter(功率表)	YOKOGAWA/WT310
3	DC Load(DC負載)	ITECH/IT8512+

※ Character Data(特性數據) :

Input change with no load			
No Load		Input Condition	
		85V/63Hz	265Vac/47Hz
	Input Current (A)	0.011	0.0259
	Input Power (W)	0.054	0.175
Input change with full load			
Full Load		Input Condition	
		85V/63Hz	265Vac/47Hz
	Input Current (A)	1.533	0.524
	Input Power (W)	85.168	83.195

1-8.Inrush Current (浪涌電流)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	100Vac/200Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz /60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

Inrush Current		
I/P \ O/P	Full Load	Full Load
	100Vac/60Hz	200Vac/50Hz
Character Result	11.6A	24.0A

※ Character Waveform (特性波形):

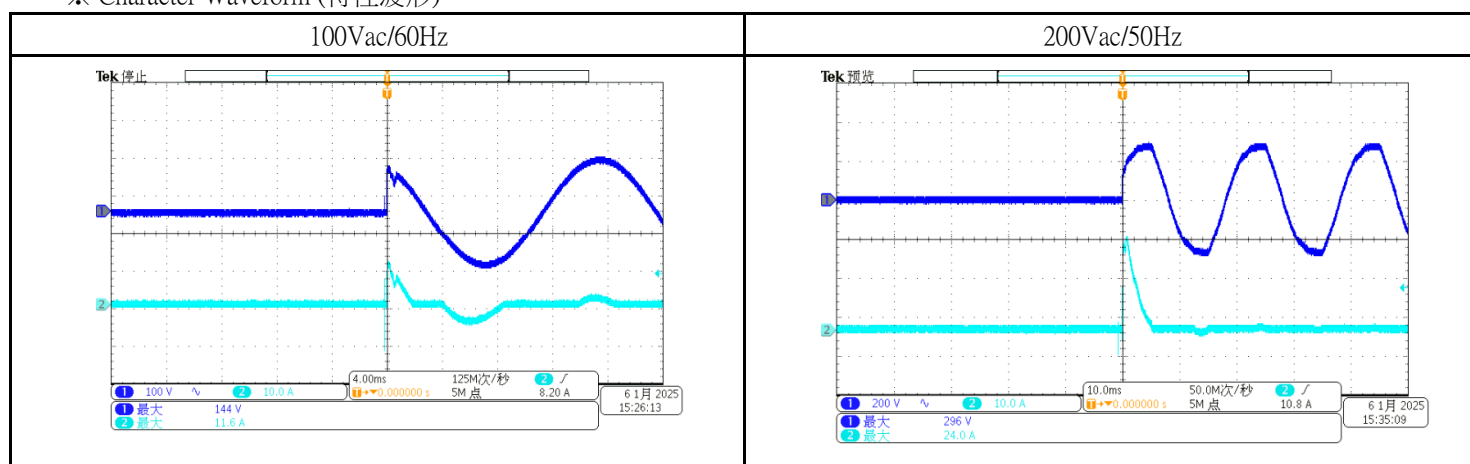

1-9.Turn On Delay(開機爬升延遲時間)


※ Character Condition(特性條件)：

1	I/P Voltage(Vac)(輸入電壓)	85Vac
2	I/P Frequency(Hz)(輸入頻率)	63Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據)：

Turn on delay time	
I/P	85Vac/63Hz
Character Result	2.27S

※ Character Waveform (特性波形)：

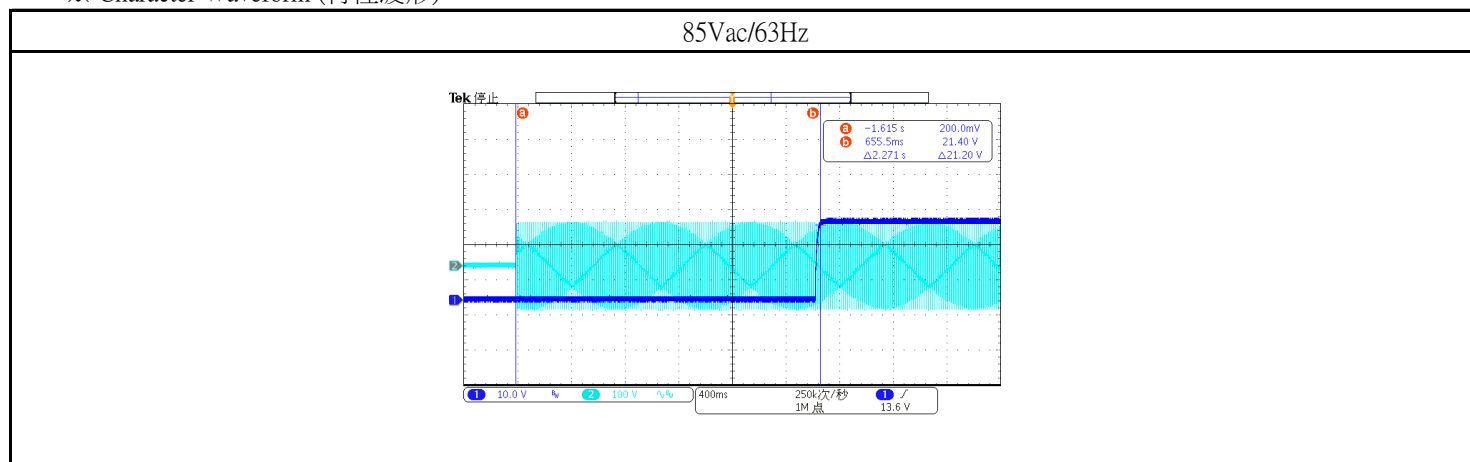

2-1. Hold Up Time Character (保持時間)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	100Vac
2	I/P Frequency(Hz)(輸入頻率)	60Hz
3	Output Load(輸出負載)	Full Load/70% Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※ Test Data(測試數據):

Hold up time	
Spec.	15.0mS Min
I/P	100Vac/60Hz
Test Result	17.21mS
Judgement	Pass

※ Test Waveform (測試波形):

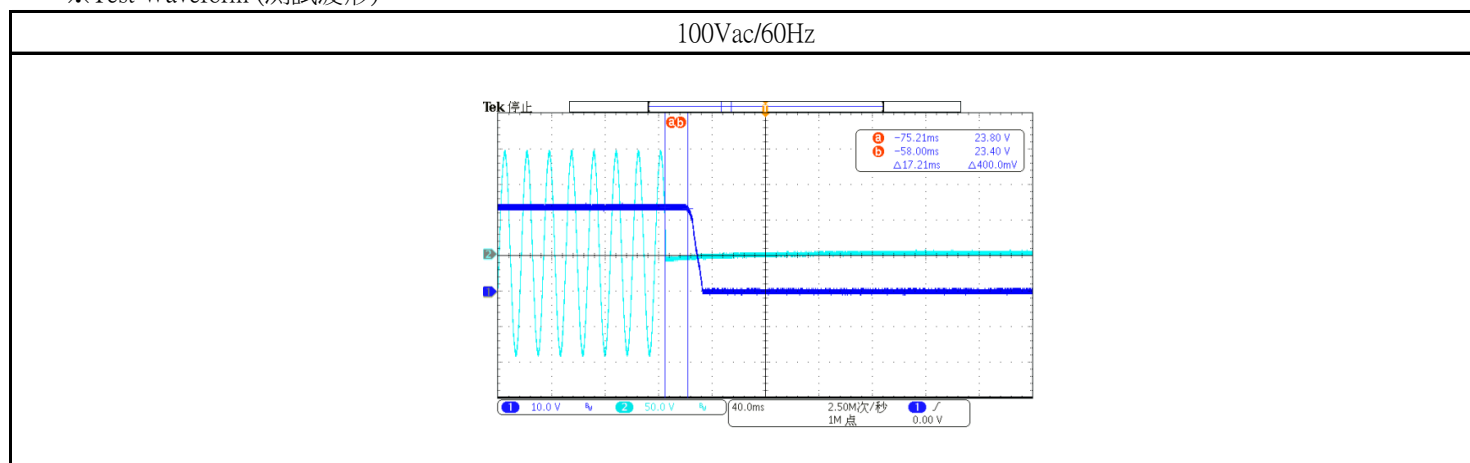

2-2. Low Vac Shut Off (輸入欠壓關斷特性)

※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	0~85Vac
2	I/P Frequency(Hz)(輸入頻率)	60Hz
3	Output Load(輸出負載)	Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

LOW Vac SHUT OFF	
0~85Vac Input	
O/P	Full Load
Brown in	75.0V
85~0Vac Input	
O/P	Full Load
Brown out	68.0V

2-3. Over Shoot(過沖特性)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	85Vac/265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz /63Hz
3	Output Load(輸出負載)	No Load/Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

Over Shoot				
O/P	No Load		Full Load	
I/P	85Vac/63Hz	265Vac/47Hz	85Vac/63Hz	265Vac/47Hz
Character Result	25.4V	25.4V	25.4V	25.4V

※ Character Waveform (特性波形):

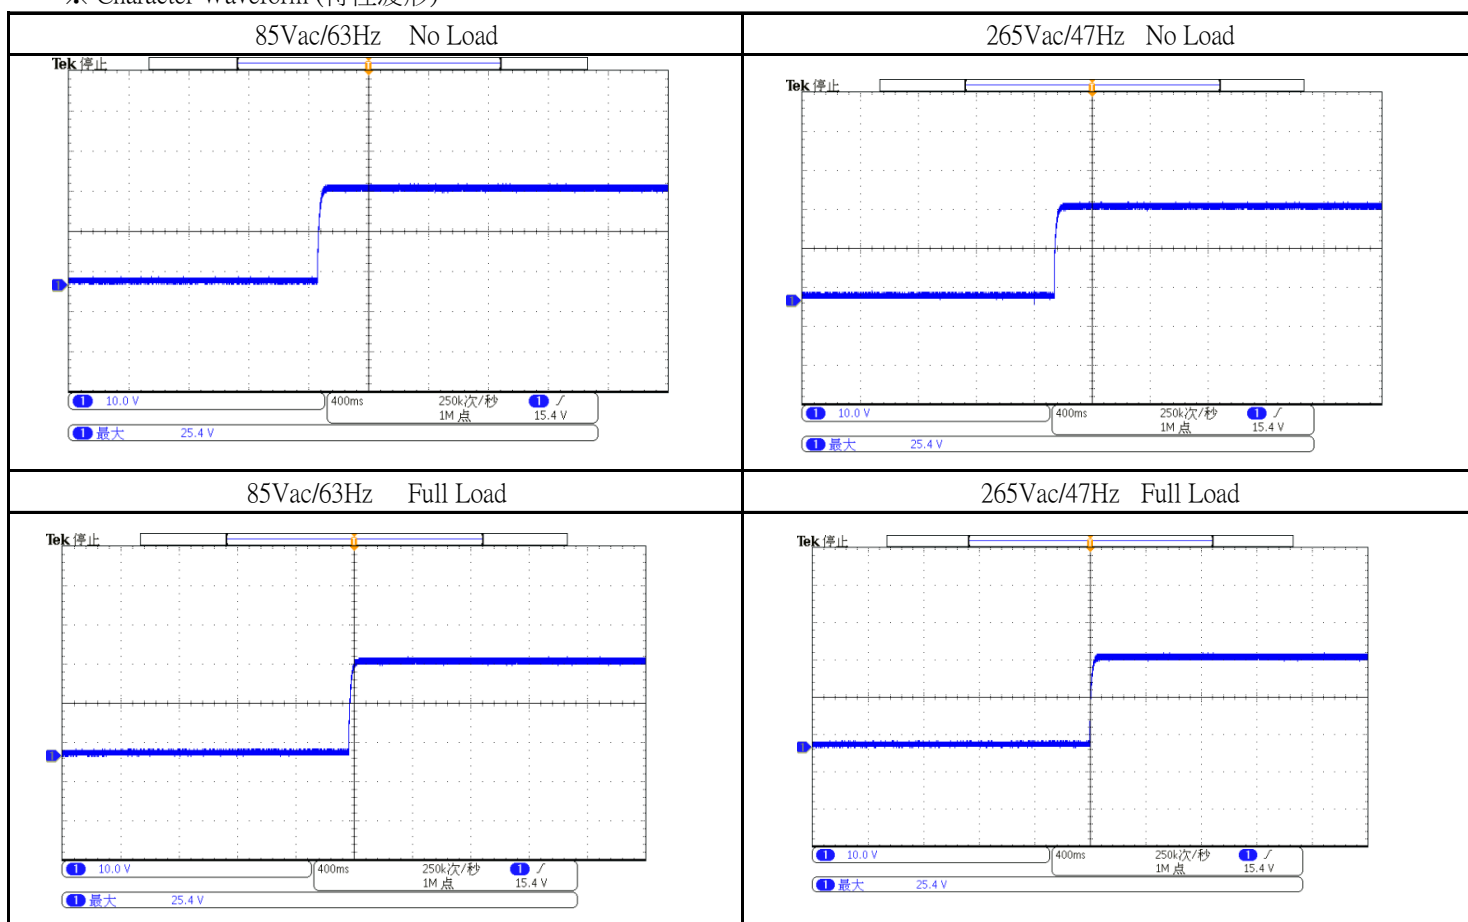

2-4.Under Shoot(下沖特性)


※ Character Condition(特性條件):

1	I/P Voltage(Vac)(輸入電壓)	85Vac/265Vac
2	I/P Frequency(Hz)(輸入頻率)	47Hz /63Hz
3	Output Load(輸出負載)	Low/Full Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS

※ Character Data(特性數據):

Under Shoot				
O/P	0.1A		Full Load	
I/P	85Vac/63Hz	265Vac/47Hz	85Vac/63Hz	265Vac/47Hz
Character Result	25.4V	25.4V	25.4V	25.4V

※ Character Waveform (特性波形):

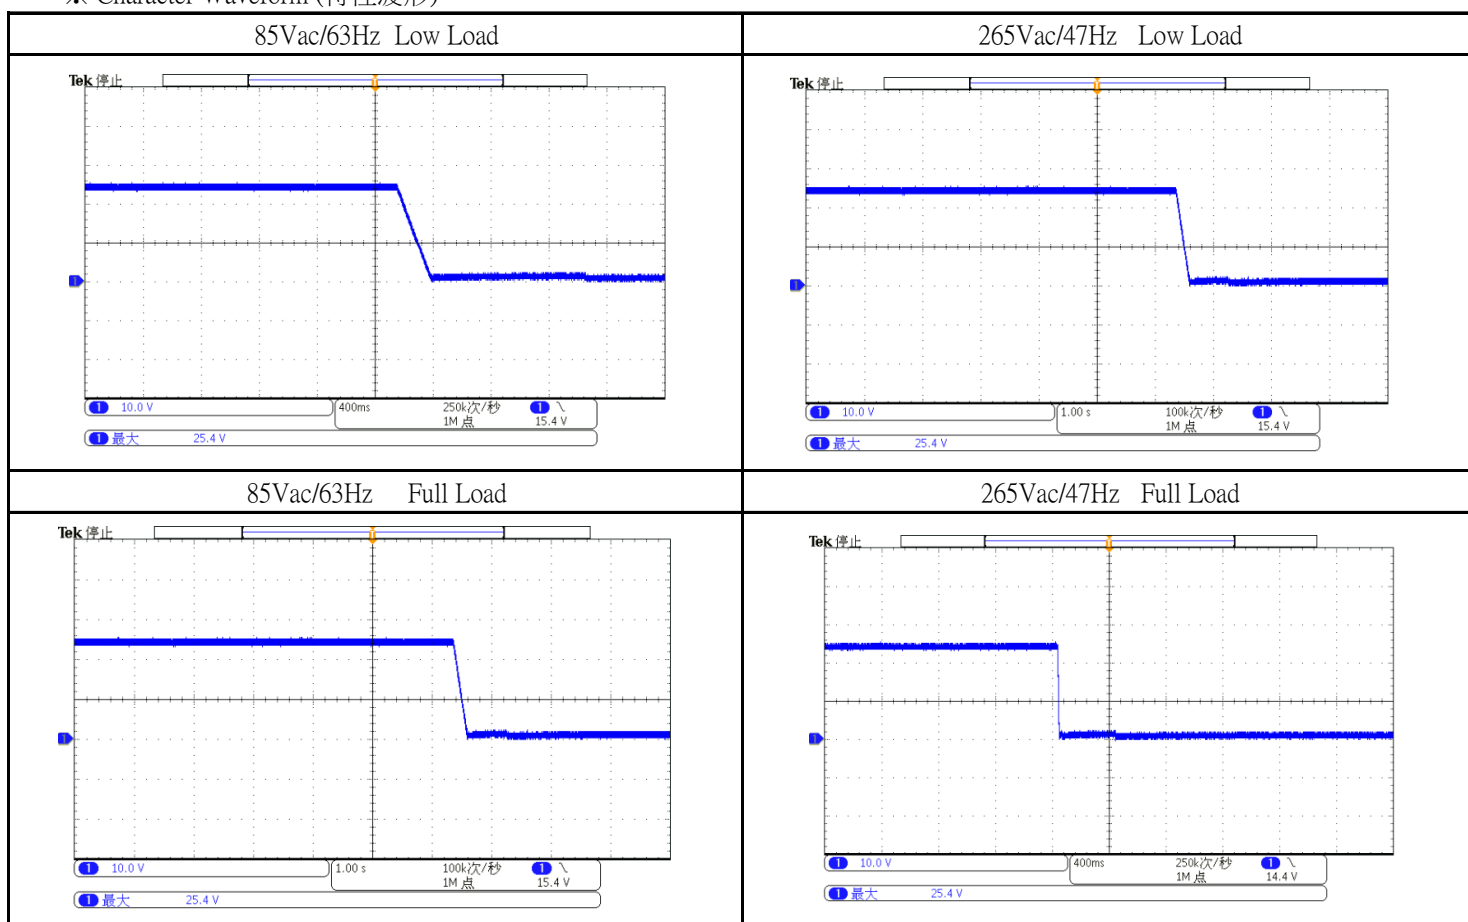

2-5.Leak Current(漏電流特性)

※Character Condition(特性條件) :

1	I/P Voltage(Vac)(輸入電壓)	265Vac
2	I/P Frequency(Hz)(輸入頻率)	50Hz
3	Output Load(輸出負載)	No Load
4	Ambient Temp.(°C)(環境溫度)	25°C
5	Sample Size(取樣數)	1PCS
6		

※Character Equipment(特性設備) :

ITEM	Equipment Item(設備)	Model No. / Manufacturer(製造商和型號)
1	Leak current Characterer(泄漏電流特性儀)	VG2301
2		
3		
4		

LEAK CURRENT CHARACTER

Spec.(mA MAX)	5
O/P	No Load
I/P	265Vac

※Character Data :

SINGLE-PHASE EQUIPMENT

The Character was made in all combinations to the normal and reverse polarity of the supply circuit(Polarity Switch P1)

Terminal A (Switch"s") of Measuring Instrument Connected to:	Switch"e" Position	Touch Current (mA r.m.s.)				
		Polarity P1/Primary Switch Condition				
		Normal/On	Normal/Off	Reverse/On	Reverse/Off	Judgement
Output	Closed	0.04	-	0.04	-	Pass

- ☐ The touch current [did not] exceed _____ mA r.m.s with terminal A connected to the earth terminal of the unit with Switch "e" opened.
- ☒ The touch current [did not] exceed 5 mA r.m.s with terminal A connected to the earth terminal of the unit with Switch "e" closed.