

UNDE 60W P Series

Peak Load AC/DC Adaptor



▲ UNDEI3060-XXXXXXPA



▲ UNDEB3060-XXXXXXPA



▲ UNDEC3060-XXXXXXPA



■ Please contact our sales department for safety standard of each model.



Product Highlights

- Stability
- Energy Efficiency
- LED Display (Optional)
- Peak Load 11 Sec. Function
- The Peak Load is Twice Rating Current.(Max.)
- Support Motor & Pump & Print

Protection

- Short Circuit Protection
- Over Voltage Protection
- Over Current Protection
- Over Temperature Protection (Optional)

Safety Standrd

- 60950-1
- 62368-1
- PSE 別表第八

Efficiency

- Energy Efficiency Level VI (ErP / DoE)
- Meet COMMISSION REGULATION(EU) 2019/1782
- Meet DOE 10 CFR part 429 and 430

Emissions

- FCC Part15 Class B
- CE CISPR 32 EN55032
- VCCI Class B

Immunity

- EN55024/A1:2001

Electrical Spec

Input					
Description	Min.	Typ.	Max.	Units	Comment
Voltage	90	100~240	264	Vac	
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min.	Typ.	Max.	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection,Sea Level
Storage Temperature	-20	-	65	°C	Free Convection,Sea Level
Operating Humidity	5	-	95	%RH	No Condensing
Storage Humidity	5	-	95	%RH	No Condensing


Typical model list

No.	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple	Noise	DC Output Peak Current	Time (sec)	Average Active Efficiency	No-Load Power Consumption	Option/Remark
1	12.0V	5.0A	±5%	240mV	480mV	8.0A	11sec	88.00%	0.21W	
2	15.0V	4.0A	±5%	240mV	480mV	6.8A	11sec	88.00%	0.21W	
3	19.0V	3.1A	±5%	240mV	480mV	5.27A	11sec	88.00%	0.21W	
4	24.0V	2.5A	±5%	240mV	480mV	5.1A	11sec	88.00%	0.21W	

■ Measurement Condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec

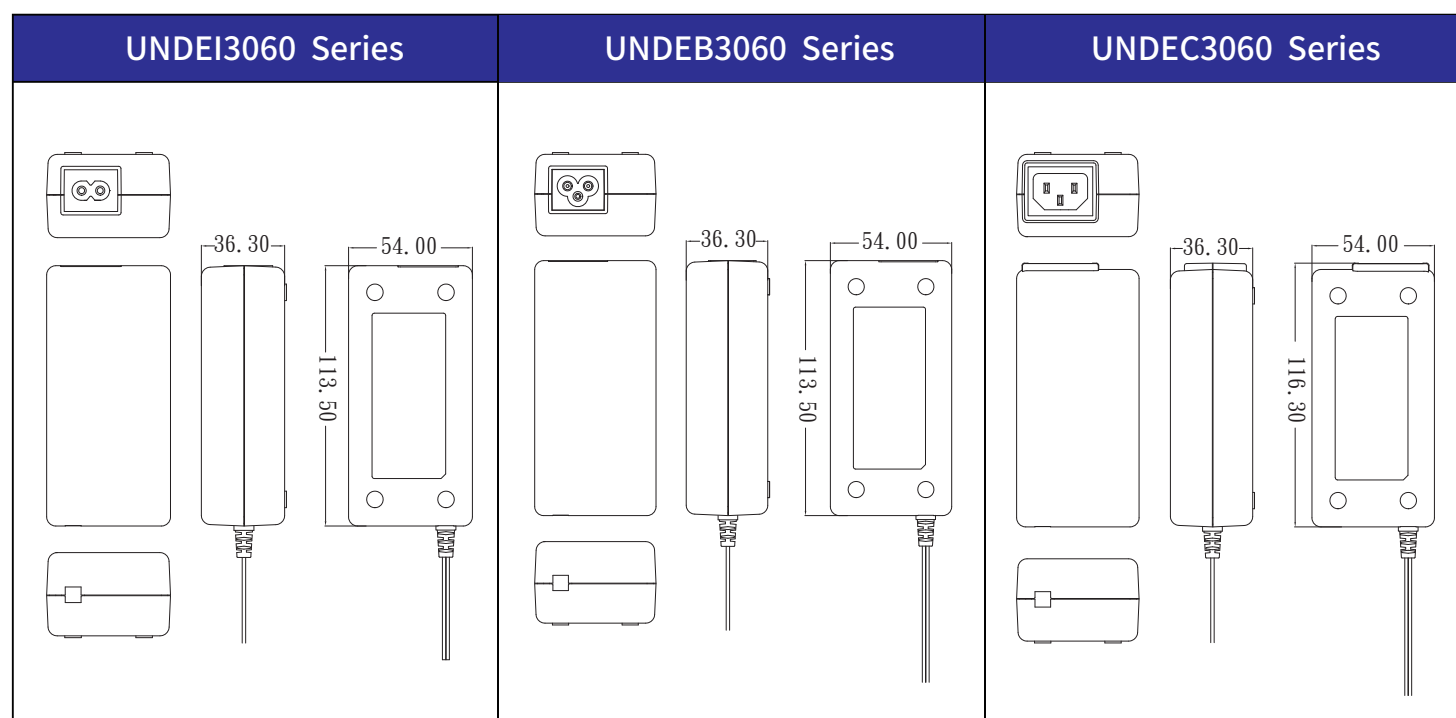

Mechanical Spec

UNDEI3060/LED Series	UNDEB3060/LED Series	UNDEC3060/LED Series
<p>Mechanical drawings for the UNDEI3060/LED Series. The drawings show the front, side, and rear views of the device. Dimensions are indicated: 36.30 (width), 54.00 (depth), and 113.50 (height).</p>	<p>Mechanical drawings for the UNDEB3060/LED Series. The drawings show the front, side, and rear views of the device. Dimensions are indicated: 36.30 (width), 54.00 (depth), and 113.50 (height).</p>	<p>Mechanical drawings for the UNDEC3060/LED Series. The drawings show the front, side, and rear views of the device. Dimensions are indicated: 36.30 (width), 54.00 (depth), and 116.30 (height).</p>

— the following blank —

■ Please contact our sales department for details of each model ■